



查询PM1205供应商

CLARE

MICRO CHIPS.
MACRO SOLUTIONS.

捷多邦，专业PCB打样工厂，24小时加急出货

PM1205 AC Power Switch



| | PM1205 | Units |
|-----------------------|--------|----------------------------------|
| AC Operating Voltage | 240 | V |
| Load Current | 500 | mA |
| On State Voltage Drop | 1.4 | V_{RMS} (at $I_L = 500$ mA) |

Features

- Load Current up to 0.5A
- 500V Blocking Voltage
- 5mA Sensitivity
- Zero-Crossing Detection
- DC Control, AC Output
- Optically Isolated
- TTL and CMOS Compatible
- Low EMI and RFI Generation
- High Noise Immunity
- VDE compatible
- Machine Insertable, Wave Solderable

Applications

- Programmable Control
- Process Control
- Power Control Panels
- Remote Switching
- Gas Pump Electronics
- Contractors
- Large Relays
- Solenoids
- Motors
- Heaters

Description

The PM1205 is a AC Solid State Switch using optical coupling with dual power SCR outputs to produce an alternative to optocoupler and Triac circuits. The PM1205 switches are robust enough to provide a blocking voltage of up to 500V. In addition, tightly controlled zero cross circuitry ensures switching of AC loads without the generation of transients. The input and output circuits are optically coupled to provide 3750V of isolation and noise immunity between control and load circuits. As a result the PM1205 is well suited for industrial environments where electromagnetic interference could disrupt the operation of electromechanical relays.

Approvals


- UL recognized file #: E69938
- CSA certified file #: LR 43639-8

Ordering Information

| Part # | Description |
|-----------|---------------------------------|
| PM1205 | 6 Pin Dip (50/Tube) |
| PM1205S | 6 Pin Surface Mount (50/Tube) |
| PM1205STR | 6 Pin Surface Mount (1000/Reel) |

Pin Configuration

PM1205 Pinout

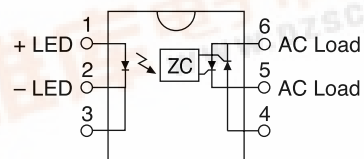



PM1205

Absolute Maximum Ratings (@ 25° C)

| Parameter | Min | Typ | Max | Units |
|--|------|-----|------------------|------------------|
| Input Power Dissipation | - | - | 150 ¹ | mW |
| Input Control Current Peak (10ms) | - | - | 50 1 | mA A |
| Reverse Input Voltage | - | - | 5 | V |
| Total Package Dissipation PM | - | - | 800 ² | mW |
| Isolation Voltage Input to Output | 3750 | - | - | V _{RMS} |
| Operational Temperature | -40 | - | +85 | °C |
| Storage Temperature | -40 | - | +125 | °C |
| Soldering Temperature DIP Package | - | - | +260 | °C |
| Surface Mount Package (10 Seconds Max.) | - | - | +220 | °C |

¹ Derate Linearly 1.33 mW/°C

² Derate Linearly 6.67 mW/°C

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this data sheet is not implied. Exposure of the device to the absolute maximum ratings for an extended period may degrade the device and effect its reliability.






Electrical Characteristics

| Parameters | Conditions | Symbol | Min | Typ | Max | Units |
|--|----------------------------|-------------------|-------|------|-----|------------------|
| Output Characteristics @ 25°C | | | | | | |
| AC Operating Voltage | V _T | - | 20 | - | 240 | V _{RMS} |
| Peak Blocking Voltage | - | V _{DRM} | - | - | 500 | V |
| Load Current (Continuous) | V _L =120-240VAC | I _L | 0.005 | - | 0.5 | A |
| Off State Leakage Current | V _{DRM} | I _{LEAK} | - | - | 1 | mA |
| On-State Voltage Drop | - | - | - | - | 1.4 | V _{RMS} |
| Critical Rate of Rise | - | dv/dt | 1000 | 1200 | - | V/μS |
| Switching Speeds | | | | | | |
| Turn-on | I _F =5 mA | T _{ON} | - | - | 0.5 | cycles |
| Turn-off | I _F =5 mA | T _{OFF} | - | - | 0.5 | cycles |
| Zero-Cross Turn-On Voltage | 1st half cycle | - | - | 2 | 5 | V |
| Sub. half cycle | - | - | - | 1 | V | V |
| Operating Frequency ¹ | - | - | 20 | - | 500 | Hz |
| Load Power Factor for Guaranteed Turn-On ² | - | PF | 0.25 | - | - | - |
| Input Characteristics @ 25°C | | | | | | |
| Input Control Current | - | I _F | 5 | - | 50 | mA |
| For Normal Environment | - | I _F | 10 | - | 100 | mA |
| For High Noise Environment | - | I _F | 0.9 | 1.2 | 1.4 | V |
| Input Voltage Drop | I _F =5mA | V _F | 0.9 | 1.2 | 1.4 | V |
| Input Drop-out Voltage | - | - | 0.8 | - | - | V |
| Reverse Input Current | V _R =5V | I _R | - | - | 10 | mA |
| Common Characteristics @ 25°C | | | | | | |
| Input to Output Capacitance | - | C _{I/O} | - | 3 | - | pF |
| Input to Output Isolation | - | V _{I/O} | 3750 | - | - | V _{RMS} |

¹ Zero Cross 1st half cycle @ <100Hz

² Snubber circuits may be required at low power factors.


PERFORMANCE DATA*

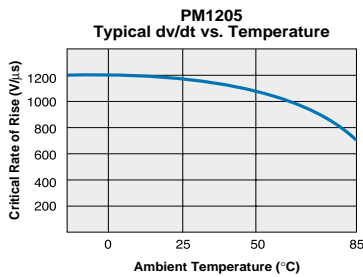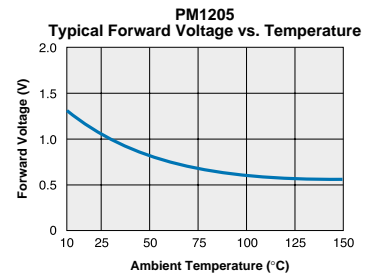


The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

Mechanical Dimensions


6 Pin Power DIP Through Hole (Standard)

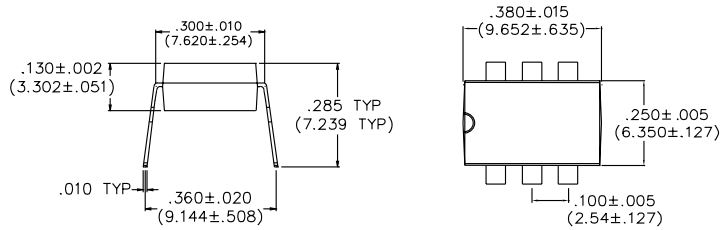


PC Board Pattern (Top View)

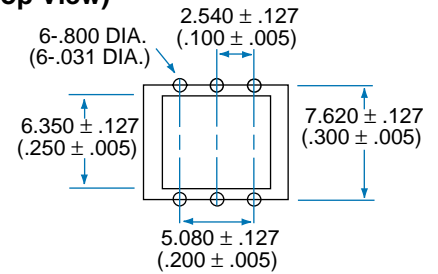


6 Pin Power DIP Surface Mount ("S" Suffix)

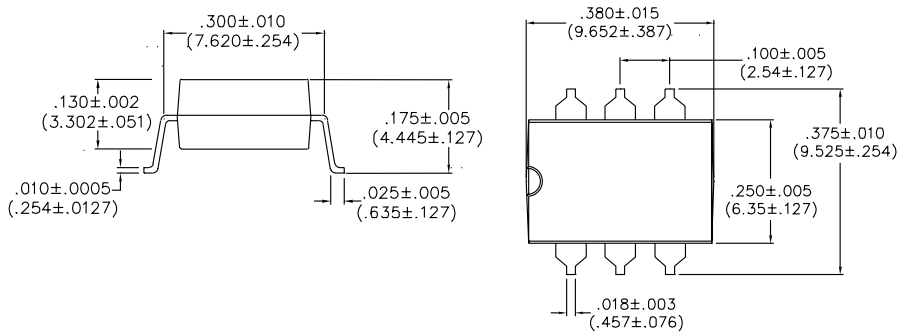

PC Board Pattern (Top View)

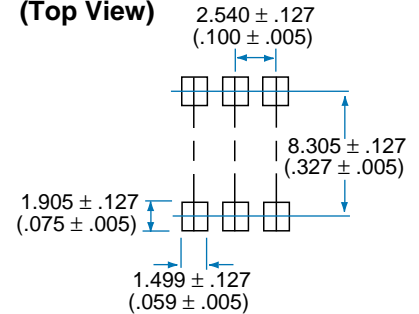

Tape and Reel Packaging for 6 Pin Power DIP Surface Mount Package

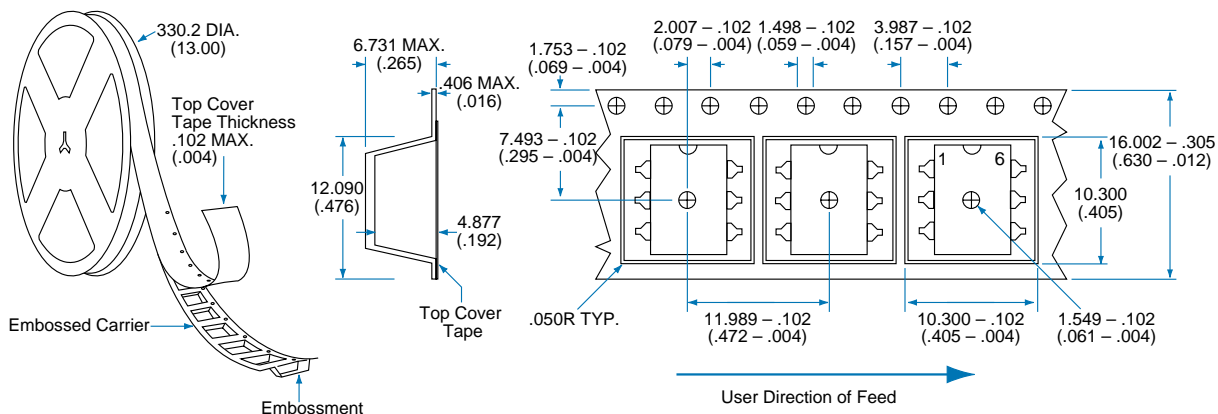



CLARE

MICRO CHIPS.
MACRO SOLUTIONS.

Worldwide Sales Offices

CLARE LOCATIONS

Clare Headquarters
78 Cherry Hill Drive
Beverly, MA 01915
Tel: 1-978-524-6700
Fax: 1-978-524-4900
Toll Free: 1-800-27-CLARE

Clare Micronix Division
145 Columbia
Aliso Viejo, CA 92656-1490
Tel: 1-949-831-4622
Fax: 1-949-831-4628

SALES OFFICES

AMERICAS

Americas Headquarters

Clare
78 Cherry Hill Drive
Beverly, MA 01915
Tel: 1-978-524-6700
Fax: 1-978-524-4900
Toll Free: 1-800-27-CLARE

Eastern Region

Clare
P.O. Box 856
Mahwah, NJ 07430
Tel: 1-201-236-0101
Fax: 1-201-236-8685
Toll Free: 1-800-27-CLARE

Central Region

Clare Canada Ltd.
3425 Harvester Road, Suite 202
Burlington, Ontario L7N 3N1
Tel: 1-905-333-9066
Fax: 1-905-333-1824

Western Region

Clare
1852 West 11th Street, #348
Tracy, CA 95376
Tel: 1-209-832-4367
Fax: 1-209-832-4732
Toll Free: 1-800-27-CLARE

Canada

Clare Canada Ltd.
3425 Harvester Road, Suite 202
Burlington, Ontario L7N 3N1
Tel: 1-905-333-9066
Fax: 1-905-333-1824

EUROPE

European Headquarters

CP Clare nv
Bampslaan 17
B-3500 Hasselt (Belgium)
Tel: 32-11-300868
Fax: 32-11-300890

France

Clare France Sales
Lead Rep
99 route de Versailles
91160 Champlan
France
Tel: 33 1 69 79 93 50
Fax: 33 1 69 79 93 59

Germany

Clare Germany Sales
ActiveComp Electronic GmbH
Mitterstrasse 12
85077 Manching
Germany
Tel: 49 8459 3214 10
Fax: 49 8459 3214 29

Italy

C.L.A.R.E.s.a.s.
Via C. Colombo 10/A
I-20066 Melzo (Milano)
Tel: 39-02-95737160
Fax: 39-02-95738829

Sweden

Clare Sales
Comptronic AB
Box 167
S-16329 Spånga
Tel: 46-862-10370
Fax: 46-862-10371

United Kingdom

Clare UK Sales
Marco Polo House
Cook Way
Bindon Road
Taunton
UK-Somerset TA2 6BG
Tel: 44-1-823 352541
Fax: 44-1-823 352797

ASIA PACIFIC

Asian Headquarters

Clare
Room N1016, Chia-Hsin, Bldg II,
10F, No. 96, Sec. 2
Chung Shan North Road
Taipei, Taiwan R.O.C.
Tel: 886-2-2523-6368
Fax: 886-2-2523-6369

<http://www.clare.com>

Clare cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in this Clare product. No circuit patent licenses nor indemnity are expressed or implied. Clare reserves the right to change the specification and circuitry, without notice at any time. The products described in this document are not intended for use in medical implantation or other direct life support applications where malfunction may result in direct physical harm, injury or death to a person.