



查询PSA2100C供应商

Z-Communications, Inc.


9939 Via Pasar • San Diego, CA 92126
TEL (858) 621-2700 FAX (858) 621-2722

捷多邦，专业PCB打样工厂，24小时加急出货

PSA2100C

PHASE LOCKED LOOP

Rev A1

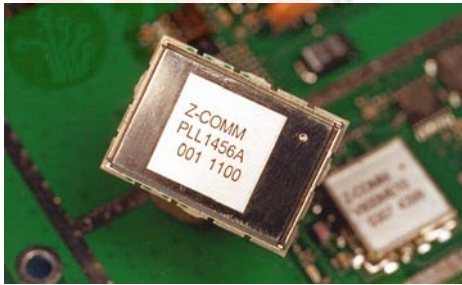


FEATURES

- Frequency Range: 2066 - 2128 MHz
- Step Size: 1000 KHz
- PLL-24H - Style Package

APPLICATIONS

- Telecommunications
- Satellite
- Telemetry

PHASE NOISE (1 Hz BW, typical)

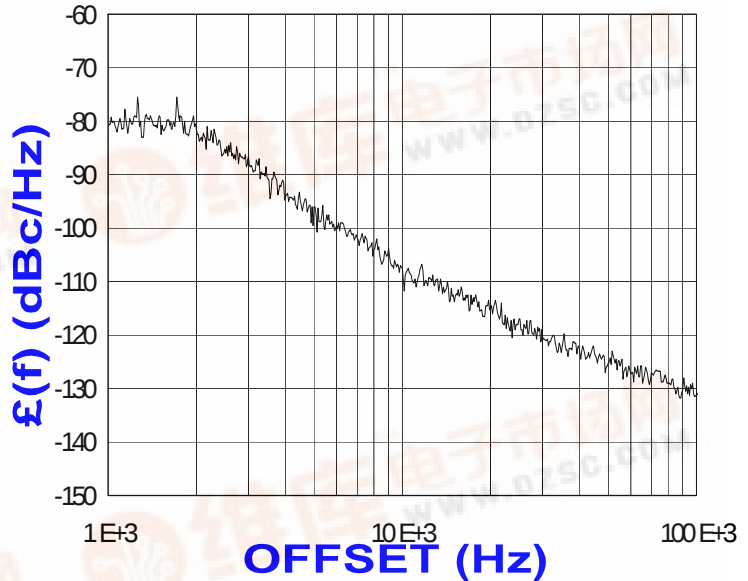

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Frequency Range	2066 - 2128	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-107	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Sideband Spurs (typ.)	-70	dBc
Power Output	0±3	dBm
Load Impedance	50	Ω
Step Size	1000	KHz
Charge Pump Output Current	1250	μA
Switching Speed (typ., adjacent channel)	1.5	mSec
Startup Lock Time (typ.)	2	mSec
Operating Temperature Range	-40 to 70	°C
Package Style	PLL-24H	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	30	mA

All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES


- AN-107 : How to Solder Z-COMM VCOs / PLLs
- AN-200 : Mounting and Grounding of Z-COMM PLLs
- AN-201 : PLL Fundamentals AN-202 : PLL Functional Description

NOTES:


Reference Oscillator Signal: $5 \text{ MHz} < f_{\text{osc}} < 100 \text{ MHz}$
Frequency Synthesizer: Analog Devices - ADF4106

Prescaler: 32


VCO TUNING CURVE, typ.

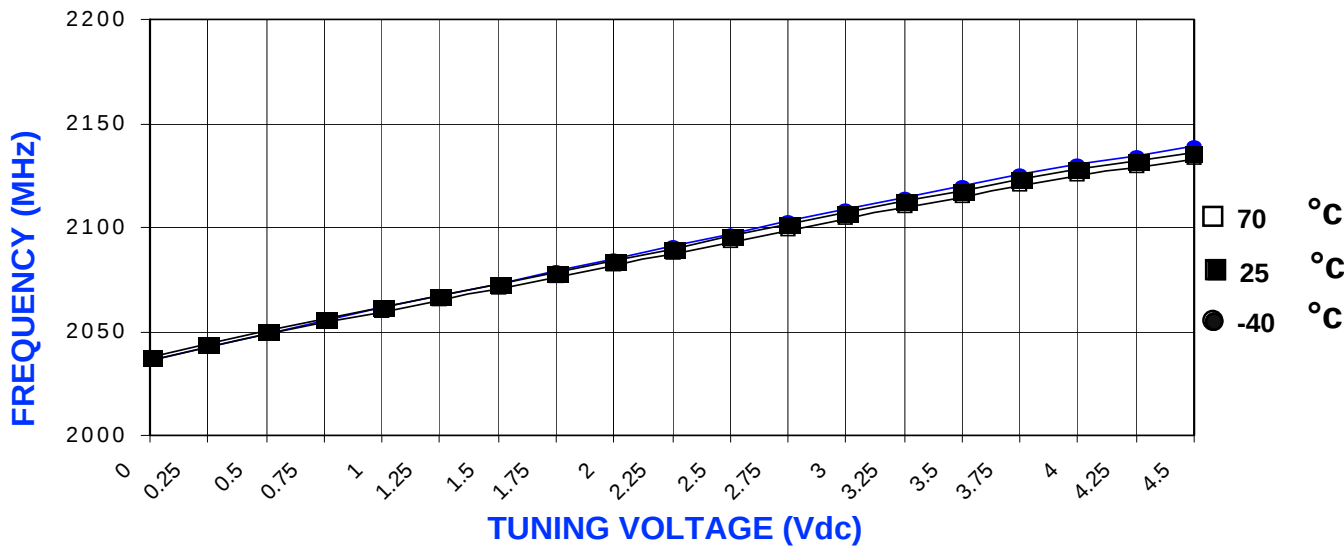

VCO POWER CURVE, typ.

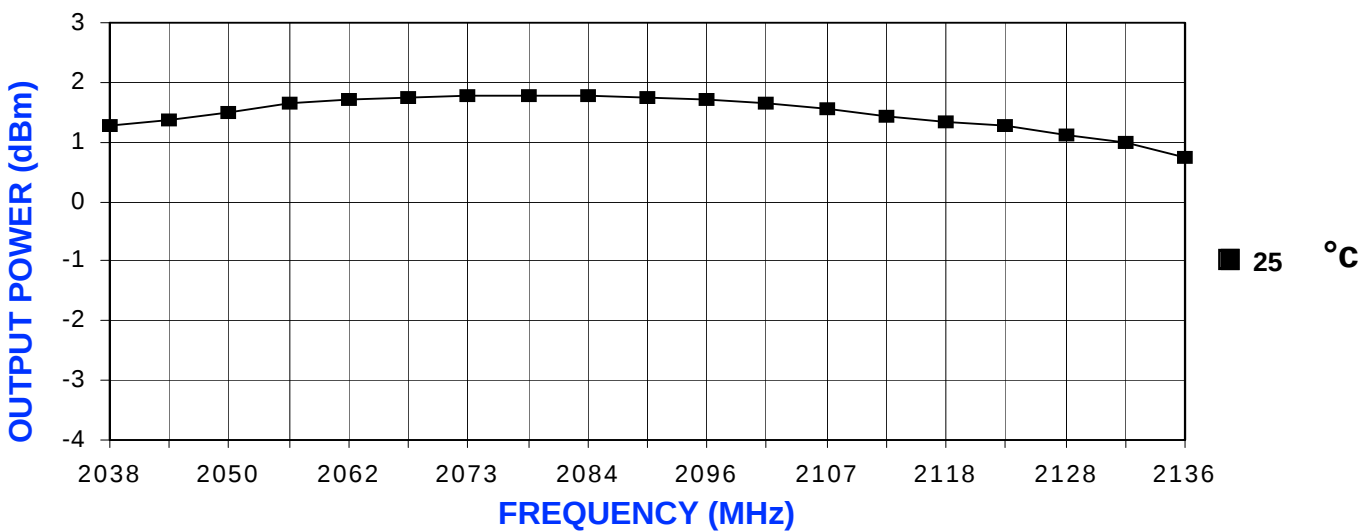

PHYSICAL DIMENSIONS

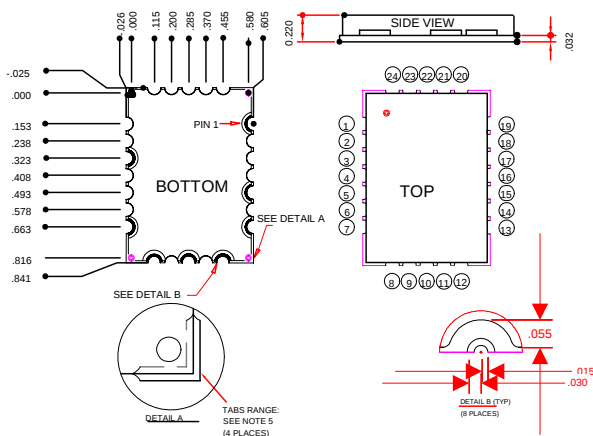

1. The inside radius of all 24 half holes at the perimeter of the board are plated to provide a surface for the attachment of the PLL Module to the PCB. 16 pads are for grounding, 8 pads are for signal interface.
2. The surface of the shield is tin-plated and may be soldered to. The shield's base metal is cold-rolled steel.
3. The ground plane on the bottom side is ground and attaches to a ground track on the top side of the board as well as to the shield.
4. Unless otherwise noted all dimensions are in inches.
5. Unless otherwise noted all tolerances are as follows:
.xxx = ± .010.

P1 RF OUTPUT
P2.4 GROUND
P5 REFERENCE OSCILLATOR INPUT
P6 GROUND
P7 CLOCK
P8 DATA
P9 GROUND
P10 LOAD ENABLE
P11 GROUND
P12 LOCK DETECT
P13 VCC
P14 GROUND
P15 GROUND
P16 GROUND
P17 NO CONNECTION
P18-24 GROUND