


PT5040 Series

1 AMP STEP-UP INTEGRATED SWITCHING REGULATOR


Revised 6/30/98

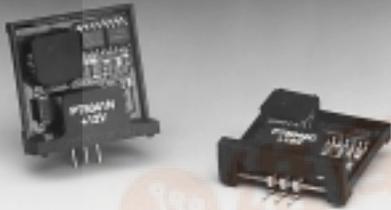

- Wide Input Voltage Range
- 85% Efficiency
- Internal Over-Temperature Protection
- Laser-trimmed Output Voltage
- Soft Start

The Power Trends' PT5040 Series is a 3-terminal Integrated Switching Regulator (ISR) designed for use with +5 volt systems that require an additional regulated +8 to +20 volts with up to 1A of output current. These ISRs are packaged in the 3 pin SIP configuration.


Standard Application

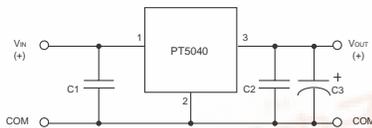

C₁ = Optional ceramic (1-5µF)
 C₂ = Optional ceramic (1-5µF)
 C₃ = Required Electrolytic (100µF)

Pin-Out Information

Pin	Function
1	V _{in}
2	GND
3	V _{out}



Ordering Information

- PT5041□ = +12 Volts
- PT5042□ = +15 Volts
- PT5044□ = +8 Volts
- PT5045□ = +9 Volts
- PT5046□ = +10 Volts
- PT5047□ = +18 Volts
- PT5048□ = +12.6 Volts
- PT5049□ = +20 Volts

PT Series Suffix (PT1234X)

Case/Pin Configuration	Suffix
Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

Specifications

Characteristics (T _a =25°C unless noted)	Symbols	Conditions	PT5040 SERIES			
			Min	Typ	Max	Units
Output Current	I _o	Over V _{in} range	V _o =20V 0.1*	—	0.5	A
			V _o =18V 0.1*	—	0.6	A
			V _o =12V 0.1*	—	1.0	A
			V _o =15V 0.1*	—	0.75	A
			V _o =8V 0.1*	—	1.5	A
			V _o =9V 0.1*	—	1.25	A
Current Limit**	I _{cl}	V _{in} = +5V	—	1.5 I _{o,max}	—	A
Inrush Current	I _{ir} t _{ir}	V _{in} = +5V @ max I _o On start up	—	2.5 1	—	A mSec
Input Voltage Range	V _{in}	I _o = 0.1 to I _{o,max}	4.75 PT5047/5049 4.75	—	(V _o -1V) 14	V V
Output Voltage Tolerance	ΔV _o	Over V _{in} Range I _o = I _{max} , T _a = -20°C to shutdown	—	±1.5	±3.0	%V _o
Line Regulation	Reg _{line}	Over V _{in} range	—	±0.5	±1.0	%V _o
Load Regulation	Reg _{load}	0.1 ≤ I _o ≤ I _{o,max}	—	±0.5	±1.0	%V _o
V _o Ripple/Noise	V _n	V _{in} = +5V, I _o = I _{o,max}	—	±2	±5	%V _o
Transient Response	t _{tr} V _{os}	25% load change V _o over/undershoot	—	500 3.0	— 5.0	µSec %V _o
Efficiency	η	V _{in} = +5V, I _o = 0.5A, V _o = +12V	—	85	—	%
Switching Frequency	f _o	Over V _{in} and I _o ranges	V _o < 15V 500 V _o ≥ 15V 650	650 800	800 950	kHz kHz
Absolute Maximum Operating Temperature Range	T _a	—	-20	—	+85	°C
Recommended Operating Temperature Range	T _a	Free Air Convection, (40-60LFM) Over V _{in} and I _o ranges	V _o < 15V -20 V _o ≥ 15V -20	—	70*** 55***	°C °C
Thermal Resistance	θ _{ja}	Free Air Convection (40-60LFM)	—	40	—	°C/W
Storage Temperature	T _s	—	-40	—	+125	°C
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3 1 msec, Half Sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC Board	—	5	—	G's
Weight	—	—	—	4.5	—	grams

NOTE: Boost Topology ISRs are not Short-Circuit Protected.

ISR will operate down to no load with reduced specifications.

** Boost topology ISRs are not short circuit protected.





*** See SOA Curves.







CHARACTERISTIC DATA

PT5040 Series

PT5041, +12.0 VDC (See Note 1)

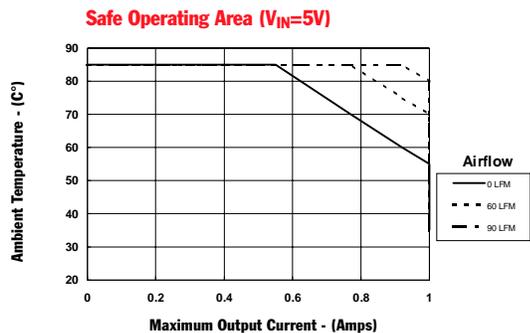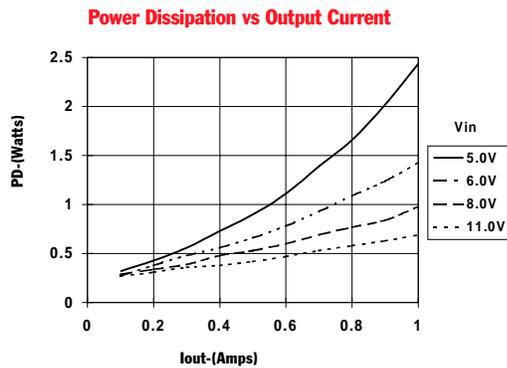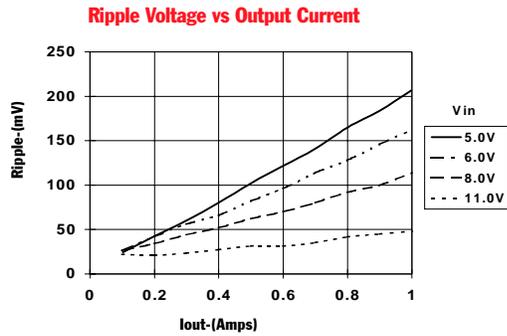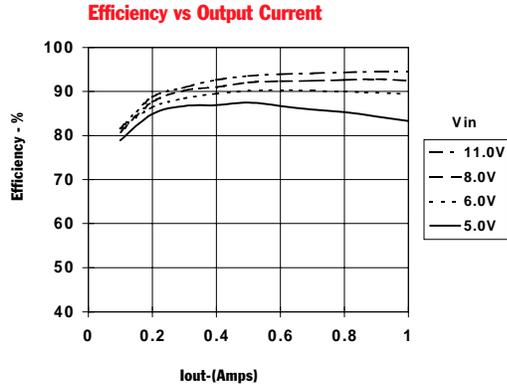

PT5042, +15.0 VDC (See Note 1)

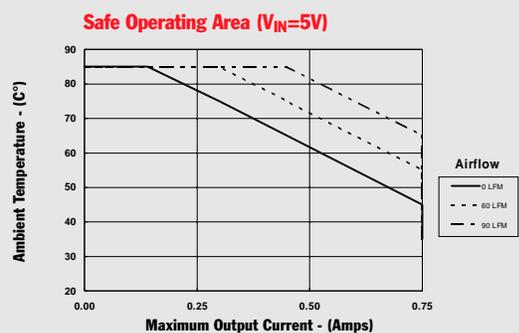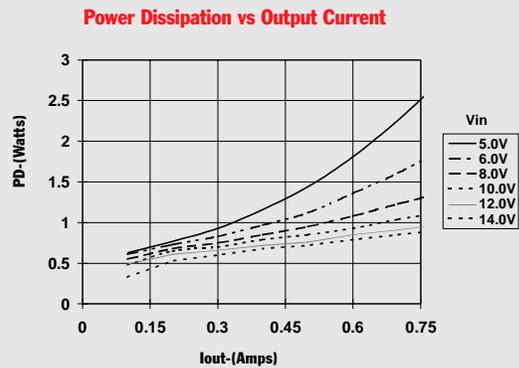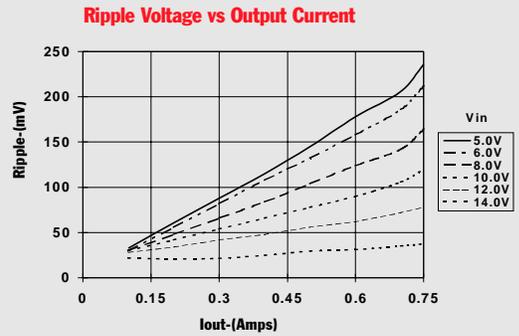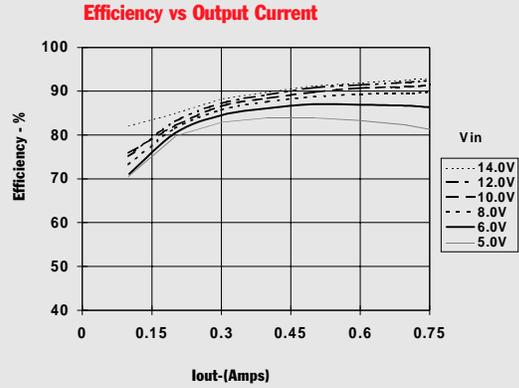

Note 1: All data listed in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.