查询RF1181D供应商



## FRIF IMI.

- Ideal Front-End Filter for 916.5 MHz Wireless Receivers
- Low-Loss, Coupled-Resonator Quartz Design
- Simple External Impedance Matching
- Complies with Directive 2002/95/EC (RoHS)

The RF1181D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 916.5 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remotecontrol and security, data telemetry, and meter reading devices operating in the USA under FCC Part 15 and in Canada under DoC RSS-210.

Pb

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFM's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching (not included). Our new patent pending solder seal process utilizes a Faraday shield lid, which improves out of band rejection.

# 916.5 MHz

**RF1181D** 

# SAW Filter



#### **Electrical Characteristics**

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25°C	Absolute Frequency	f <sub>c</sub>	1.0.0		916.5		MHz
	Tolerance from 916.50 MHz	$\Delta f_c$	1, 2, 3				kHz
Insertion Loss	W W W	IL	1, 3		2.5	4.0	dB
3 dB Bandwidth	P	BW3	1, 3	500	600	900	kHz
Rejection (Attenuation: relative to Min IL:) 10 to 895 MHz				40	50	17.100	
	895 to 906 MHz			30	35	13.00	4
	906 to 910 MHz			25	30	- C.C.C.	
	922 to 925 MHz		1, 3	35	40		dB
	925 to 933 MHz		2. 697	14	18		
	933 to 940 MHz	0-	12	30	35		
	940 to 1100 MHz		W -	40	45		
Temperature Freq. Temp. Coefficient		FTC	3, 4		0.032		ppm/°C <sup>2</sup>
Frequency Aging	Absolute Value during the First Year	fA	5		≤10		ppm/yr
and life	Input $Z_{IN} = R_{IN}/C_{IN}$	Z <sub>IN</sub>		37Ω // 1.6pF			
Impedance @ f <sub>C</sub>	ce @ f <sub>C</sub> Output Z <sub>OUT</sub> = R <sub>OUT</sub> /C <sub>OUT</sub>		1	25Ω // 1.8pF			
Lid Symbolization (in addition	on to Lot and/or Date Codes)	Z <sub>OUT</sub>	1	435	// YWWS	- 17,100	
Standard Reel Quantity 7 Inch Reel			0	500 Pieces/Reel			
Standard Reel Quantity 13 Inch Reel			9	3000 Pieces/Reel			

### Ŷ

### CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

#### Notes:

- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f<sub>c</sub>. Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
- 2. The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
- 3. Where noted specifications apply over the entire specified operating temperature range of -40 to 90°C.
- 4. The turnover temperature,  $T_0$ , is the temperature of maximum (or turnover) frequency,  $f_0$ . The nominal frequency at any case temperature,  $T_c$ , may be calculated from:  $f = f_0 [1 - FTC (T_0 - T_c)^2]$ .
- 5. Frequency aging is the change in fc with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.

The design, manufacturing process, and specifications of this device are subject to change.

One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.

All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.


Tabe and Reel Standard for ANSI/EIA 481.

RF1181D\_013

#### 15 Jul 2004 14:15:57 CH1 S<sub>11</sub> 1 U FS 1\_ 52.557 Ω -5.377 □ 32.3 pF AUX^ 916.400 000 MHz PRm Cor HId s <sub>22</sub> 1\_: 52.729 CH2 1 U FS Ω -2.1855 D 79.465 pF 916.400 000 MHz PRm Cor HId CENTER 916.500 000 MHz SPAN 4.000 000 MHz RF1181D\_013

### HJ 7/15/04 RF1181D demo board

#### HJ 7/15/04 RF1181D demo board

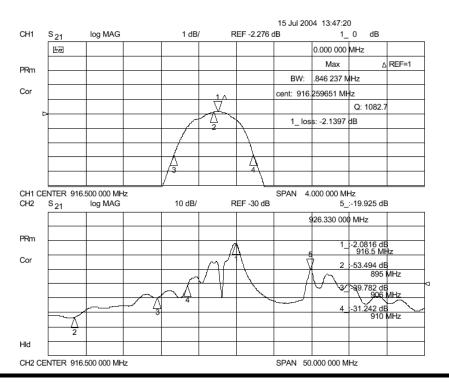


DE Manalithias Inc. Dhanas (072) 222 2002

#### **Absolute Maximum Ratings**


Rati	Value	Units	
Input Power Level		10	dBm
DC Voltage		12	VDC
Storage Temperature		-40 to +125	°C
Operable Temperature Range		-40 to +125	°C
Soldering Temperature	(10 seconds / 5 cycles max.)	260	°C

#### **Electrical Connections**

Pin	Connection		
1	Input Ground		
2	Input		
3	Ground		
4	Case Ground		
5	Output Ground		
6	Output		
7	Ground		
8	Case Ground		

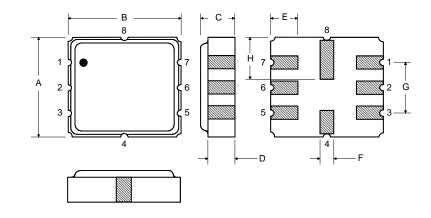

#### Matching Circuit to $50\Omega$

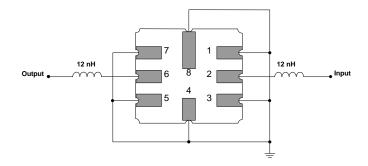

#### **Case Dimensions**

Dimension	mm			Inches			
Dimension	Min	Nom	Max	Min	Nom	Max	
Α	3.6	3.8	4.0	0.14	0.15	0.16	
В	3.6	3.8	4.0	0.14	0.15	0.16	
С	1.00	1.20	1.40	0.04	0.05	0.055	
D	0.95	1.10	1.25	0.037	0.043	0.05	
E	0.90	1.0	1.10	0.035	0.04	0.043	
F	0.50	0.6	0.70	0.020	0.024	0.028	
G	2.39	2.54	2.69	0.090	0.100	0.110	
н	1.40	1.75	2.05	0.055	0.069	0.080	

#### OPTIONAL

#### **Electrical Connections**

Pin	Connection		
1	Input		
2	Input Ground		
3	Ground		
4	Case Ground		
5	Output		
6	Output Ground		
7	Ground		
8	Case Ground		

#### Matching Circuit to $50\Omega$

