

[查询B25667A3247A375供应商](#)

[捷多邦, 专业PCB打样工厂](#)
[, 24小时加急出货](#)



Capacitors for Power Electronics

Series/Type: B25667A

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B25667A3247A375	B25667B3247A375	2004-09-10		

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



The information in our data book / sheet describes the type of component and shall not be considered as assured characteristics.

I_N 3x 18 A 22 A

$\tan\delta_0$ 0,2 W/kvar (dielectric)

Maximum ratings

U_{max} AC 440 V, 8 h daily
AC 520 V, 1 min
 $I_{r(40)}$ 3x 25 A ($\Theta_A = 40^\circ\text{C}$, U_N)
 I_s 5000 A
 $(du/dt)_{max}$ 14 V/ μs
 $(du/dt)_s$ 35 V/ μs

Test data

U_{TT} AC 900 V, 10 s
 U_{TC} AC 3000 V, 10 s

$\tan\delta$ (50 Hz) $\leq 0,6$ W/kvar (total)

Climatic category -40/D


Θ_{min} -40 °C
 Θ_{max} +55 °C
Humidity Max. relative
Humidity ≤ 95 %
 Θ_{stg} -55 bis +70 °C

Life expectancy

t_{LD} 100 000 h

Remarks

Natural cooling

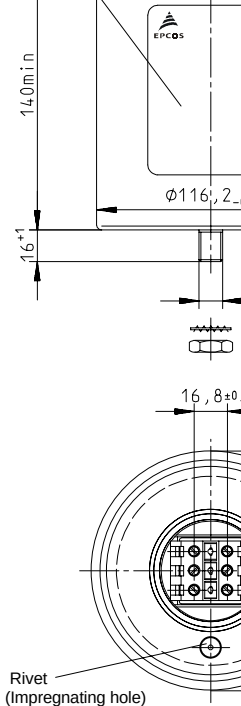

Design data

Dimensions $\varnothing \times l$
Approx. weight
Impregnation
Fixing
Mounting hole
Max. torque
Terminals
Max. torque
Terminal cross section
Creepage distance
Clearance
Overpressure disconnecto
Any mounting position pos