



RH1078M

Micropower, Dual, Single Supply
Precision Op Amp

DESCRIPTION


The RH1078M is a micropower dual op amp in the standard 8-pin configuration. This device is optimized for single supply operation at 5V. Specifications for $\pm 15V$ are also provided.

The wafer lots are processed to LTC's in-house Class S flow to yield circuits usable in stringent military applications.


ABSOLUTE MAXIMUM RATINGS

| | |
|--|------------------------------------|
| Supply Voltage | $\pm 22V$ |
| Differential Input Voltage | $\pm 30V$ |
| Input Voltage | Equal to Positive Supply Voltage |
| | 0.5V Below Negative Supply Voltage |
| Output Short-Circuit Duration | Indefinite |
| Operating Temperature Range | $-55^{\circ}C$ to $125^{\circ}C$ |
| Storage Temperature Range | $-55^{\circ}C$ to $150^{\circ}C$ |
| Lead Temperature (Soldering, 10 sec) | $300^{\circ}C$ |


BURN-IN CIRCUIT



PACKAGE/ORDER INFORMATION

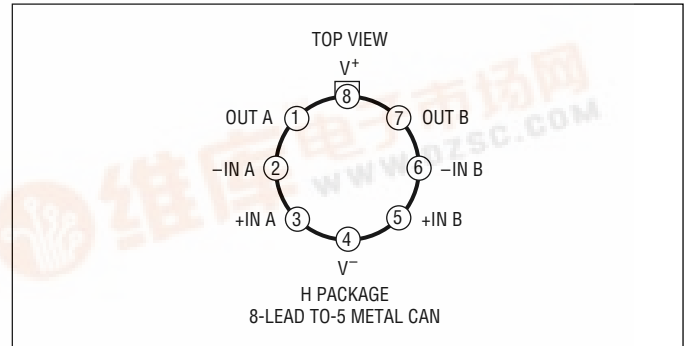

TOTAL DOSE BIAS CIRCUIT



Note: For ordering information contact LTC.



RH1078M

TABLE 1: ELECTRICAL CHARACTERISTICS (Preirradiation)

$V_S = 5V$, $V_{CM} = 0.1V$, $V_{OUT} = 1.4V$ unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | NOTES | $T_A = 25^\circ C$ | | | SUB-GROUP | $-55^\circ C \leq T_A \leq 125^\circ C$ | | | SUB-GROUP | UNITS | |
|-------------------------------------|----------------------------------|------------------------------------|--------|--------------------|---------------|-----|-----------|---|-----|-----|--------------|----------------------------------|------|
| | | | | MIN | TYP | MAX | | MIN | TYP | MAX | | | |
| V_{OS} | Input Offset Voltage | | | | | 120 | 4 | | | 370 | 2, 3 | μV | |
| $\frac{\Delta V_{OS}}{\Delta Temp}$ | Average Tempco of Offset Voltage | | | | | | | | 0.5 | | | $\mu V/^\circ C$ | |
| $\frac{\Delta V_{OS}}{\Delta Time}$ | Long Term V_{OS} Stability | | | | | 0.5 | | | | | | $\mu V/$ Month | |
| I_{OS} | Input Offset Current | | | | | 0.8 | 1 | | | 1.5 | 2, 3 | nA | |
| I_B | Input Bias Current | | | | | 15 | 1 | | | 18 | 2, 3 | nA | |
| e_n | Input Noise Voltage | 0.1Hz to 10Hz | 1 | | 0.5 | | | | | | | $\mu VP-P$ | |
| | Input Noise Voltage Density | $f_0 = 10Hz$ $f_0 = 1kHz$ | 1 1 | | 25 24 | | | | | | | nV/\sqrt{Hz} nV/\sqrt{Hz} | |
| i_n | Input Noise Current | 0.1Hz to 10Hz | 1 | | 2.6 | | | | | | | pAP-P | |
| | Input Noise Current Density | $f_0 = 10Hz$ $f_0 = 1kHz$ | 1 1 | | 0.07 0.025 | | | | | | | pA/\sqrt{Hz} pA/\sqrt{Hz} | |
| R_{IN} | Input Resistance Differential | | 2 | | 600 | | | | | | | M Ω | |
| | Common Mode | | 2 | | 5 | | | | | | | G Ω | |
| | Input Voltage Range | | 2 2 | 3.5 0 | | | 1 1 | 3.20 0.05 | | | 2, 3 2, 3 | V V | |
| CMRR | Common-Mode Rejection Ratio | $V_{CM} = 0V$ to 3.5V | | | 94 | | 1 | | | | | dB | |
| | | $V_{CM} = 0.05V$ to 3.2V | | | | | | 88 | | | 2, 3 | dB | |
| PSRR | Power Supply Rejection Ratio | $V_S = 2.3V$ to 12V | | | 100 | | 1 | | | | | dB | |
| | | $V_S = 3.1V$ to 12V | | | | | | 94 | | | 2, 3 | dB | |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = 0.03V$ to 4V, No Load | | | 150 | | 1 | | | | | V/mV | |
| | | $V_O = 0.03V$ to 3.5V, $R_L = 50k$ | | | 120 | | 1 | | | | | V/mV | |
| | | $V_O = 0.05V$ to 4V, No Load | | | | | | | 80 | | | 2, 3 | V/mV |
| | | $V_O = 0.05V$ to 3.5V, $R_L = 50k$ | | | | | | | 60 | | | 2, 3 | V/mV |
| V_{OUT} | Output Voltage Swing | Output Low, No Load | | | | 6 | 4 | | | 8 | 5, 6 | mV | |
| | | Output Low, 2k to GND | | | | 2 | 4 | | | | | mV | |
| | | Output Low, $I_{SINK} = 100\mu A$ | | | | | 130 | 4 | | 170 | 5, 6 | mV | |
| | | Output High, No Load | | | 4.2 | | | 4 | 3.9 | | | 5, 6 | V |
| | | Output High, 2k to GND | | | 3.5 | | | 4 | 3.0 | | | 5, 6 | V |
| SR | Slew Rate | $A_V = 1$, $V_S = \pm 2.5V$ | | | 0.04 | | 4 | | | | | V/ μs | |
| GBW | Gain-Bandwidth Product | $f_0 \leq 20kHz$ | | | 200 | | | | | | | kHz | |
| I_S | Supply Current | per Amplifier | | | | 75 | 1 | | | 95 | 2, 3 | μA | |
| | Channel Separation | $\Delta V_{IN} = 3V$, $R_L = 10k$ | | | | 130 | | | | | | dB | |
| | Minimum Supply Voltage | | 3 | | | 2.3 | | | | | | V | |

TABLE 1: ELECTRICAL CHARACTERISTICS (Preirradiation) $V_S = \pm 15V$ unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | NOTES | $T_A = 25^\circ C$ | | | SUB-GROUP | $-55^\circ C \leq T_A \leq 125^\circ C$ | | | SUB-GROUP | UNITS |
|-------------------------------------|----------------------------------|--|-------|--------------------|-----|-----|-----------|---|-----|-----|-----------|------------------|
| | | | | MIN | TYP | MAX | | MIN | TYP | MAX | | |
| V_{OS} | Input Offset Voltage | | | | | 350 | 4 | | | 600 | 2, 3 | μV |
| $\frac{\Delta V_{OS}}{\Delta Temp}$ | Average Tempco of Offset Voltage | | | | | | | | 0.6 | | | $\mu V/^\circ C$ |
| I_{OS} | Input Offset Current | | | | | 0.8 | 1 | | | 1.5 | 2, 3 | nA |
| I_B | Input Bias Current | | | | | 15 | | | | 18 | 2, 3 | nA |
| | Input Voltage Range | | | 13.5 -15.0 | | | 1 1 | | | | | V V |
| CMRR | Common-Mode Rejection Ratio | $V_{CM} = 13.5V, -15V$ $V_{CM} = 13V, -14.9V$ | | 97 | | | 1 | | 90 | | 2, 3 | dB dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 5V, 0V$ to $\pm 18V$ | | 100 | | | 1 | | 94 | | 2, 3 | dB |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = \pm 10V, R_L = 50k$ $V_O = \pm 10V, R_L = 2k$ $V_O = \pm 10V, R_L = 5k$ | | 1000 | | | 1 | | | | | V/mV |
| | | | | 300 | | | 1 | | | | | V/mV |
| | | | | | | | | 150 | | | 2, 3 | V/mV |
| V_{OUT} | Output Voltage Swing | $R_L = 50k$ $R_L = 2k$ $R_L = 5k$ | | ± 13 | | | 4 | | | | | V |
| | | | | ± 11 | | | 4 | | | | | V |
| | | | | | | | | ± 11 | | | 5, 6 | V |
| SR | Slew Rate | | | 0.06 | | | 4 | | | | | V/ μs |
| I_S | Supply Current | Per Amplifier | | | | 100 | 1 | | | 125 | 2, 3 | μA |

Note 1: All noise parameters are for $V_S = \pm 2.5V$, $V_O = 0V$.**Note 2:** This parameter is guaranteed by design, characterization or correlation to other tested parameters.**Note 3:** Power supply rejection ratio is measured at the minimum supply voltage. The op amps actually work at 1.8V supply but with a typical offset skew of $-300\mu V$.

RH1078M

TABLE 1A: ELECTRICAL CHARACTERISTICS (Postirradiation)

$V_S = 5V$, $0V$, $V_{CM} = 0.1V$, $V_O = 1.4V$, $T_A = 25^\circ C$ unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | 10KRAD(Si) | | 25KRAD(Si) | | 50KRAD(Si) | | 75KRAD(Si) | | 100KRAD(Si) | | UNITS |
|-----------|------------------------------|--|------------|-----|------------|-----|------------|-----|------------|-----|-------------|-----|--------------|
| | | | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | |
| V_{OS} | Input Offset Voltage | | | 120 | | 175 | | 250 | | 500 | | | μV |
| I_{OS} | Input Offset Current | | | 2 | | 8 | | 13 | | 18 | | | nA |
| I_B | Input Bias Current | | | 20 | | 40 | | 80 | | 100 | | | nA |
| | Input Voltage Range | | 3.5 | | 3.5 | | 3.5 | | 3.5 | | | | V |
| CMRR | Common-Mode Rejection Ratio | $V_{CM} = 0V$ to $3.5V$ | 91 | | 89 | | 87 | | 85 | | | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 2.3V$ to $12V$ | 100 | | 100 | | 98 | | 88 | | | | dB |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = 0.03V$ to $4V$, No Load $V_O = 0.03V$ to $3.5V$, $R_L = 50k$ | 150 120 | | 150 50 | | 100 20 | | 50 10 | | | | V/mV V/mV |
| V_{OUT} | Output Voltage Swing | Output Low, No Load | | 6 | | 9 | | 13 | | 20 | | | mV |
| | | Output Low, 2k to GND | | 2 | | 2 | | 2 | | 2 | | | mV |
| | | Output Low, $I_{SINK} = 100\mu A$ | | 130 | | 140 | | 150 | | 160 | | | mV |
| | | Output High, No Load | 4.2 | | 4.2 | | 4.2 | | 4.2 | | 4.2 | | V |
| | | Output High, 2k to GND | 3.5 | | 3.5 | | 3.5 | | 3.5 | | 3.5 | | V |
| S_R | Slew Rate | $A_V = 1$, $V_S = \pm 2.5V$ | 0.04 | | 0.03 | | 0.02 | | 0.01 | | | | V/ μs |
| I_S | Supply Current | per Amplifier | | 75 | | 75 | | 75 | | 75 | | | μA |

TABLE 1A: ELECTRICAL CHARACTERISTICS (Postirradiation) $V_S = \pm 15V$ unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | 10KRAD(Si) | | 25KRAD(Si) | | 50KRAD(Si) | | 75KRAD(Si) | | 100KRAD(Si) | | UNITS |
|-----------|------------------------------|---|------------|-----|------------|-----|------------|-----|------------|-----|-------------|------|------------|
| | | | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | |
| V_{OS} | Input Offset Voltage | | | 350 | | 500 | | 650 | | 800 | | 1000 | μV |
| I_{OS} | Input Offset Current | | | 2 | | 8 | | 13 | | 18 | | 23 | nA |
| I_B | Input Bias Current | | | 20 | | 40 | | 80 | | 100 | | 120 | nA |
| | Input Voltage Range | | 13.5 | | 13.5 | | 13.5 | | 13.5 | | 13.5 | | V |
| | | | -15.0 | | -15.0 | | -15.0 | | -15.0 | | -15.0 | | V |
| CMRR | Common-Mode Rejection Ratio | $V_{CM} = 13.5V, -15V$ | | 94 | | 92 | | 90 | | 88 | | 86 | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 5V, 0V$ to $\pm 18V$ | | 100 | | 100 | | 98 | | 88 | | 78 | dB |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = 10V, R_L = 50k$ $V_O = 10V, R_L = 2k$ | 1000 | | 700 | | 400 | | 150 | | 50 | | V/mV |
| | | | 300 | | 200 | | 120 | | 45 | | 15 | | V/mV |
| V_{OUT} | Output Voltage Swing | $R_L = 50k$ $R_L = 2k$ | ± 13 | | ± 13 | | ± 13 | | ± 13 | | ± 13 | | V |
| | | | ± 11 | | ± 11 | | ± 11 | | ± 11 | | ± 10 | | V |
| SR | Slew Rate | | 0.05 | | 0.04 | | 0.03 | | 0.02 | | 0.01 | | V/ μs |
| I_S | Supply Current | per Amplifier | | 100 | | 100 | | 100 | | 100 | | 100 | μA |

TABLE 2: ELECTRICAL TEST REQUIREMENTS

| MIL-STD-883 TEST REQUIREMENTS | SUBGROUP |
|---|--------------|
| Final Electrical Test Requirements (Method 5004) | 1*,2,3,4,5,6 |
| Group A Test Requirements (Method 5005) | 1,2,3,4,5,6 |
| Group C and D End Point Electrical Parameters (Method 5005) | 1,2,3 |





* PDA Applies to subgroup 1. See PDA Test Notes.

PDA Test Notes

The PDA is specified as 5% based on failures from group A, subgroup 1, tests after cooldown as the final electrical test in accordance with method 5004 of MIL-STD-883 Class B. The verified failures of group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent for the lot.


Linear Technology Corporation reserves the right to test to tighter limits than those given.

TYPICAL APPLICATIONS

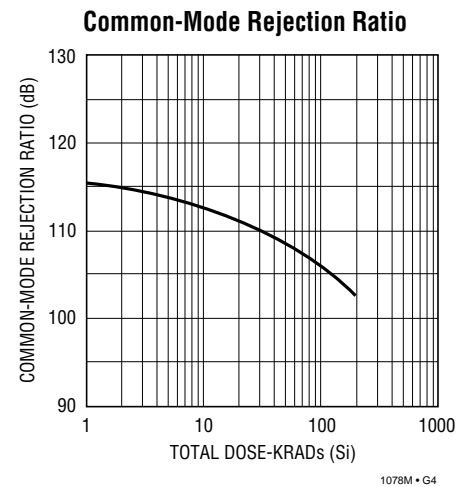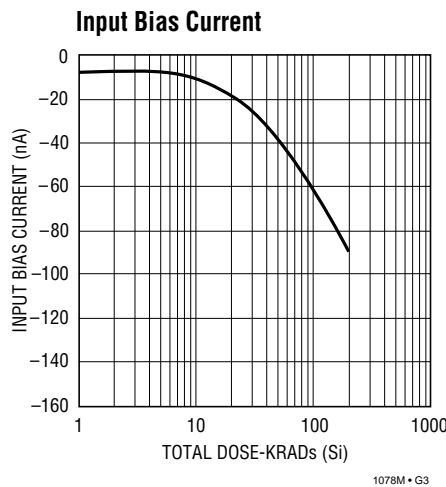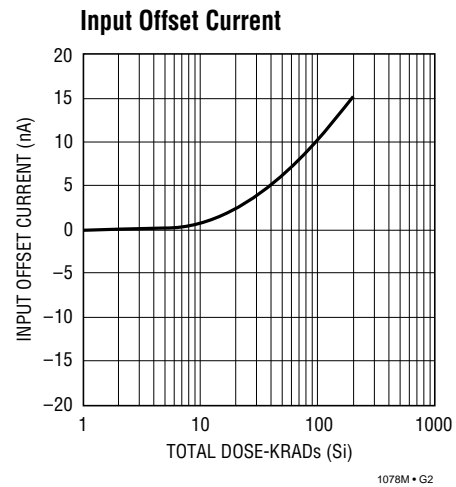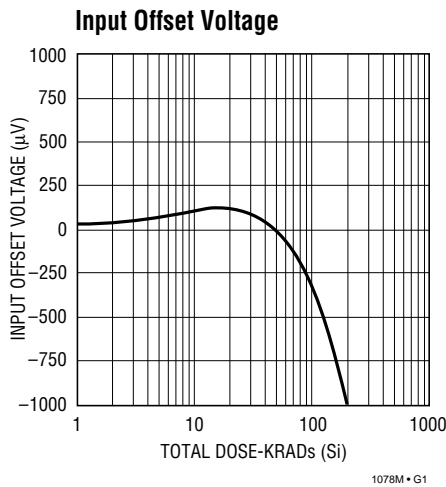


TYPICAL APPLICATIONS


Power Supply Rejection Ratio

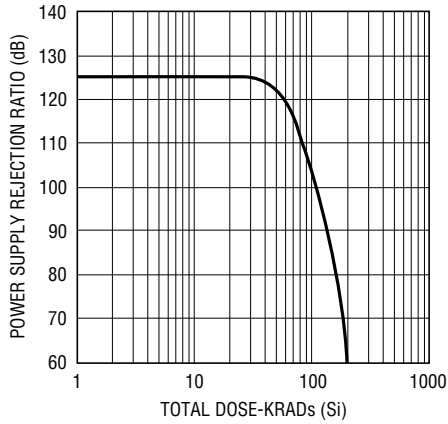


Large-Signal Voltage Gain

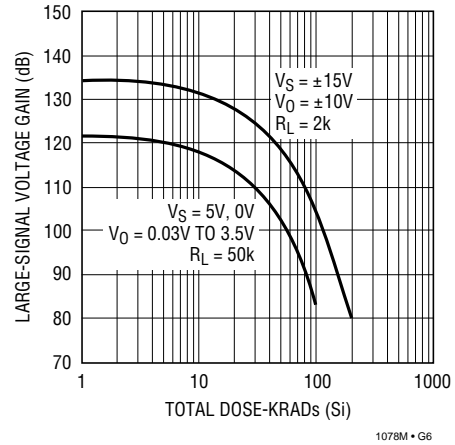


Slew Rate

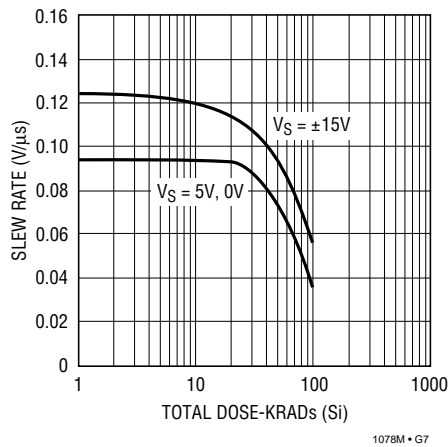


Gain-Bandwidth Product

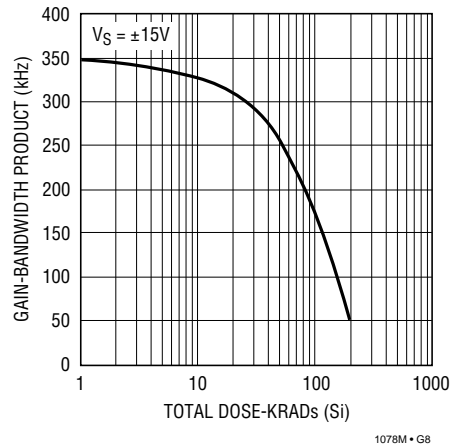

10Hz Noise Density

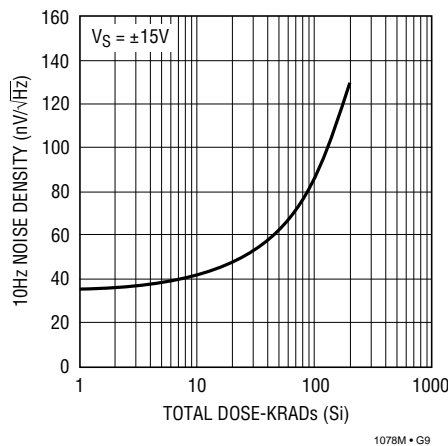


Positive Output Voltage Swing

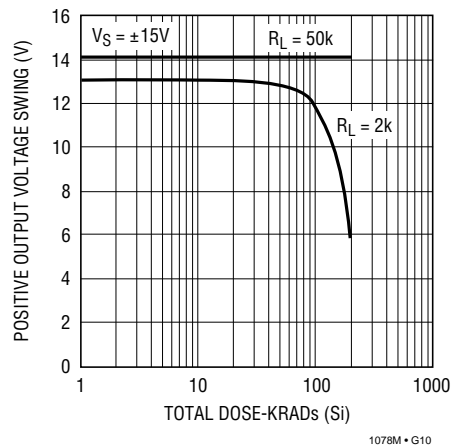


TYPICAL APPLICATIONS

Negative Output Voltage Swing

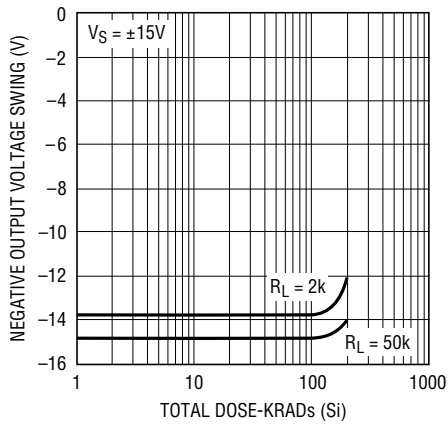


1078M • G11

Output Voltage Swing Low, No Load

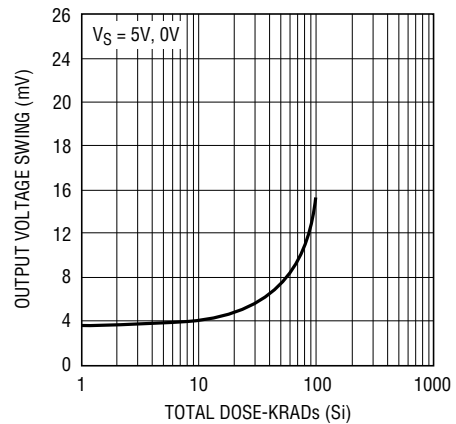


1078M • G12

Output Voltage Swing Low, 2k to GND

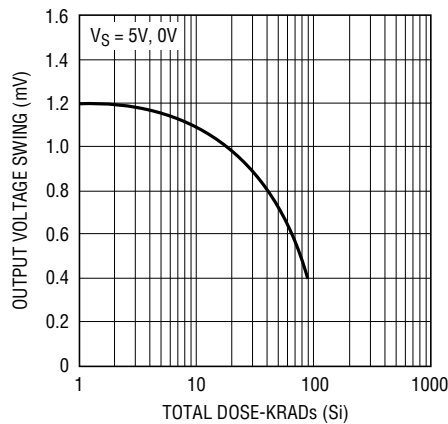


1078M • G13

Output Voltage Swing Low, ISINK = 100mA

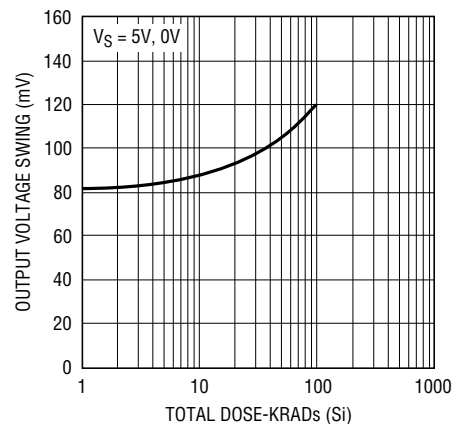


1078M • G14

Output Voltage Swing High

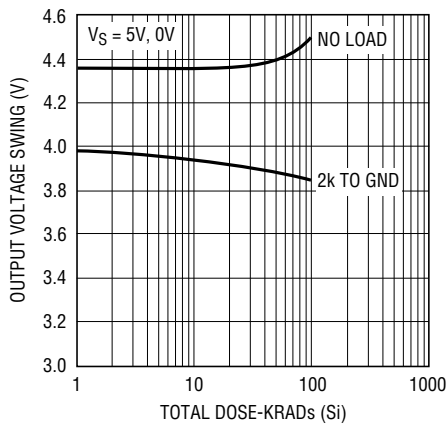

1078M • G15

Supply Current

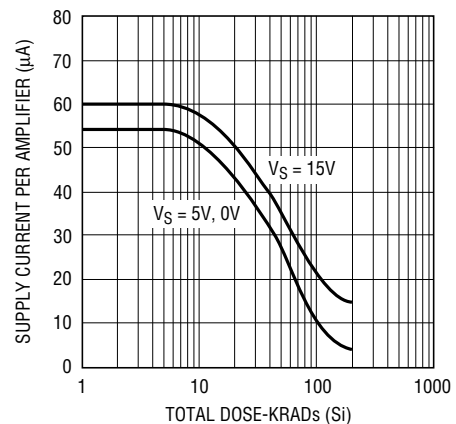

1078M • G16