



SAW Components

Data Sheet B3830

Data Sheet

EPCOS



SAW Components

B3830

Low-Loss Filter

395,0 MHz

Data Sheet


Ceramic package QCC8B

Features

- Low-loss filter (RX) for Trunked Radio
- Usable bandwidth 10 MHz
- No matching required for operation at 50 Ω
- Unbalanced to unbalanced or unbalanced to balanced operation
- Package for Surface Mounted Technology (SMT)
- Hermetically sealed ceramic package

Terminals


- Gold-plated

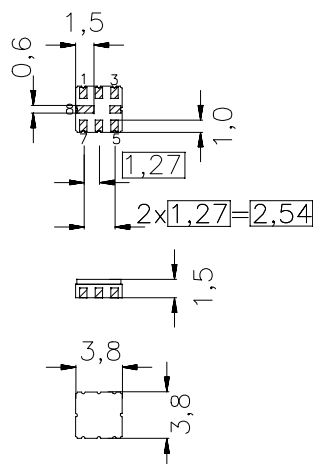

typ. Dimensions in mm, approx. weight 0,07 g

Pin configuration

5	Input
1	Output / Output balanced
2	Output ground / Output balanced
3, 6, 7	Ground
4, 8	Input ground / Case ground

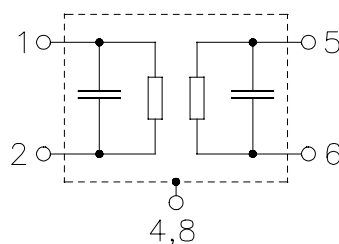

Type	Ordering code	Marking and Package according to	Packing according to
B3830	B39401-B3830-Z810	C61157-A7-A46	F61074-V8037-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-30 / +70	$^{\circ}\text{C}$	
Storage temperature range	T_{stg}	-40 / +85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Source power	P_s	15	dBm	passband



SAW Components	B3830
Low-Loss Filter	395,0 MHz

Data Sheet

Characteristics

Operating temperature range:	$T_A = +15 \dots +35 \text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50 \text{ } \Omega$ unbalanced or unbalanced to balanced
Terminating load impedance:	$Z_L = 50 \text{ } \Omega$ unbalanced or unbalanced to balanced

		min.	typ.	max.	
Nominal frequency	f_N	—	395,0	—	MHz
Maximum insertion attenuation 390,0 MHz ... 400,0 MHz	α_{\max}	—	1,8	3,5	dB
Amplitude ripple (p-p) 390,0 MHz ... 400,0 MHz	$\Delta\alpha$	—	0,7	1,5	dB
VSWR 390,0 MHz ... 400,0 MHz		—	1,65:1	2,0:1	
Absolute attenuation	α_{abs}				
0,1 MHz ... 350,0 MHz		40	60	—	dB
350,0 MHz ... 383,0 MHz		25	30	—	dB
383,0 MHz ... 385,0 MHz		18	20	—	dB
410,0 MHz ... 440,0 MHz		10	20	—	dB
440,0 MHz ... 563,0 MHz		44	50	—	dB
563,0 MHz ... 1100,0 MHz		30	35	—	dB
1100,0 MHz ... 1526,0 MHz		30	37	—	dB
1526,0 MHz ... 2200,0 MHz		30	37	—	dB
2200,0 MHz ... 2500,0 MHz		15	20	—	dB
2500,0 MHz ... 4000,0 MHz		5	7	—	dB
Symmetry in band					
$ S_{31} / S_{21} $ 390,0 ... 400,0 MHz		-1,0	0	1,0	dB
$\arg(S_{31}/S_{21})$ 390,0 ... 400,0 MHz		170	180	190	$^{\circ}$
Temperature coefficient of frequency	TC_f	—	-36	—	ppm/K



SAW Components	B3830
Low-Loss Filter	395,0 MHz

Data Sheet

Characteristics

Operating temperature range:	$T_A = -30 \dots +70 \text{ }^\circ\text{C}$
Terminating source impedance:	$Z_S = 50 \text{ } \Omega$ unbalanced or unbalanced to balanced
Terminating load impedance:	$Z_L = 50 \text{ } \Omega$ unbalanced or unbalanced to balanced

		min.	typ.	max.	
Nominal frequency	f_N	—	395,0	—	MHz
Maximum insertion attenuation 390,0 MHz ... 400,0 MHz	α_{\max}	—	1,9	4,0	dB
Amplitude ripple (p-p) 390,0 MHz ... 400,0 MHz	$\Delta\alpha$	—	0,8	2,0	dB
VSWR 390,0 MHz ... 400,0 MHz		—	1,65:1	2,0:1	
Absolute attenuation	α_{abs}				
0,1 MHz ... 350,0 MHz		40	60	—	dB
350,0 MHz ... 383,0 MHz		25	30	—	dB
383,0 MHz ... 385,0 MHz		18	20	—	dB
410,0 MHz ... 440,0 MHz		10	20	—	dB
440,0 MHz ... 563,0 MHz		44	50	—	dB
563,0 MHz ... 1100,0 MHz		30	35	—	dB
1100,0 MHz ... 1526,0 MHz		30	37	—	dB
1526,0 MHz ... 2200,0 MHz		30	37	—	dB
2200,0 MHz ... 2500,0 MHz		15	20	—	dB
2500,0 MHz ... 4000,0 MHz		5	7	—	dB
Symmetry in band					
$ S_{31} / S_{21} $ 390,0 ... 400,0 MHz		-1,0	0	1,0	dB
$\arg(S_{31}/S_{21})$ 390,0 ... 400,0 MHz		170	180	190	°
Temperature coefficient of frequency	TC_f	—	- 36	—	ppm/K



SAW Components


B3830

Low-Loss Filter


395,0 MHz

Data Sheet

Transfer function

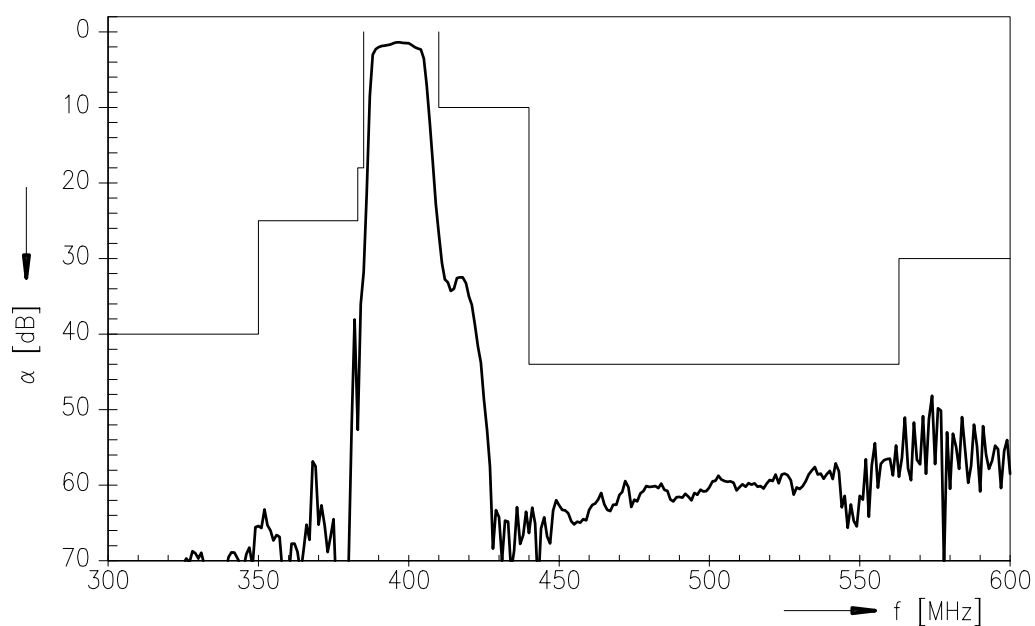

Normalized transfer function (pass band; +15 °C ... +35 °C)

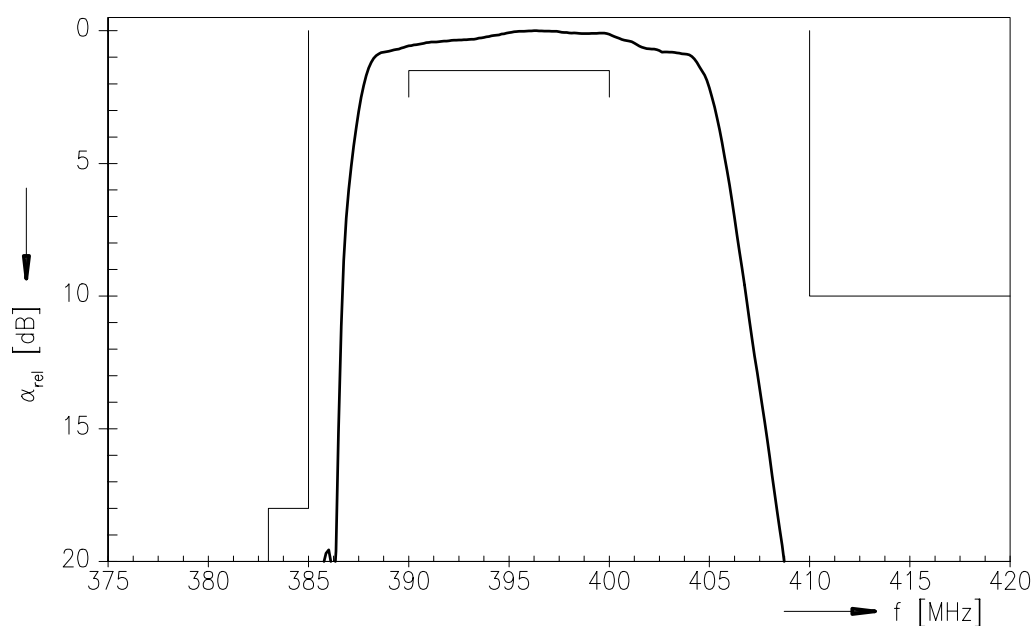



SAW Components


B3830

Low-Loss Filter


395,0 MHz

Data Sheet

Amplitude symmetry $|S_{31}|/|S_{21}|$

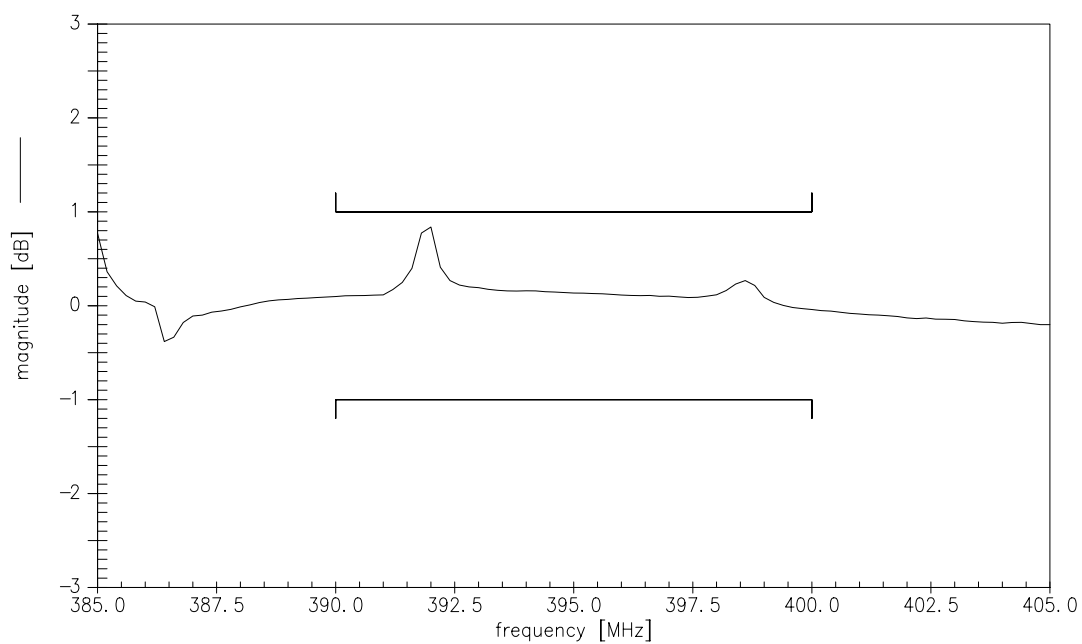

Phase symmetry $\arg(S_{31}/S_{21}) - 180^\circ$

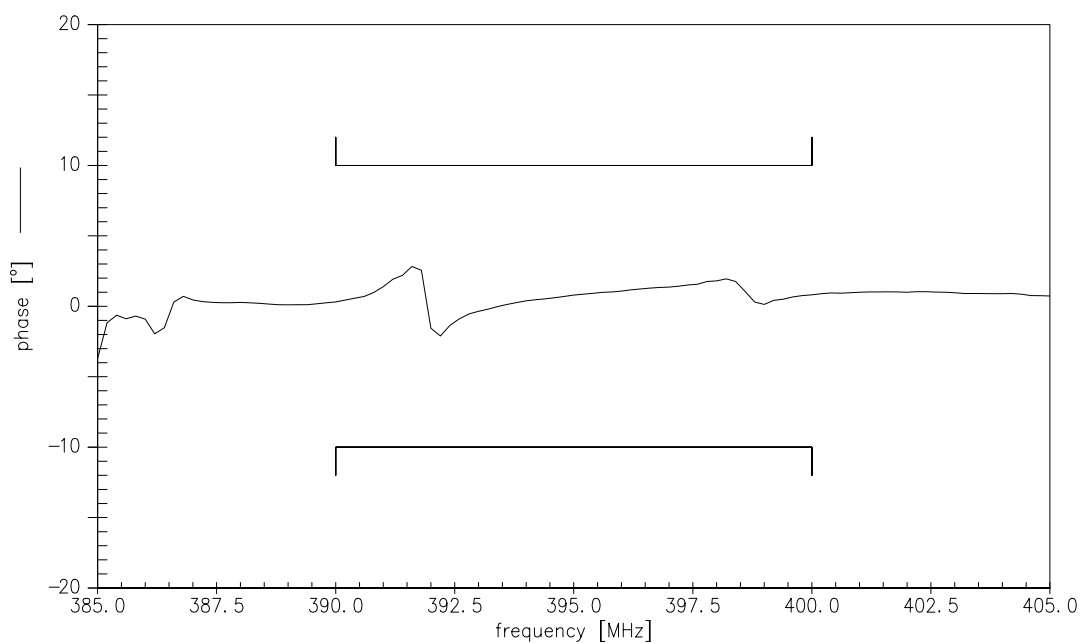



SAW Components	B3830
Low-Loss Filter	395,0 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.