

[查询SG-220供应商](#)

捷多邦，专业PCB打样工厂，24小时加急出货

## Photointerrupters(Transmissive)

KODENSHI

**SG - 220**

The SG - 220 photointerrupter high – performance standard type, combines high – output GaAs IRED with high sensitive phototransistor.

### FEATURES


- PWB direct mount type
- GAP : 3.0mm
- High resolution( slit 0.25mm )

### APPLICATIONS

- CD changers
- Printers
- Scanners
- Encoders

### DIMENSIONS

(Unit : mm)

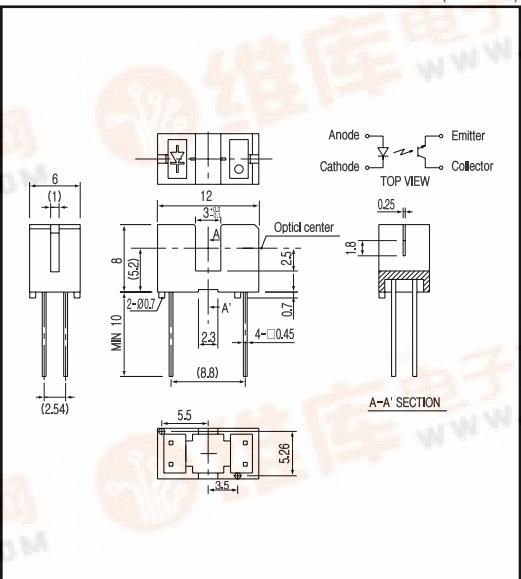

### MAXIMUM RATINGS

(Ta=25 °C)

	Item	Symbol	Rating	Unit
Input	Power dissipation	P <sub>d</sub>	100	mW
	Forward current	I <sub>f</sub>	60	mA
	Reverse voltage	V <sub>R</sub>	5	V
Output	Pulse forward current <sup>1)</sup>	I <sub>FP</sub>	1	A
	Collector power dissipation	P <sub>c</sub>	100	mW
	Collector current	I <sub>c</sub>	40	mA
	C - E voltage	V <sub>CEO</sub>	30	V
	E - C voltage	V <sub>ECO</sub>	5	V
	Operating temp. <sup>2)</sup>	Topr.	- 20 ~ +85	
	Storage temp. <sup>2)</sup>	Tstg.	- 40 ~ +100	
	Soldering temp. <sup>3)</sup>	Tsol.	260	

\*1. pulse width : t w 100 sec.period : T = 10msec.

\*2. No icebound or dew      \*3. For MAX.5 seconds at the position of 1mm from the package

### ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 °C)

	Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	V <sub>f</sub>	I <sub>f</sub> =20mA		1.2	1.4	V
	Reverse current	I <sub>R</sub>	V <sub>R</sub> =5V			10	µA
	Peak wavelength	p	I <sub>f</sub> =20mA	940			nm
Output	Collector dark current	I <sub>CEO</sub>	V <sub>CE</sub> =10V		1	100	nA
	Light current	I <sub>e</sub>	I <sub>f</sub> =20mA, V <sub>e</sub> =5V, (Nonshading)	0.1		2.5	mA
	Transmission leakage current	I <sub>CEOD</sub>	I <sub>f</sub> =20mA, V <sub>e</sub> =5V, (shading)		0.2	2	µA
	C - E saturation voltage	V <sub>CE(sat)</sub>	I <sub>f</sub> =30mA, I <sub>e</sub> =0.05mA		0.15	0.4	V
	Rise time	tr	V <sub>CC</sub> =2V, I <sub>e</sub> =0.5mA, R=1k		25		µsec.
	Fall time	tf			30		µsec.


## Photo interrupters(Transmissive)

SG - 220


**Collector power dissipation Vs.  
Ambient temperature**

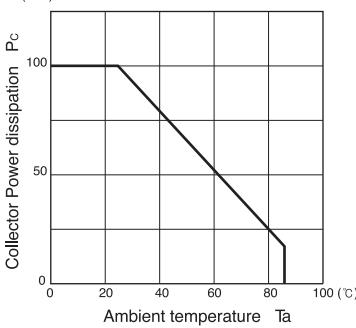


**Forward current Vs.  
Forward voltage**

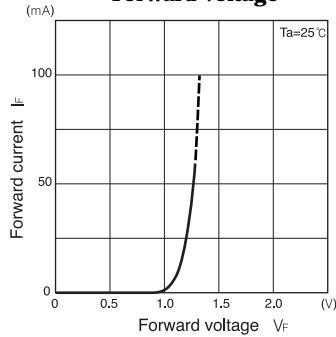


**Light current Vs.  
Forward current**

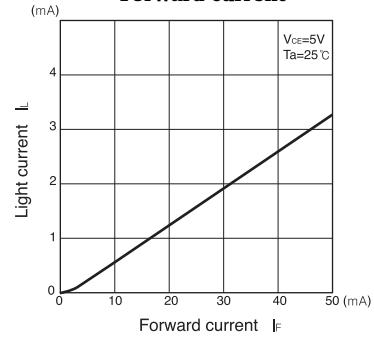


**Light current Vs.  
Collector-Emitter voltage**

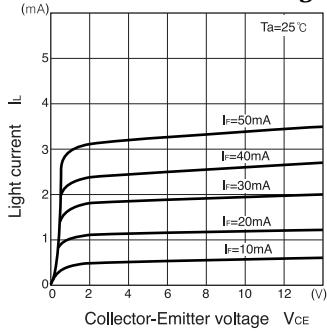


**Relative light current Vs.  
Ambient temperature**

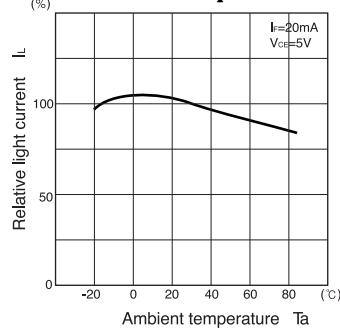


**Dark current Vs.  
Ambient temperature**

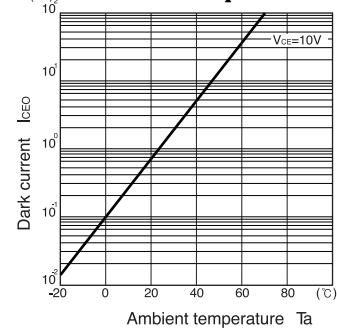


**Switching time Vs.  
Load resistance**

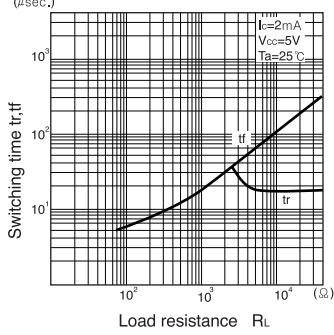

**Relative light current Vs.  
Moving distance**

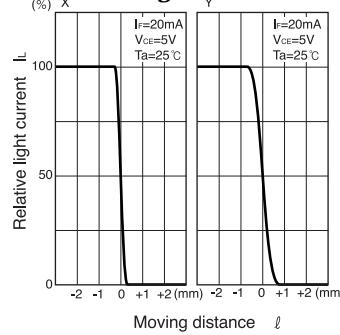

Switching time measurement circuit

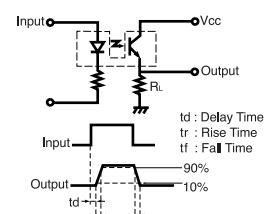

Method of measuring position detection characteristic

