

Photointerrupters(Transmissive)

KODENSHI

SG - 255

The SG-255 photointerrupter high-performance standard type, combines high-output GaAs IRED with high sensitive phototransistor.

FEATURES


- PWB direct mount type
- GAP : 3.2mm
- Double-sided screw-mount

APPLICATIONS

- Printers
- Facsimiles
- Auto stampers
- Ticket vending machines

DIMENSIONS

(Unit : mm)

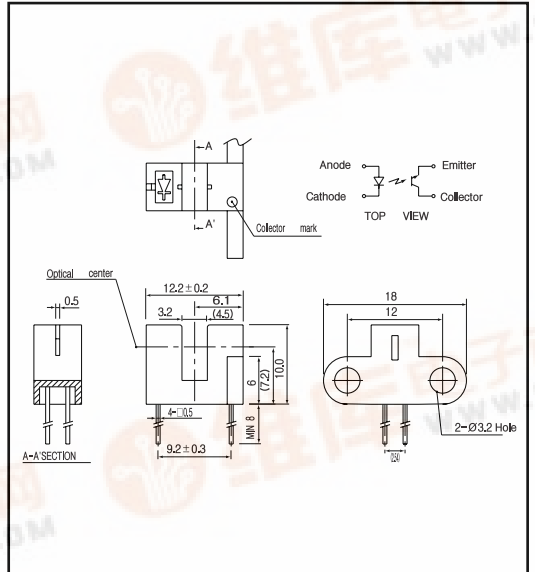

MAXIMUM RATINGS

(Ta=25 )

Item	Symbol	Rating	Unit	
Input	Power dissipation	P <sub>b</sub>	100	mW
	Forward current	I <sub>F</sub>	60	mA
	Reverse voltage	V <sub>R</sub>	5	V
	Pulse forward current <sup>*1</sup>	I <sub>FP</sub>	1	A
Output	Collector power dissipation	P <sub>c</sub>	100	mW
	Collector current	I <sub>c</sub>	40	mA
	C - E voltage	V <sub>CEO</sub>	30	V
	E - C voltage	V <sub>ECO</sub>	5	V
Operating temp. <sup>*2</sup>		T <sub>opr.</sub>	- 20 ~ +85	
Storage temp. <sup>*2</sup>		T <sub>stg.</sub>	- 30 ~ +85	
Soldering temp. <sup>*3</sup>		T <sub>sol.</sub>	260	


\*1. pulse width : t<sub>w</sub> 100 μsec, period ; T=10msec.

\*2. No icebound or dew \*3. For MAX.5 seconds at the position of 1mm from the package

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 )


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Input	Forward voltage	V <sub>F</sub> I <sub>F</sub> =20mA		1.2	1.4	V
	Reverse current	I <sub>R</sub> V <sub>R</sub> =5V			10	μA
	Peak wavelength	λ I <sub>F</sub> =20mA		940		nm
Output	Collector dark current	I <sub>CEO</sub> V <sub>CE</sub> =10V		1	100	nA
	Light current	I <sub>L</sub> I <sub>F</sub> =20mA, V <sub>E</sub> =5V, Non-shading	0.5		10	mA
	Leakage current	I <sub>CEOD</sub> I <sub>F</sub> =20mA, V <sub>E</sub> =5V(shading)		0.5	10	μA
	C - E saturation voltage	V <sub>CE(sat)</sub> I <sub>F</sub> =20mA, I <sub>c</sub> =0.2mA		0.15	0.4	V
	Rise time	t <sub>r</sub> V <sub>CC</sub> =5V, I <sub>c</sub> =2mA, R=100		4	20	μsec.
	Fall time	t <sub>f</sub> V <sub>CC</sub> =5V, I <sub>c</sub> =2mA, R=100		5	25	μsec.




# Photointerrupters(Transmissive)

## SG - 255


**Collector power dissipation Vs. Ambient temperature**

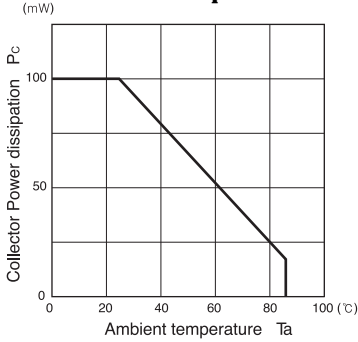


**Forward current Vs. Forward voltage**




**Light current Vs. Forward current**

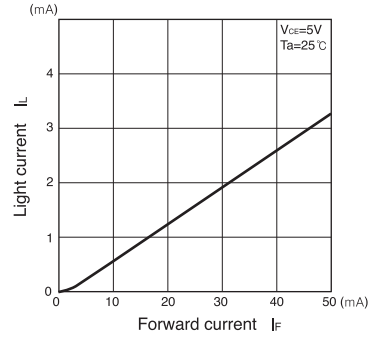


**Light current Vs. Collector-Emitter voltage**




**Relative light current Vs. Ambient temperature**




**Dark current Vs. Ambient temperature**




**Switching time Vs. Load resistance**



**Relative light current Vs. Moving distance**



Switching time measurement circuit



Method of measuring position detection characteristic

