



Features

- DC to 4 GHz
- Flanged model
- Low VSWR

Applications

- High power RF transmission

CHF5225CAF Series 20 W Power RF Flanged Chip Termination


General Specifications

Substrate.....Alumina
Resistive Film.....Thick Film
Tab.....Ag
Protection.....Epoxy
Tab Attachment
.....Brazed with Epoxy Encapsulation
Mounting Flange.....Cu plated with Ni
Resistance.....50 Ω
Tolerance..... $\pm 5\%$
Packaging.....100 pcs./tray

Absolute Ratings


Power.....20 W
Frequency.....4.0 GHz
VSWR.....1.2 Maximum

Characteristic Curve

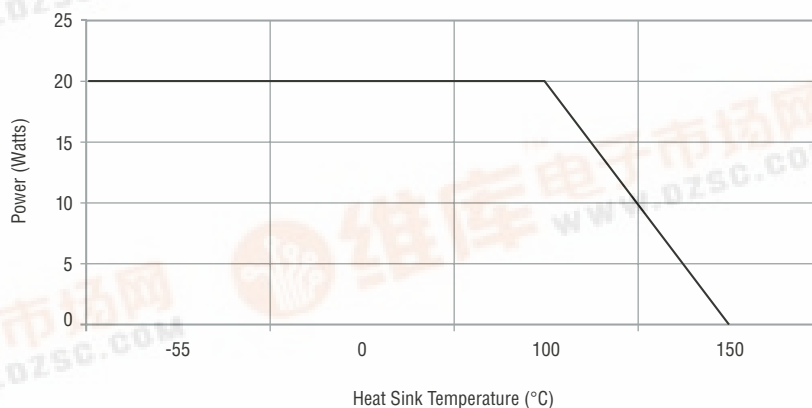


Product Dimensions

Version C

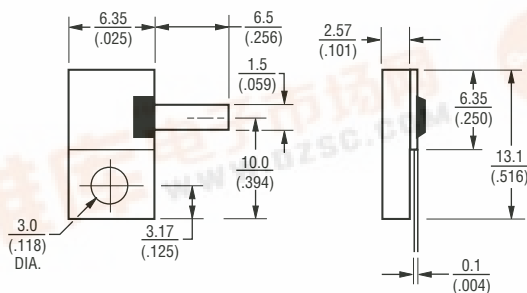

Version D



DIMENSIONS = $\frac{\text{MILLIMETERS}}{(\text{INCHES})}$

How To Order

CHF 5225 C A F 500 L

Model _____
Size _____
Version _____
Substrate _____
Mount _____
F = Flange
Value _____
500 = 50 Ohm
Function _____
L = Termination



Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117

Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555

Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500

Fax: +1-951 781-5700

www.bourns.com

