

[查询CHF5225CNF供应商](#)

[捷多邦, 专业PCB打样工厂, 24小时加急出货](#)



### Features

- DC to 4 GHz
- Flanged model
- Low VSWR

### Applications

- High power RF transmission

## CHF5225CNF Series 60 W Power RF Flanged Chip Termination


### General Specifications

Substrate.....ALN  
 Resistive Film.....Thick Film  
 Tab .....Ag  
 Protection.....Epoxy  
 Tab Attachment  
 .....Braze with Epoxy Encapsulation  
 Mounting Flange .....Cu plated with Ni  
 Resistance.....50 Ω  
 Tolerance .....±5 %  
 Packaging .....100 pcs./tray

### Absolute Ratings


Power.....60 W  
 Frequency .....4.0 GHz  
 VSWR.....1.2 Maximum

### Characteristic Curve

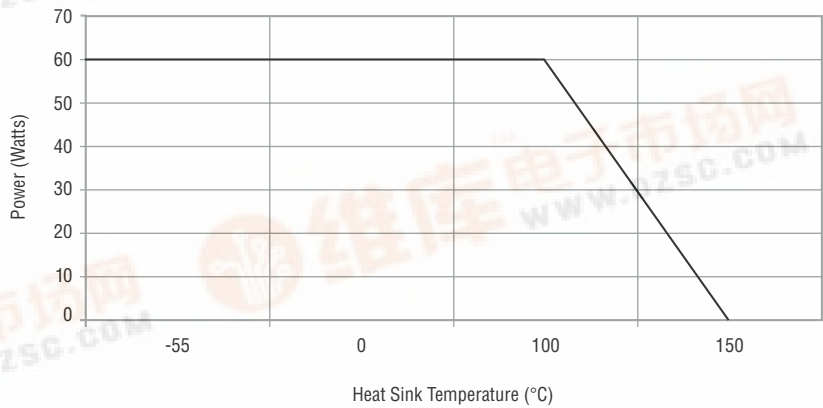


### Product Dimensions

#### Version C

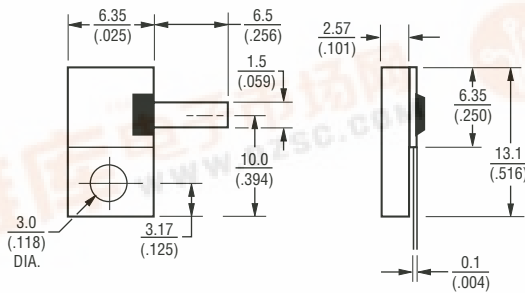

#### Version D



DIMENSIONS = MILLIMETERS (INCHES)

### How To Order

CHF 5225 C N F 500 L

Model \_\_\_\_\_  
 Size \_\_\_\_\_  
 Version \_\_\_\_\_  
 Substrate \_\_\_\_\_  
 Mount \_\_\_\_\_  
 F = Flange  
 Value \_\_\_\_\_  
 500 = 50 Ohm  
 Function \_\_\_\_\_  
 L = Termination



Reliable Electronic Solutions

**Asia-Pacific:**  
 Tel: +886-2 2562-4117  
 Fax: +886-2 2562-4116

**Europe:**  
 Tel: +41-41 768 5555  
 Fax: +41-41 768 5510

**The Americas:**  
 Tel: +1-951 781-5500  
 Fax: +1-951 781-5700  
[www.bourns.com](http://www.bourns.com)

