



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

TO-251/TO-252-2L Plastic-Encapsulate Transistors

CJ7805 Three-terminal positive voltage regulator

FEATURES

Maximum Output current

I_{OM} : 1.5 A

Output voltage


V_o : 5V

TO-251
TO-252-2


1.IN

2.GND

3.OUT



1 2 3



1 2 3


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Operating Junction Temperature Range	T_{OPR}	0-+125	°C
Storage Temperature Range	T_{STG}	-55-+150	°C

ELECTRICAL CHARACTERISTICS ($V_i=10V, I_o=500mA, 0^\circ C < T_j < 125^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_j=25^\circ C$	4.8	5.0	5.2	V
		$7V \leq V_i \leq 20V, I_o=5mA-1A$ $P_o < 15W$	4.75	5.00	5.25	V
Load Regulation	ΔV_o	$T_j=25^\circ C, I_o=5mA-1.5A$		9	100	mV
		$T_j=25^\circ C, I_o=250mA-750mA$		4	50	mV
Line regulation	ΔV_o	$7V \leq V_i \leq 25V, T_j=25^\circ C$		4	100	mV
		$8V \leq V_i \leq 12V, T_j=25^\circ C$		1.6	50	mV
Quiescent Current	I_q	$T_j=25^\circ C$		5	8	mA
Quiescent Current Change	ΔI_q	$7V \leq V_i \leq 25V$		0.3	1.3	mA
	ΔI_q	$5mA \leq I_o \leq 1A$		0.03	0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		42		μV
Ripple Rejection	RR	$8V \leq V_i \leq 18V, f=120Hz, T_j=25^\circ C$	62	73		dB
Dropout Voltage	V_d	$T_j=25^\circ C, I_o=1A$		2		V
Short Circuit Current	I_{sc}	$V_i=35V, T_a=25^\circ C$		230		mA
Peak Current	I_{pk}	$T_j=25^\circ C$		2.2		A

TYPICAL APPLICATION

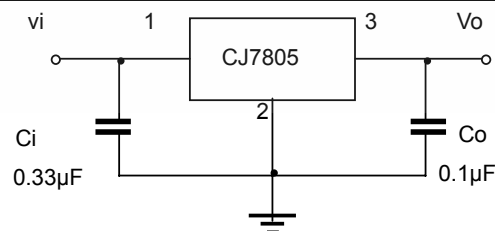

Typical Performance Characteristics

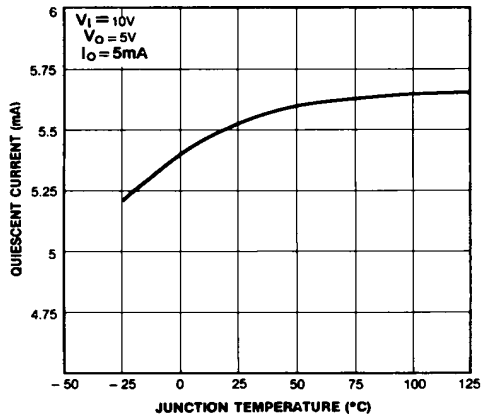


Figure 1. Quiescent Current

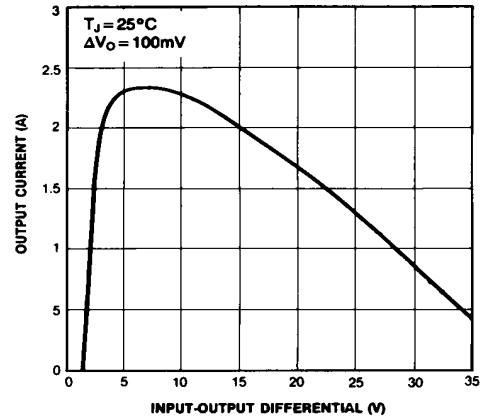


Figure 2. Peak Output Current

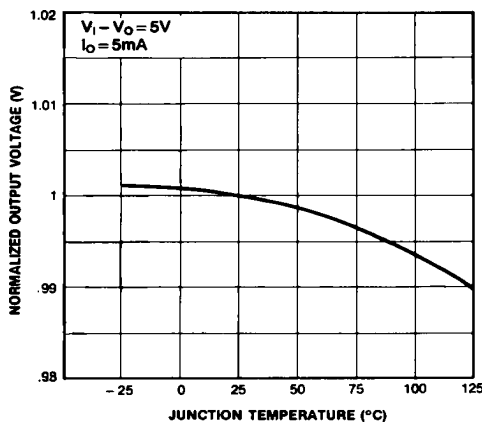


Figure 3. Output Voltage

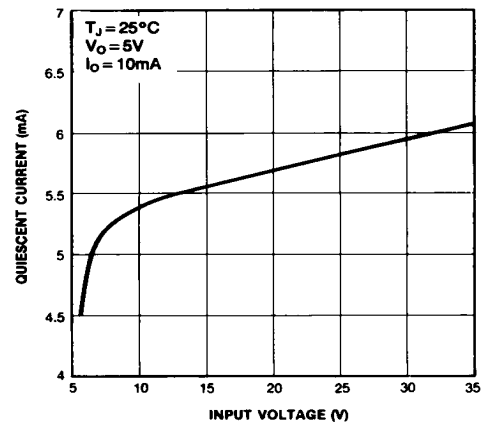



Figure 4. Quiescent Current



江苏长电科技股份有限公司
JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD.

275 Binjiang Rd., Jiangyin, Jiangsu, China

TO-251 PACKAGE OUTLINE DIMENSIONS

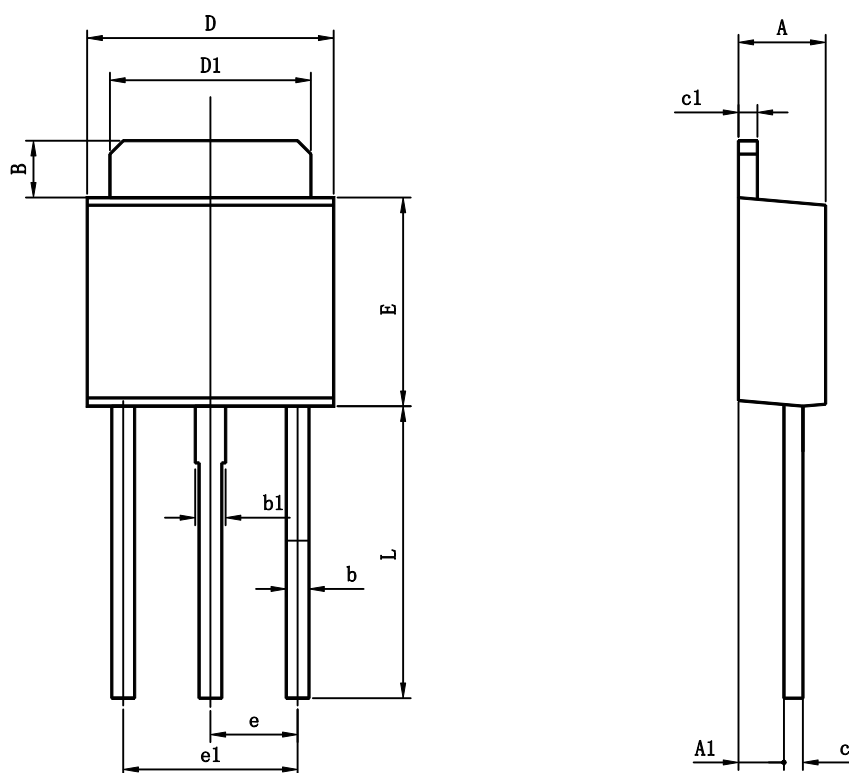


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	1.020	1.270	0.040	0.050
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L	7.500	7.900	0.295	0.311

May 2002,Rev.A



TO-252-2L PACKAGE OUTLINE DIMENSIONS

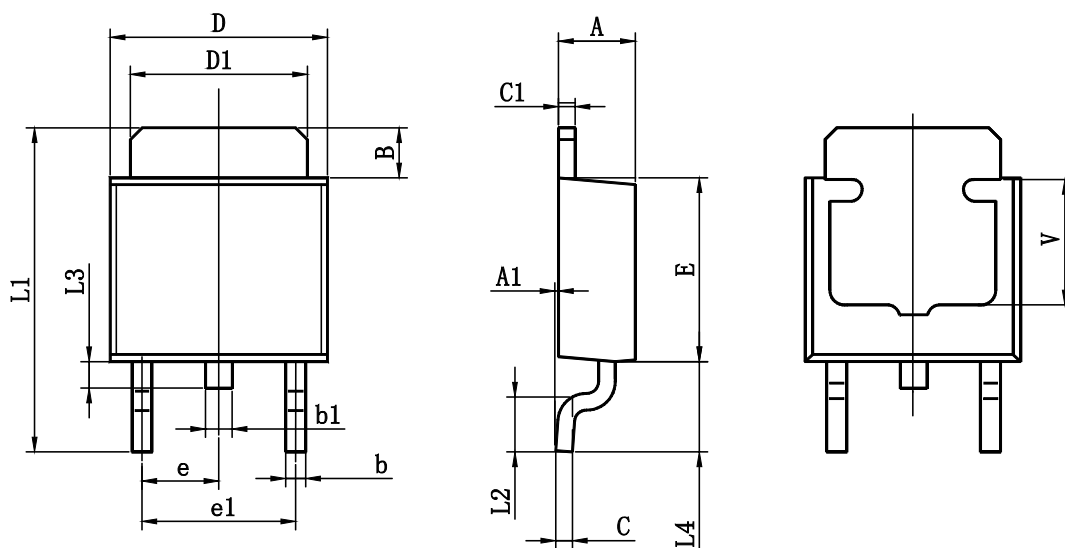

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L1	9.500	9.900	0.374	0.390
L2	1.400	1.780	0.055	0.070
L3	0.650	0.950	0.026	0.037
L4	2.550	2.900	0.100	0.114
V	3.80REF		0.150REF	