

**TOSHIBA****TA4003F**

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC


# TA4003F

## VHF~UHF WIDE BAND AMPLIFIER



### FEATURES

- Band Width 1.5CHz (Typ.) (3dB down,  $V_{CC} = 2V$ )
- High Gain :  $|S_{21}|^2 = 11dB$  (Typ.), ( $f = 500MHz$ ,  $V_{CC} = 2V$ )
- Operating Supply Voltage :  $V_{CC} = 2 \sim 3V$
- Low Current Operation :  $I_{CC} = 3.5mA$  (Typ.) ( $V_{CC} = 2V$ )
- Small Package

### PIN ASSIGNMENT (TOP VIEW)



### Marking

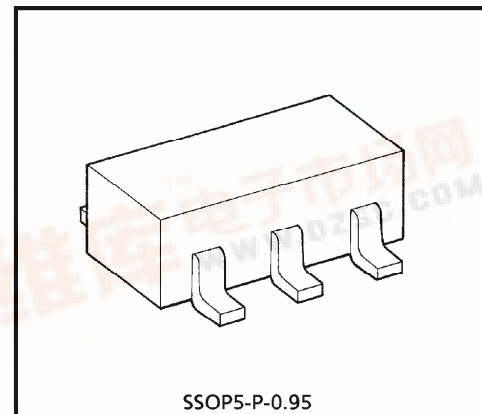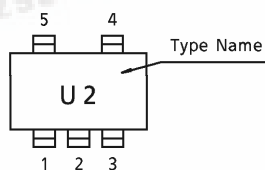

Weight : 0.014g (Typ.)

### MAXIMUM RATINGS ( $T_a = 25^\circ C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	$V_{CC}$	4	V
Total Power Dissipation	$P_D^*$	300	mW
Operating Temperature	$T_{opr}$	$-40 \sim 85$	$^\circ C$
Storage Temperature	$T_{stg}$	$-55 \sim 125$	$^\circ C$

\* When mounted glass epoxy of  $2.5cm^2 \times 1.6t$ 

961001EBA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.




ELECTRICAL CHARACTERISTICS (Ta = 25°C) (Note 1)


CHARACTERISTIC	SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Circuit Current	$I_{CC}$	—	$V_{CC} = 2V$ , Non carrier	2.5	3.5	4.5	mA
Insertion Gain	$ S_{21} ^2$	1	$V_{CC} = 2V$ , $f = 500MHz$	9	11	14	dB
Band Width	BW	1	$V_{CC} = 2V$ (Note 2)	1.2	1.5	—	GHz
Noise Figure	NF	1	$V_{CC} = 2V$ , $f = 500MHz$	—	5.2	7	dB
Input Return Loss	$ S_{11} ^2$	1	$V_{CC} = 2V$ , $f = 500MHz$	—	- 7.5	—	dB
Output Return Loss	$ S_{22} ^2$	1	$V_{CC} = 2V$ , $f = 500MHz$	—	- 7.5	—	dB
Isolation	$ S_{12} ^2$	1	$V_{CC} = 2V$ , $f = 500MHz$	—	- 24	—	dB
Maximum Output Level	$P_O$	1	$V_{CC} = 2V$ , $f = 500MHz$ , $P_{in} = 0dBmW$	—	0	—	dBmW







Note 1 : Have use for connect inductance between terminal 4 and 5      8nH at  $V_{CC} = 2V$   
Note 2 : BW is frequency of 3dB down from  $|S_{21}|^2$  at 500MHz.




TEST CIRCUIT 1. (TOP VIEW)

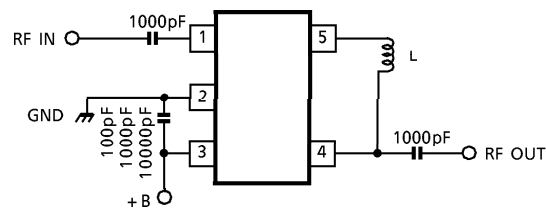

EQUIVALENT CIRCUIT

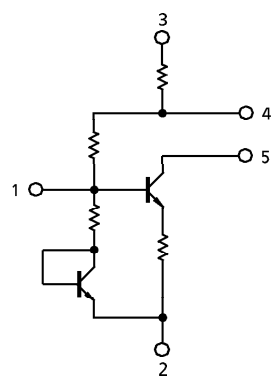


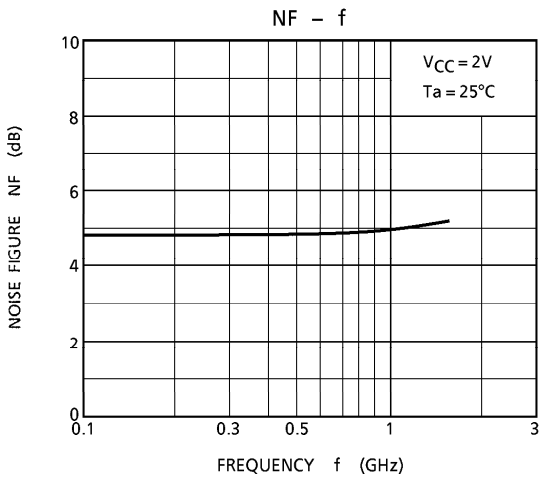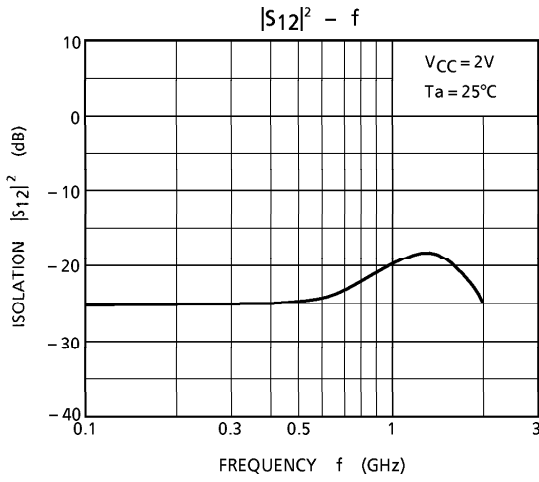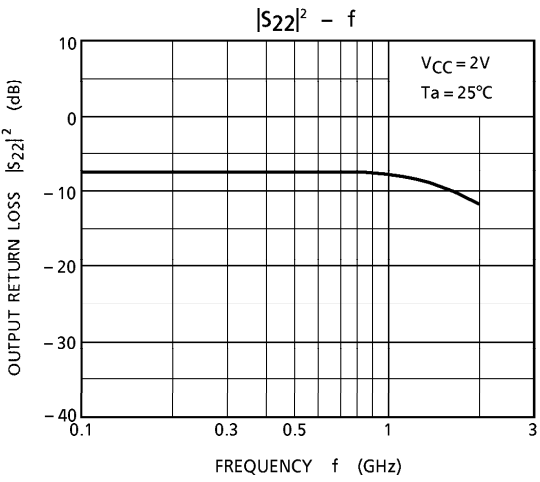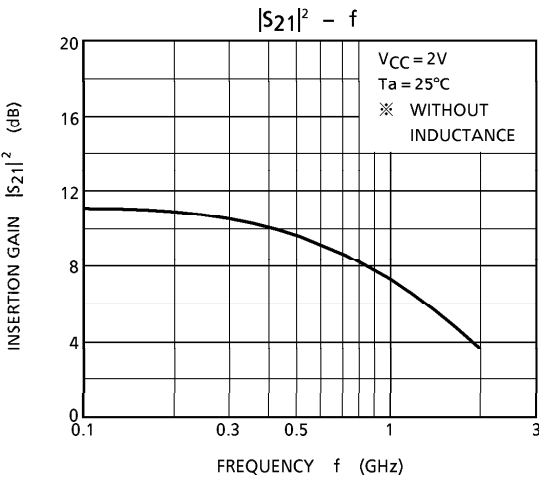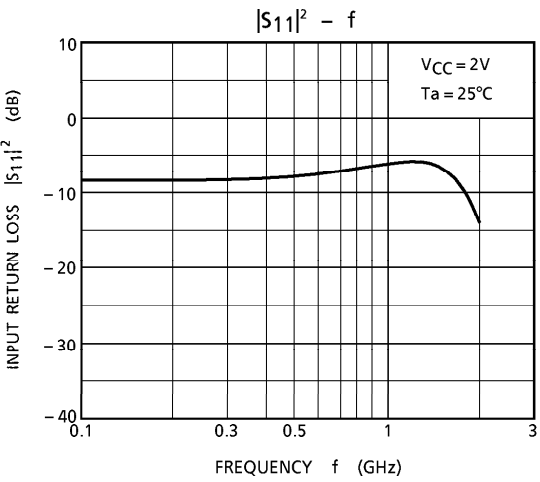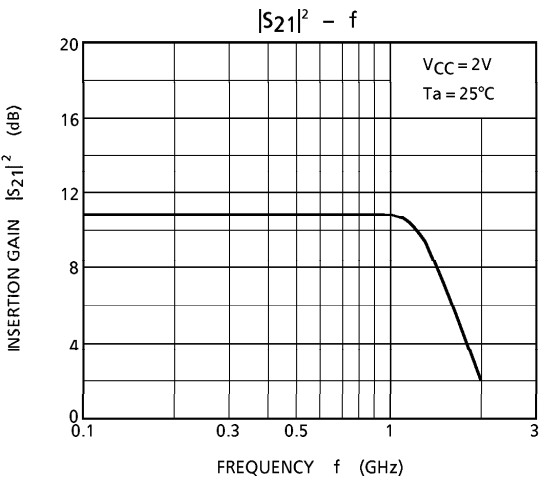

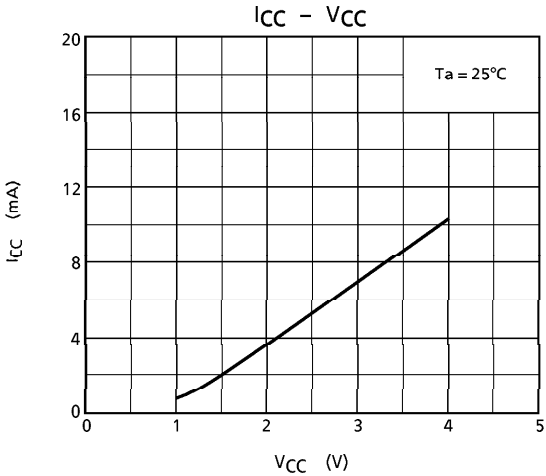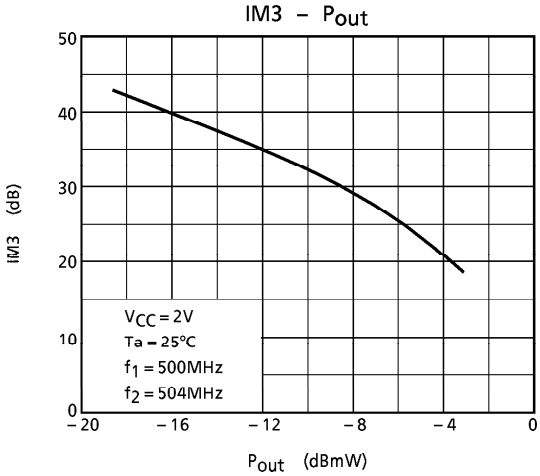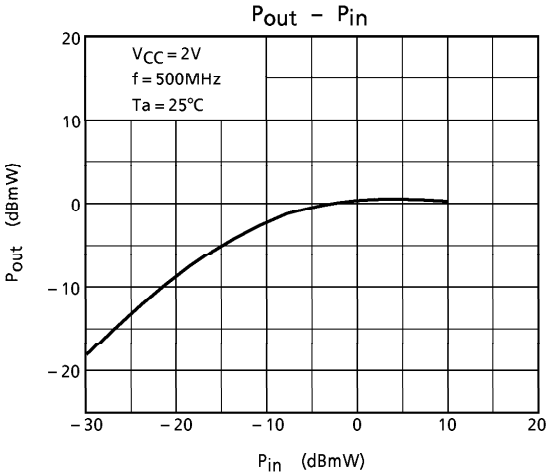

OUTLINE DRAWING  
SSOP5-P-0.95

Unit : mm

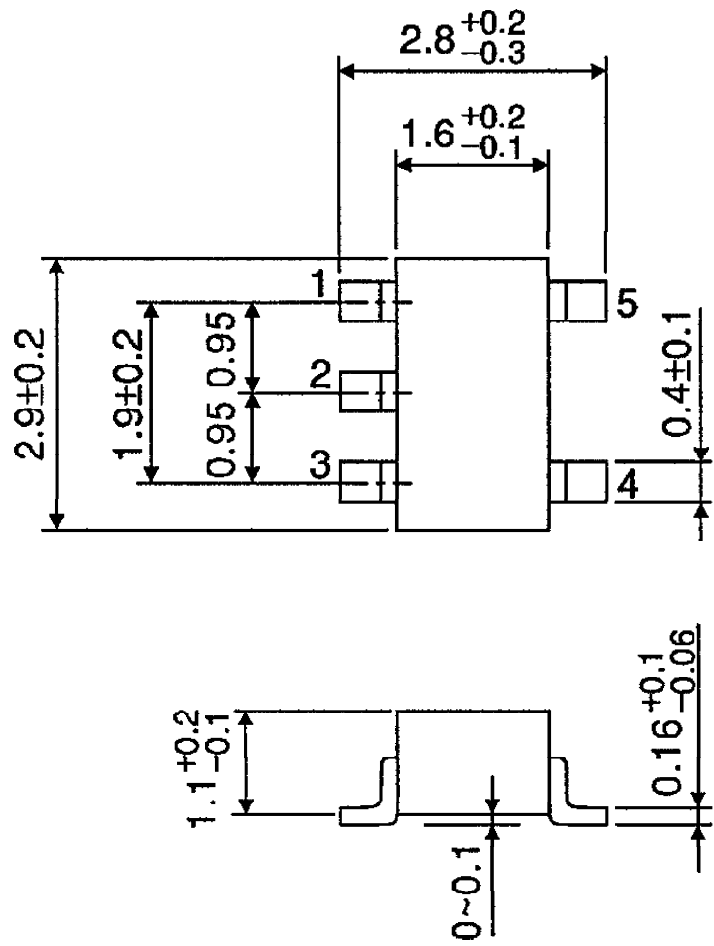

Weight : 0.014g (Typ.)