



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

SOT-23-3L Encapsulate Three Terminal Voltage Regulator

CJ79L06 Three-terminal negative voltage regulator

FEATURES

Maximum Output current

I_{OM} : 0.1 A

Output voltage


V_O : -6 V

SOT-23-3L

1. GND

2. OUT

3. IN

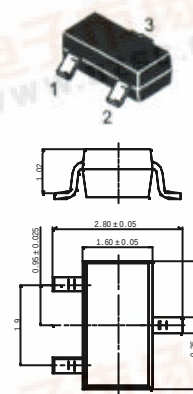

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Units
Input Voltage	V_i	-30	V
Operating Junction Temperature Range	T_{OPR}	0—+125	
Storage Temperature Range	T_{STG}	-55—+150	

ELECTRICAL CHARACTERISTICS


(V_i =-12V, I_o =40mA, 0 < T_j < 125 , C_1 =0.33 μ F, C_o =0.1 μ F, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_O	V_{IN} =-12V, I_o =40mA	-5.75	-6.0	-6.25	V
Line Regulation	$V_O - V_{IN}$	V_{IN} =-8~-20V, I_o =40mA		20	175	mV
Load Regulation	$V_O - I_o$	V_{IN} =-12V, I_o =1~100mA		21	80	mV
Quiescent Current	I_Q	V_{IN} =-12V, I_o =40mA			6.0	mA
Ripple Rejection	RR	V_{IN} =-9V~-19V, I_o =40mA, e_{IN} =1V _{P-P} , f =120Hz	41	48		dB
Output Noise Voltage	V_{NO}	V_{IN} =-12V, f =10Hz~100KH, I_o =40mA		44		μ V

TYPICAL APPLICATION

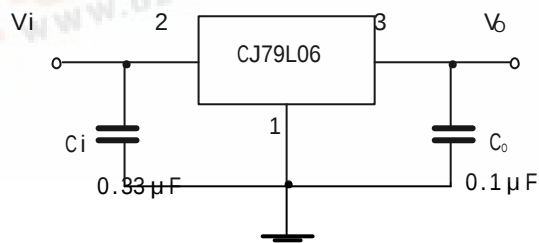

SOT-23-3L PACKAGE OUTLINE DIMENSIONS

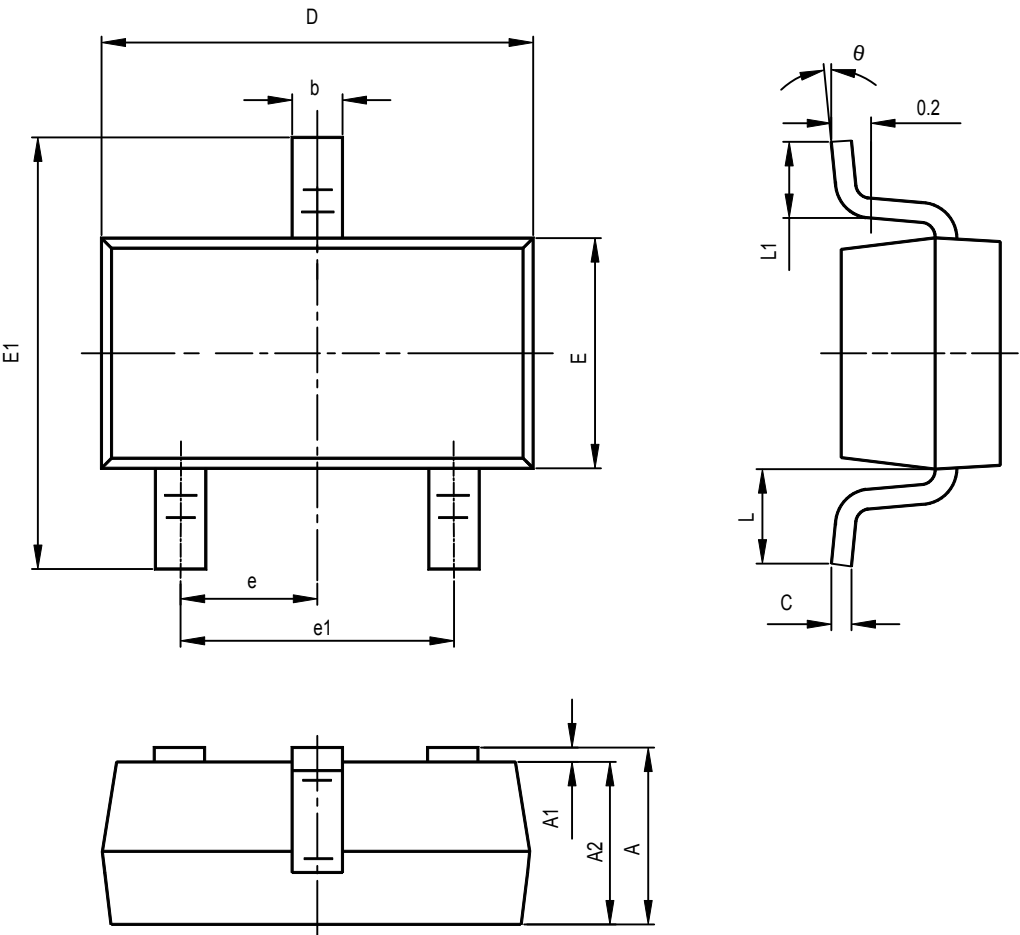

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.400	0.012	0.016
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TPY		0.037TPY	
e1	1.800	2.000	0.071	0.079
L	0.700REF		0.028REF	
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°