



2 in 1 Power Transformer < SMD Type: CLS Series >

Type: CLS62

◆ Product Description


- 7.3×7.1mm Max.(L×W), 2.5mm Max. Height.
- Inductance Range: 10 μ H~39mH, Rated current range: 37mA~700mA
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.




◆ Feature

- Magnetically shielded construction.
- Ideally used in power supply of DSC、DVC、Note PC .
- RoHS Compliance

◆ Dimensions (mm)

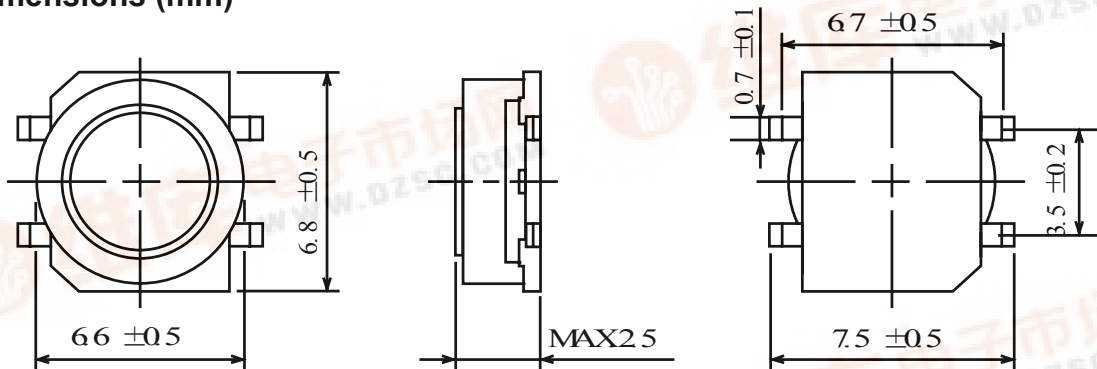


◆ Schematics (Bottom)



"S" indicates winding start.

◆ Land Pattern (mm)

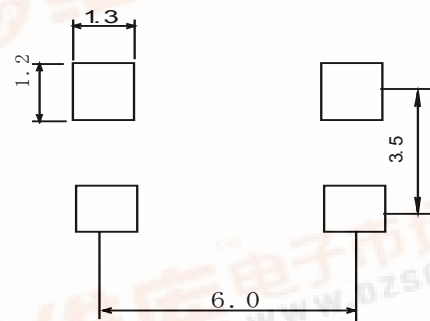

◆ Specification

Sample No.	Inductance (1-4) (100kHz/1.0V)	D.C.R. (1-4)	Rated current (1-4)
6328-T101	10 μ H \pm 30%	220m Ω Max.	0.68A

※ Rated current: The D.C. current at which the inductance decreases to 90% of its initial value or when $\Delta t=40^{\circ}\text{C}$, whichever is lower ($T_a=20^{\circ}\text{C}$).