



Type: CLS74


Product Description

- 8.3 × 8.3mm Max.(L × W), 5.2mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.


Feature

- Magnetically shielded construction.
- Ideally used in power supply of DSC, Note PC and DVC.
- RoHS Compliance

Dimensions (mm)

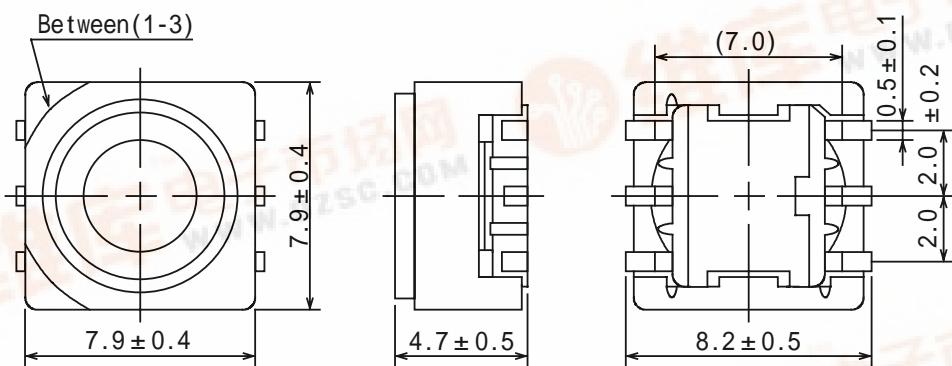


Schematics (Bottom)



“S” is winding start.

Land Pattern (mm)

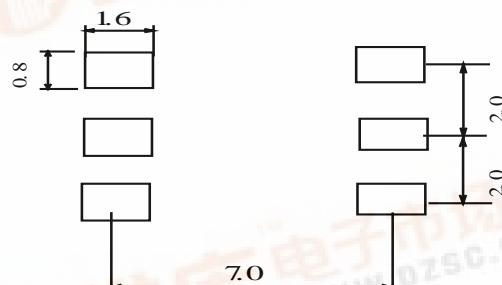

Specification

Sample No.	Inductance (1-3) 1kHz/1V	D.C.R. (1-3) @20	Rated current (1-3)
6322-T019	250 μ H ± 35%	2.0 Max.	160mA

Rated current: The D.C. current at which the inductance decreases to 90% of its initial value or When $t=40$, whichever is lower($Ta=20$).