



查询CLV1015E-LF供应商

Z-Communications, Inc.

9939 Via Pasar • San Diego, CA 92126
TEL (858) 621-2700 FAX (858) 621-2722


捷多邦，专业PCB打样工厂，24小时加急出货

CLV1015E-LF

VOLTAGE CONTROLLED OSCILLATOR

Rev A1

PHASE NOISE (1 Hz BW, typical)

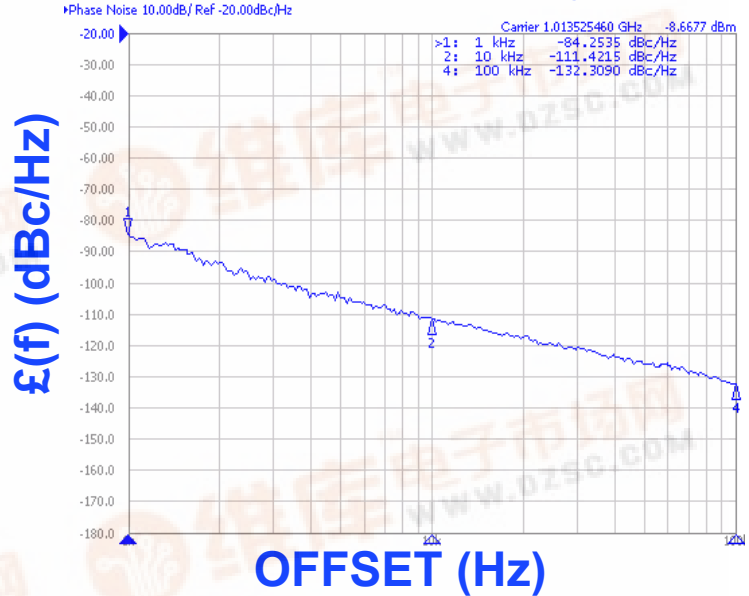

FEATURES

- Frequency Range: 995 - 1032 MHz
- Tuning Voltage: 0.6-5 Vdc
- MINI-14S - Style Package

APPLICATIONS

- Data Transmitter
- Digital Radios
- Satellite Communications

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	995 - 1032	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-110	dBc/Hz
Harmonic Suppression (2nd, typ.)	-35	dBc
Tuning Voltage	0.6-5	Vdc
Tuning Sensitivity (avg.)	21	MHz/V
Power Output	-3.5±2.5	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<0.5	MHz/V
Pulling (14dB Return Loss, Any Phase)	<2	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-14S	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	4.5	Vdc
Supply Current (Icc, typ.)	12	mA

All specifications are typical unless otherwise noted and subject to change without notice.


APPLICATION NOTES

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs


NOTES:



TUNING CURVE, typ.

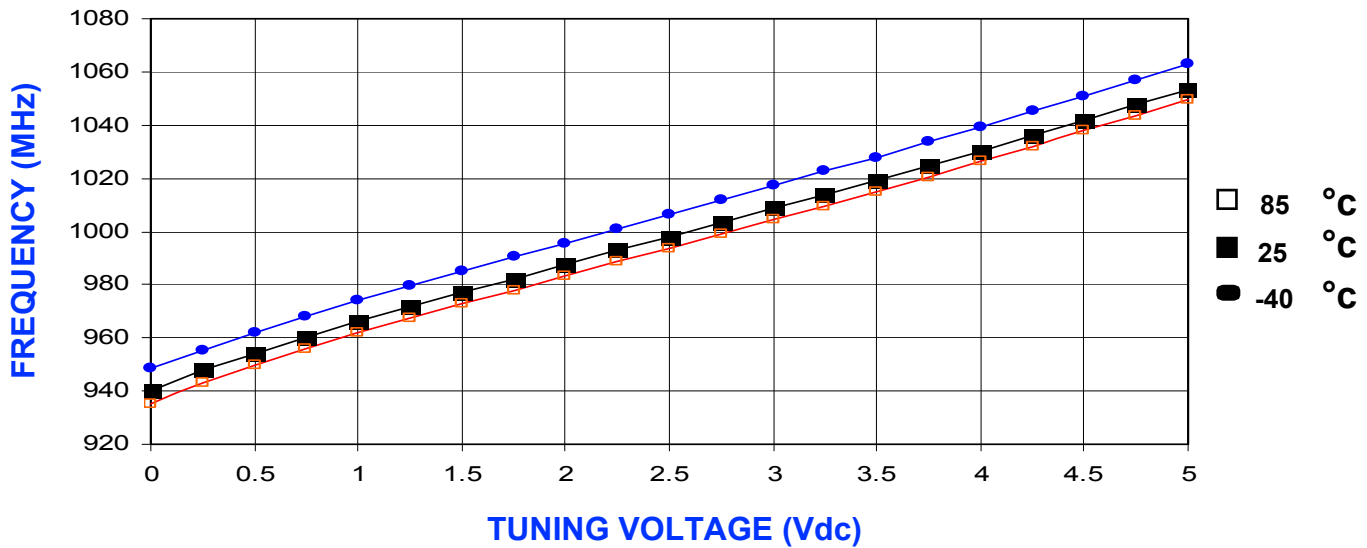

POWER CURVE, typ.

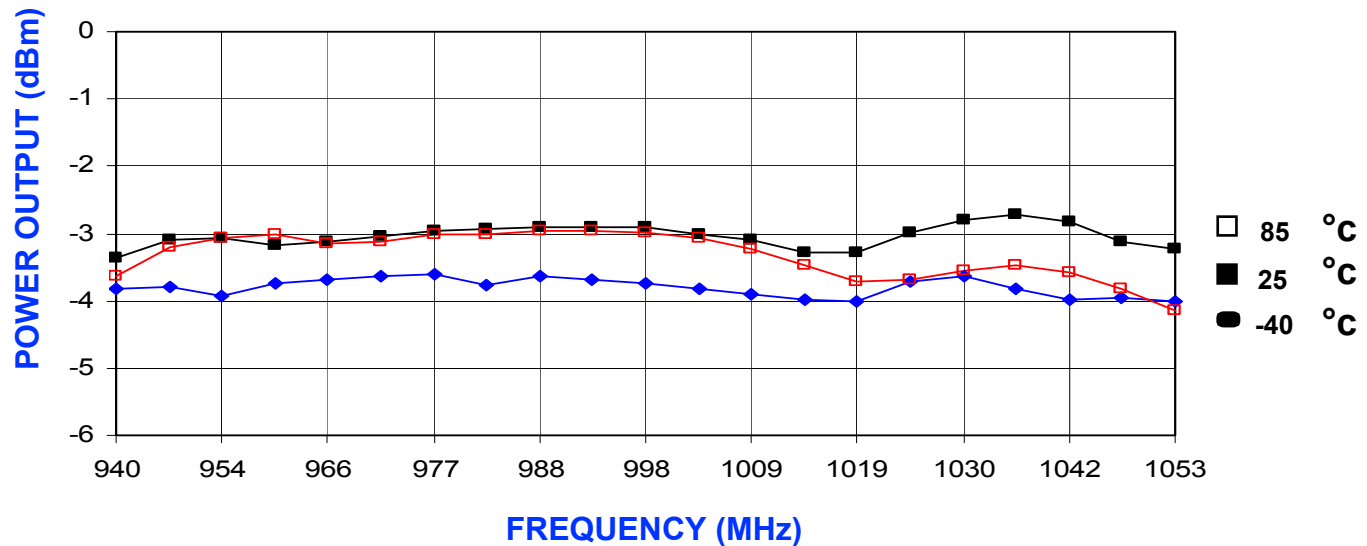

PHYSICAL DIMENSIONS

