



查询CL7824DT供应商

Continental Device India Limited

An ISO/TS 16949, ISO 9001 and ISO 14001 Certified Company


捷多邦，专业PCB打样工厂，24小时加急出货

ISO 14001



### 3-TERMINAL POSITIVE VOLTAGE REGULATOR

CL7824DT

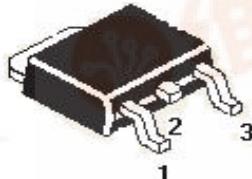

Pin: 1 Input  
2 Ground  
3 Output

TO-252 (DPAK)  
Plastic Package

Fixed Voltage Monolithic Integrated Circuit Voltage Regulators is Designed for a Wide Range of Applications

#### ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	VALUE	UNIT
Input Voltage	$V_{IN}$	40	V
Power Dissipation at $T_a=25^\circ C$	$P_D$	2.0	W
Power Dissipation at $T_c=25^\circ C$	$P_D$	15	W
Operating Free Air, Case or Virtual Junction Temperature Range	$T_j$	0 to 150	°C
Storage Temperature Range	$T_{stg}$	- 65 to +150	°C
Lead Temperature 1.6mm (1/16 inch) from Case for 10 seconds	$T_L$	260	°C

#### Recommended Operating Conditions

DESCRIPTION	SYMBOL	MIN	TYP	MAX	UNIT
Input Voltage	$V_I$	27		38	V
Output Current	$I_O$			1.5	A
Operating Junction Temperature	$T_j$	0		125	°C

#### ELECTRICAL CHARACTERISTICS

(At Specified Virtual Junction Temperature,  $V_I=33V$ ,  $I_O=500mA$ , (unless specified otherwise)


DESCRIPTION	SYMBOL	*TEST CONDITION	MIN	TYP	MAX	UNIT
Output Voltage	** $V_O$	$25^\circ C$	23		25	V
		$I_O=5mA$ to 1A, $0^\circ C$ to $125^\circ C$ $V_I=27V$ to $38V$ , $P \leq 15W$ , $0^\circ C$ to $125^\circ C$	22.8		25.2	V
Line Regulation	$R_{BGIN}$	$V_I=27V$ to $38V$ , $25^\circ C$			480	mV
		$V_I=30$ to $36V$ , $25^\circ C$			240	mV
Ripple Rejection	$R_R$	$V_I=28V$ to $38V$ , $f=120Hz$ , $0^\circ$ to $125^\circ C$	50			dB
Load Regulation	$R_{BGL}$	$I_O=5mA$ to $1.5A$ , $25^\circ C$			480	mV
		$I_O=250mA$ to $750mA$ , $25^\circ C$			240	mV
Output Resistance	$r_O$	$f=1KHz$ , $0^\circ C$ to $125^\circ C$		0.028		Ω
Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$I_O=5mA$ , $0^\circ C$ to $125^\circ C$		- 1.5		mV/°C
Output Noise Voltage	$V_{NO}$	$f=10Hz$ to $100KHz$ , $25^\circ C$		170		μV
Dropout Voltage	$V_{DIF (min)}$	$I_O=1A$ , $25^\circ C$		2.0		V



\*This specification applies only for dc power dissipation permitted by absolute maximum rating.

## 3-TERMINAL POSITIVE VOLTAGE REGULATOR

CL7824DT

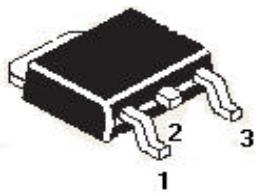

Pin: 1 Input  
2 Ground  
3 Output

TO-252 (DPAK)  
Plastic Package

### ELECTRICAL CHARACTERISTICS

(At Specified Virtual Junction Temperature,  $V_i=33V$ ,  $I_o=500mA$ , (unless specified otherwise)

DESCRIPTION	SYMBOL	*TEST CONDITION	MIN	TYP	MAX	UNIT
Quiescent Current	$I_Q$	25°C			8.0	mA
Quiescent Current Change	$\Delta I_{QIN}$	$V_i=27V$ to $38V$ , 0°C to 125°C			1.0	mA
	$\Delta I_{QL}$	$I_o=5mA$ to $1A$ , 0°C to 125°C			0.5	mA
Short Circuit Output Current	$I_{OS}$	25°C	150			mA
Peak Output Current	$I_{omax}$	25°C		2.1		A


\*Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately.

MARKING	CL 7824DT XY MX
XY= Date Code	

CL7824DT

TO-252 (DPAK)  
Plastic Package

Package TO-252 (DPAK)

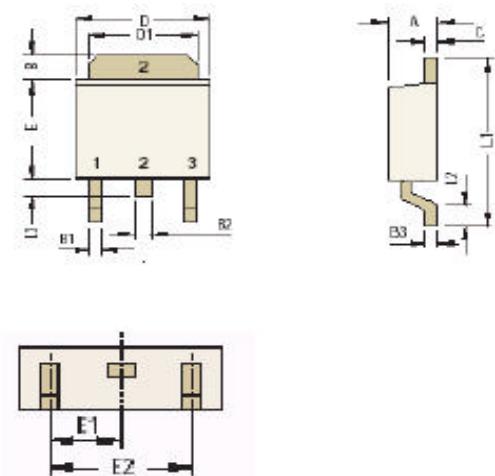


DIM	Min	max
A	2.20	2.40
B	1.30	1.50
B1	0.55	0.65
B2	0.75	0.85
B3	0.46	0.58
C	0.46	0.58
D	6.40	6.60
D1	5.20	5.40
E	5.40	5.60
E1	2.25	2.35
E2	4.50	4.70
L1	9.25	9.75
L2	0.50	
L3	0.90	1.10

All Dimensions are in mm



Pin: 1 Input  
2 Ground  
3 Output


TO-252 (DPAK) Tube Packing

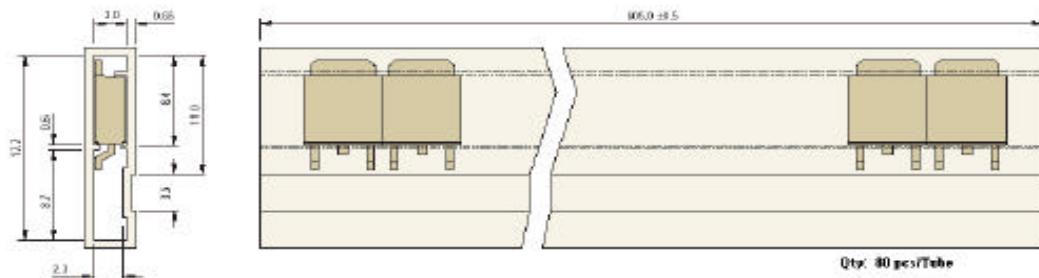

CL7824DT

TO-252 (DPAK)  
Plastic Package

TO-252 (DPAK) Tape and Reel Specification

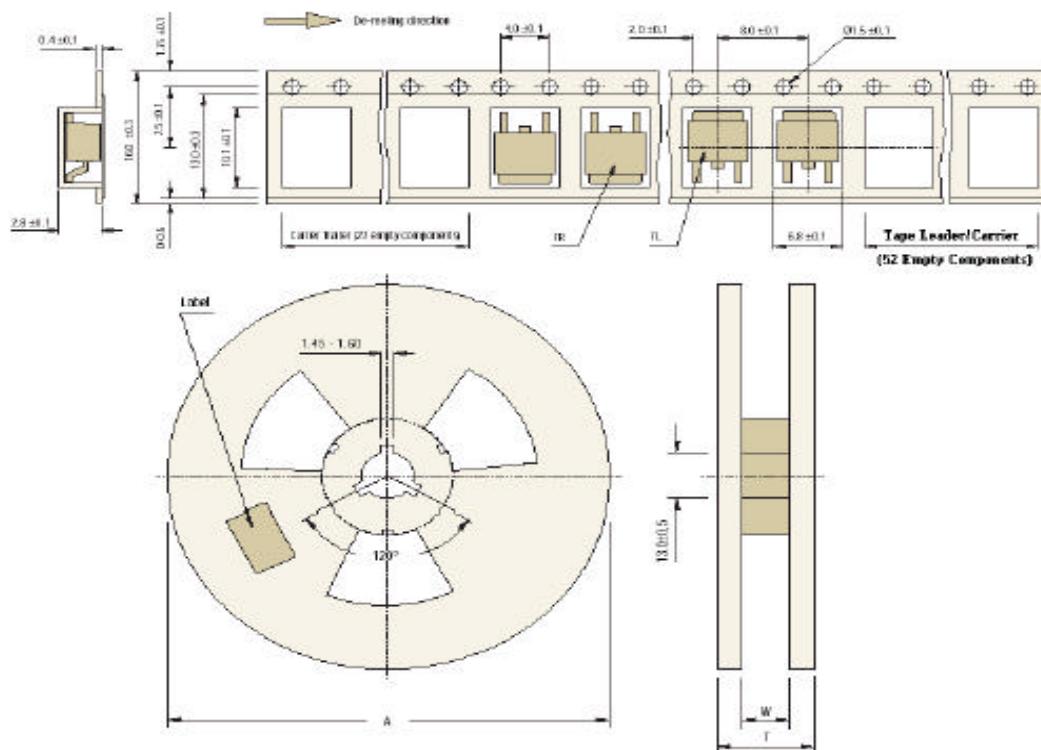

Reel Specifications					
Package	Tape Width	Reel Dia. A - Max	Devices Per Reel and MOQ	Inside Thickness W	Reel Thickness T - max
TO-252 (DPAK)	16	330	2,500	17.5±1.5	24.0

All Dimensions are in mm

Packaging Information

Package/ Case Type	Packaging Type	Std. Packing Qty
TO-252 (DPAK)	Tube	1,600
TO-252 (DPAK)	T&R	2,500

T & R: Tape and Reel  
Tube : 80 pcs/Tube

CL7824DT Rev120606E

**Component Disposal Instructions**

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

**Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of  
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119  
email@cdil.com www.cdilsemi.com