

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/ 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z

Silicon PNP epitaxial planer transistor


For digital circuits

Features


- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- Mini type package, allowing downsizing of the equipment and automatic insertion through tape packing and magazine packing.

Resistance by Part Number

	Marking Symbol	(R ₁)	(R ₂)
•	UN2111	6A	10kΩ
•	UN2112	6B	22kΩ
•	UN2113	6C	47kΩ
•	UN2114	6D	10kΩ
•	UN2115	6E	10kΩ
•	UN2116	6F	4.7kΩ
•	UN2117	6H	22kΩ
•	UN2118	6I	0.51kΩ
•	UN2119	6K	1kΩ
•	UN2110	6L	47kΩ
•	UN211D	6M	47kΩ
•	UN211E	6N	47kΩ
•	UN211F	6O	4.7kΩ
•	UN211H	6P	2.2kΩ
•	UN211L	6Q	4.7kΩ
•	UN211M	EI	2.2kΩ
•	UN211N	EW	4.7kΩ
•	UN211T	EY	22kΩ
•	UN211V	FC	2.2kΩ
•	UN211Z	FE	4.7kΩ

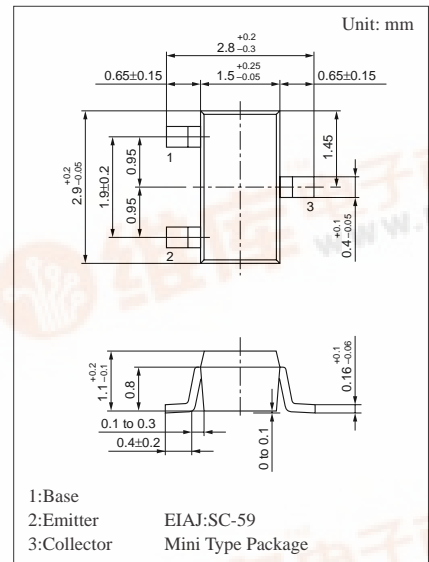

Internal Connection

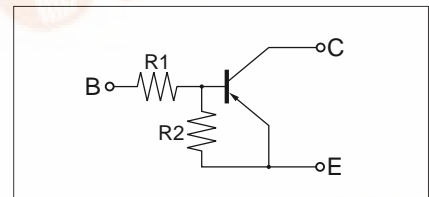

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V _{CBO}	-50	V
Collector to emitter voltage	V _{CEO}	-50	V
Collector current	I _C	-100	mA
Total power dissipation	P _T	200	mW
Function temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C



UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z

■ **Electrical Characteristics** (Ta=25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit		
Collector cutoff current		I _{CBO}	V _{CB} = -50V, I _E = 0			-0.1	μA		
		I _{CEO}	V _{CE} = -50V, I _B = 0			-0.5	μA		
Emitter cutoff current	UN2111	I _{EBO}	V _{EB} = -6V, I _C = 0			-0.5	mA		
	UN2112/2114/211E/211D/211M/211N/211T					-0.2			
	UN2113					-0.1			
	UN2115/2116/2117/2110					-0.01			
	UN211F/211H					-1.0			
	UN2119					-1.5			
	UN2118/211L/211V					-2.0			
	UN211Z					-0.4			
Collector to base voltage		V _{CBO}	I _C = -10mA, I _E = 0	-50			V		
Collector to emitter voltage		V _{CEO}	I _C = -2mA, I _B = 0	-50			V		
Forward current transfer ratio	UN2111	h _{FE}	V _{CE} = -10V, I _C = -5mA	35					
	UN2112/211E			60					
	UN2113/2114/211M			80					
	UN2115*/2116*/2117*/2110*			160	460				
	UN2119/211F/211D/211H			30					
	UN2118/211L			20					
	UN211N/211T			80	400				
	UN211V			6	20				
	UN211Z			60	200				
Collector to emitter saturation voltage		V _{CE(sat)}	I _C = -10mA, I _B = -0.3mA			-0.25	V		
				UN211V	I _C = -10mA, I _B = -1.5mA		-0.07	-0.25	V
Output voltage high level		V _{OH}	V _{CC} = -5V, V _B = -0.5V, R _L = 1kΩ	-4.9			V		
Output voltage low level		V _{OL}	V _{CC} = -5V, V _B = -2.5V, R _L = 1kΩ			-0.2	V		
				UN2113	V _{CC} = -5V, V _B = -3.5V, R _L = 1kΩ				-0.2
				UN211D	V _{CC} = -5V, V _B = -10V, R _L = 1kΩ				-0.2
				UN211E	V _{CC} = -5V, V _B = -6V, R _L = 1kΩ				-0.2
Transition frequency		f _T	V _{CB} = -10V, I _E = 1mA, f = 200MHz		80		MHz		
Input resistance	UN2111/2114/2115	R _i		(-30%)	10	(+30%)	kΩ		
	UN2112/2117/211T				22				
	UN2113/2110/211D/211E				47				
	UN2116/211F/211L/211N/211Z				4.7				
	UN2118				0.51				
	UN2119				1				
	UN211H/211M/211V				2.2				

* h_{FE} rank classification (UN2115/2116/2117/2110)

Rank	Q	R	S
h _{FE}	160 to 260	210 to 340	290 to 460


UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z

■ **Electrical Characteristics (continued)** (Ta=25°C)







Parameter		Symbol	Conditions	min	typ	max	Unit
Resis- tance ratio	UN2111/2112/2113/211L	R_1/R_2		0.8	1.0	1.2	
	UN2114			0.17	0.21	0.25	
	UN2118/2119			0.08	0.1	0.12	
	UN211D				4.7		
	UN211E				2.14		
	UN211F/211T				0.47		
	UN211H			0.17	0.22	0.27	
	UN211M				0.047		
	UN211N				0.1		
	UN211V				1.0		
	UN211Z				0.21		

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z

Common characteristics chart






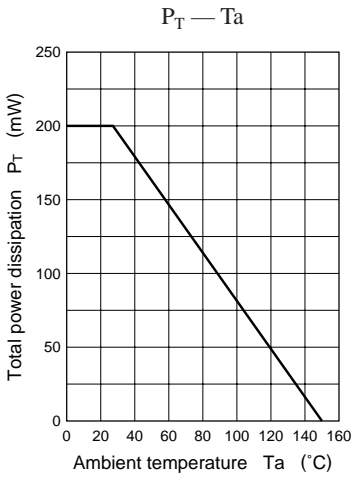


Characteristics charts of UN2111

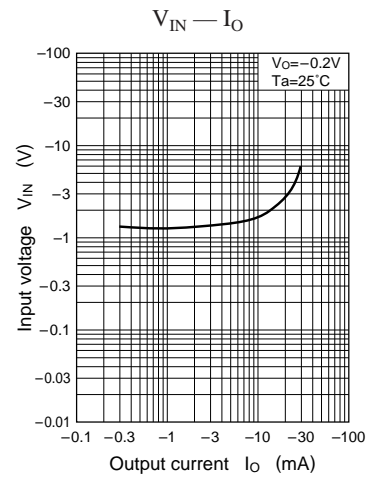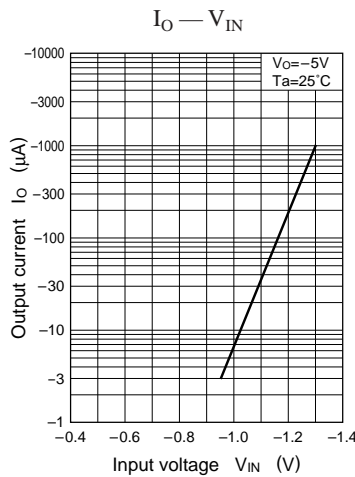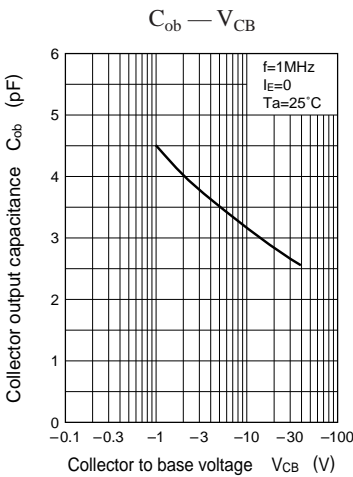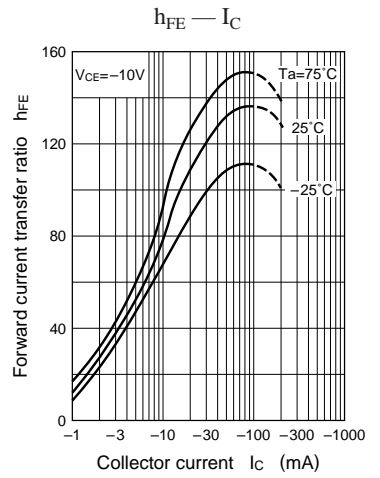
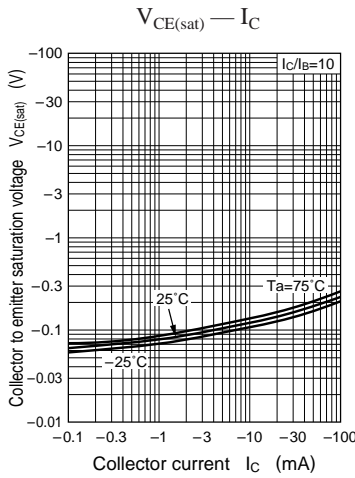
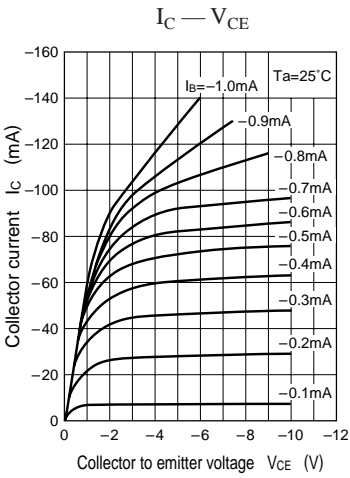


UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z




Characteristics charts of UN2112

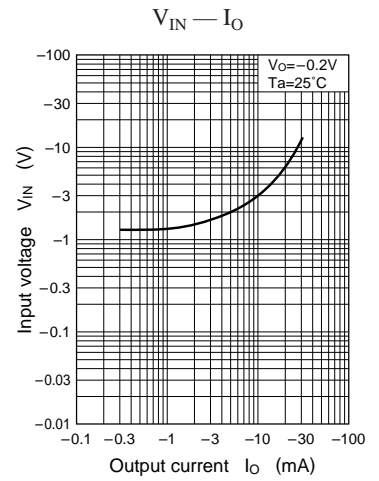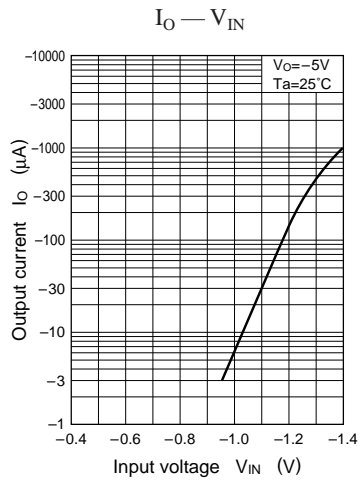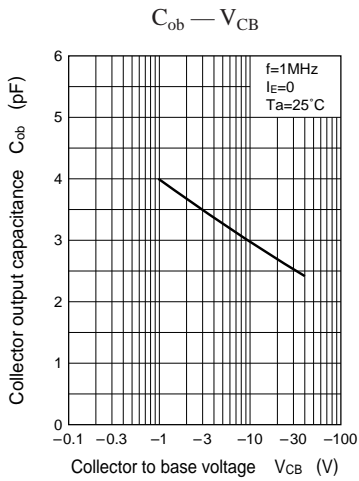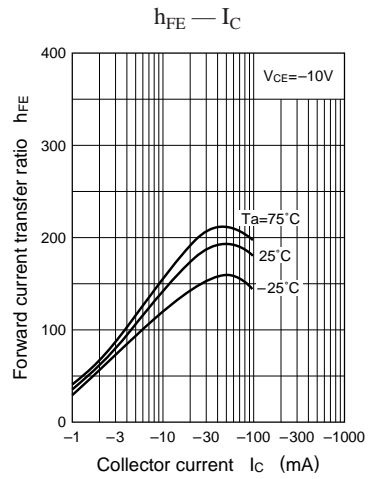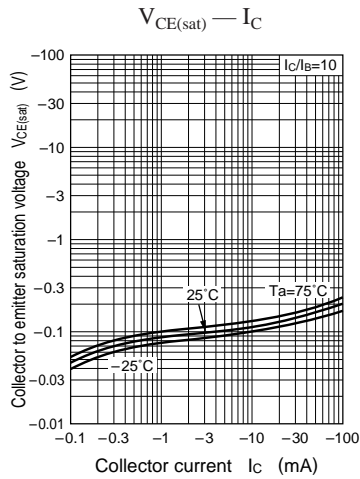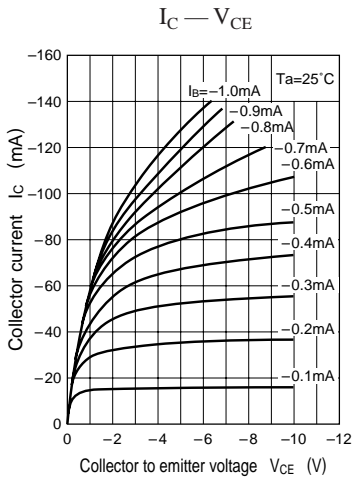







Characteristics charts of UN2113

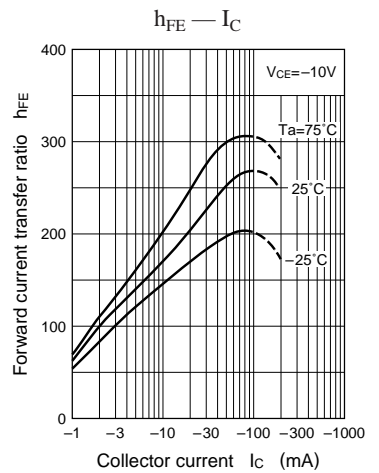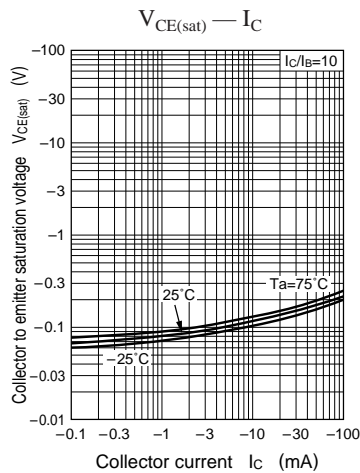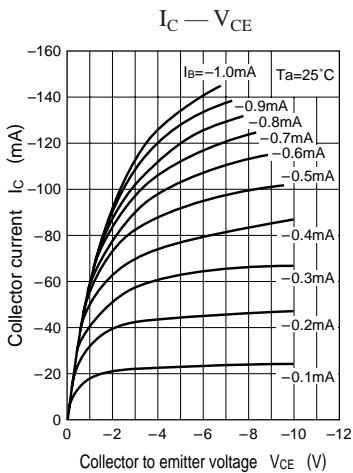

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z




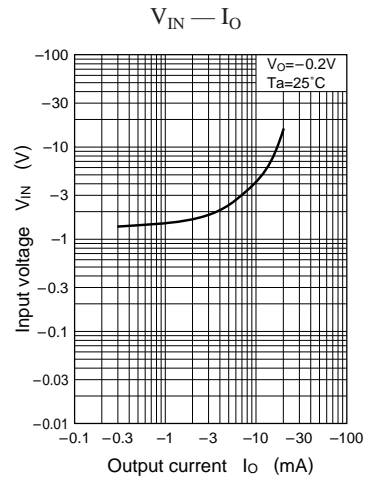
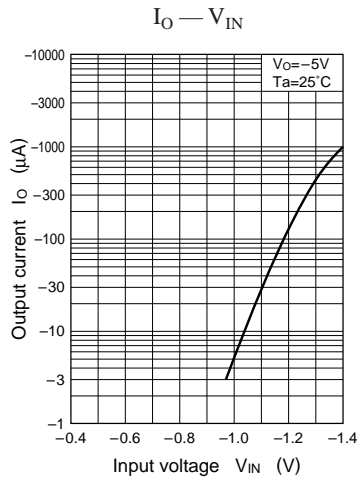
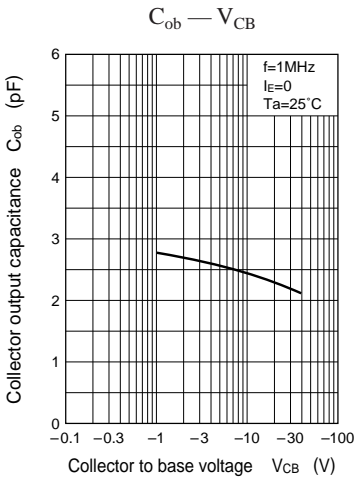


Characteristics charts of UN2114

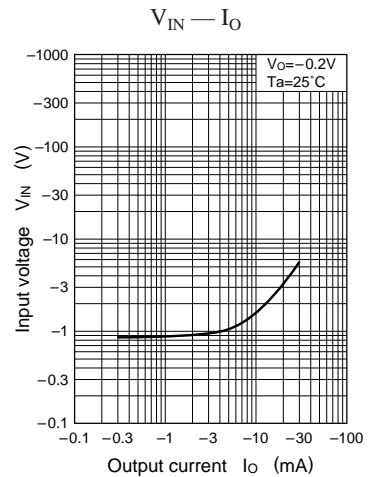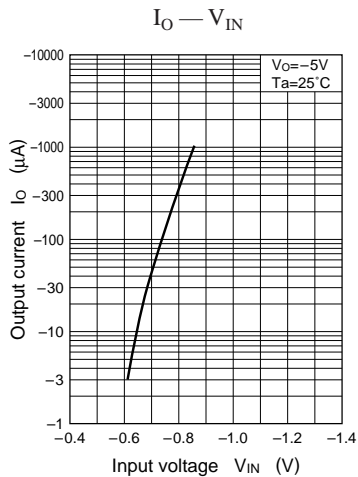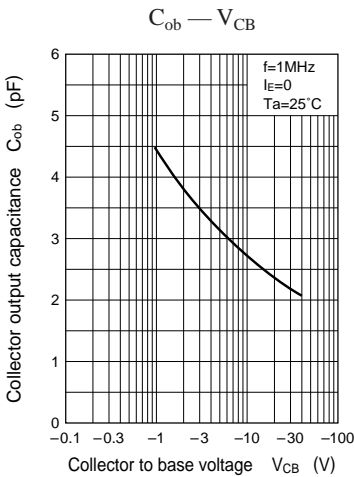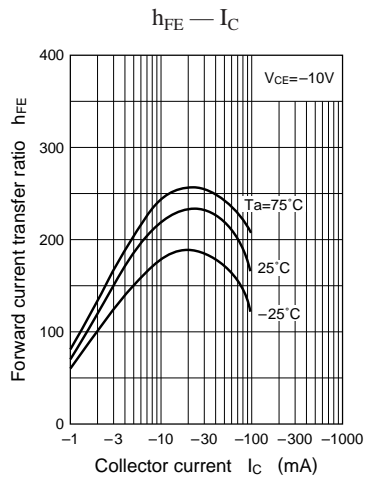
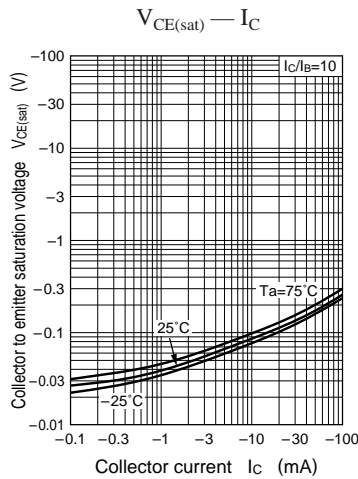
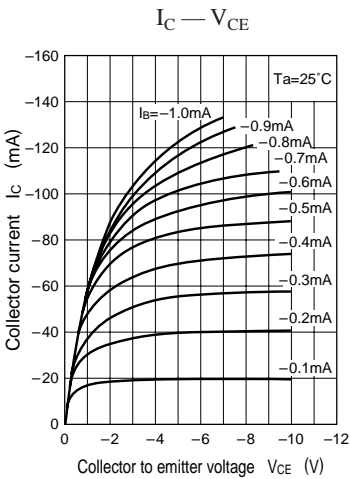


UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z




Characteristics charts of UN2115

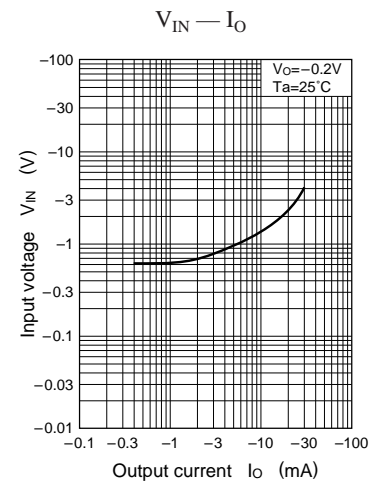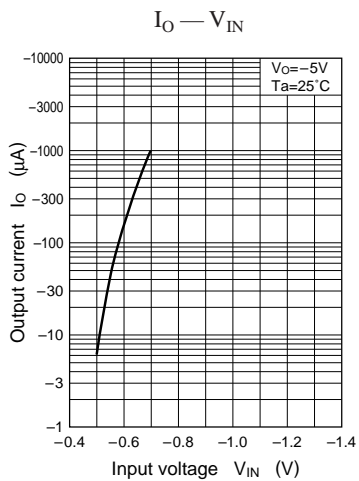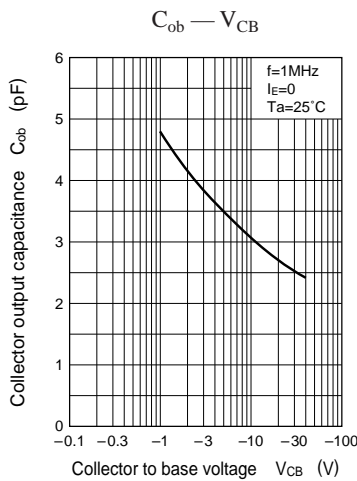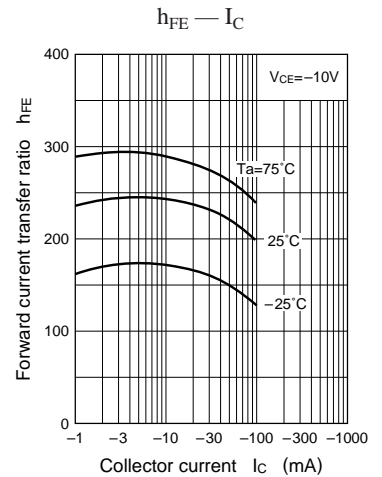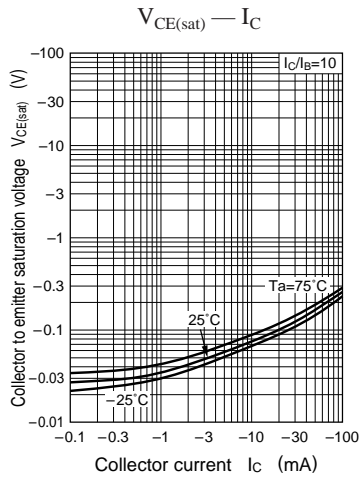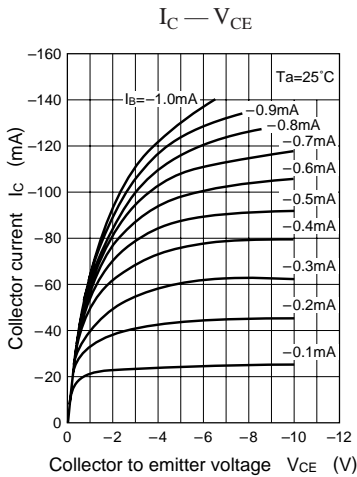







Characteristics charts of UN2116

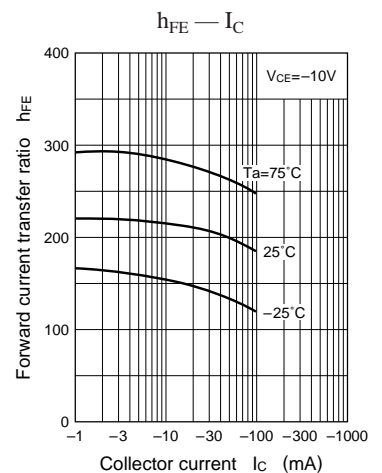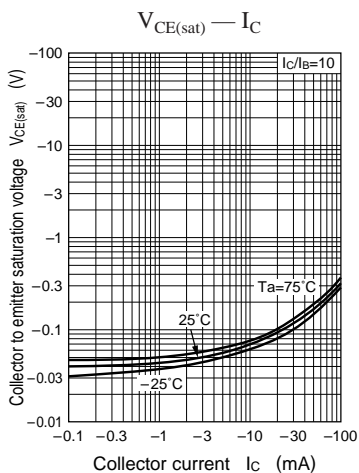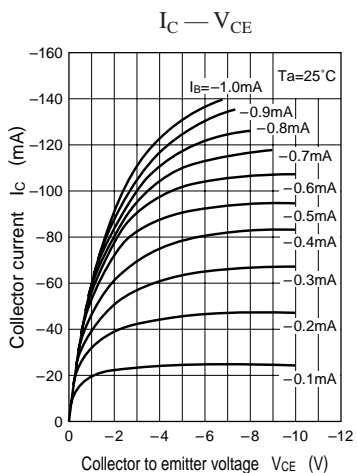

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
 Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z




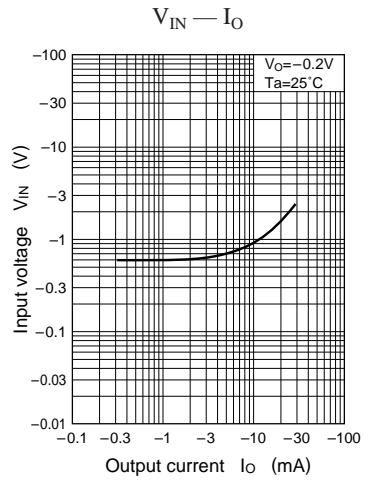
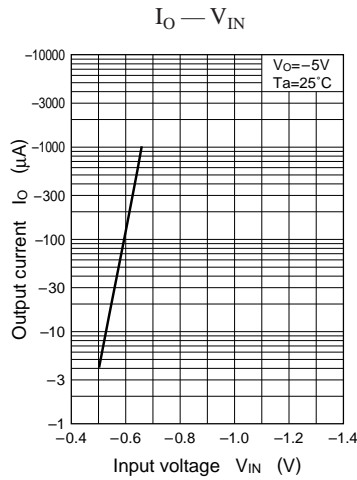
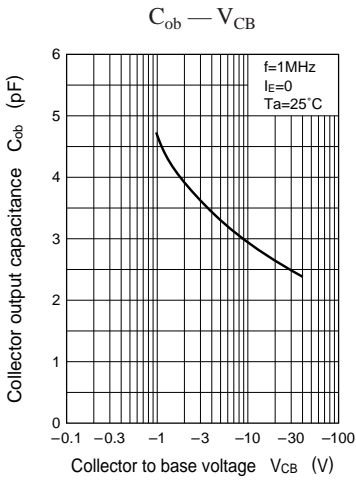


Characteristics charts of UN2117

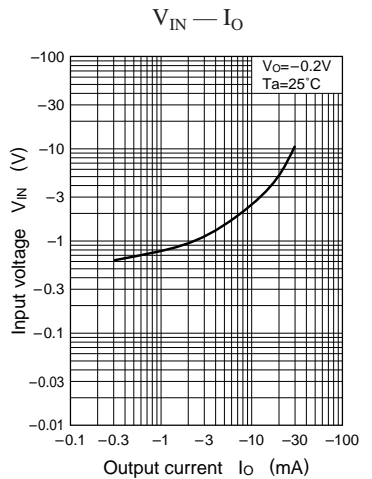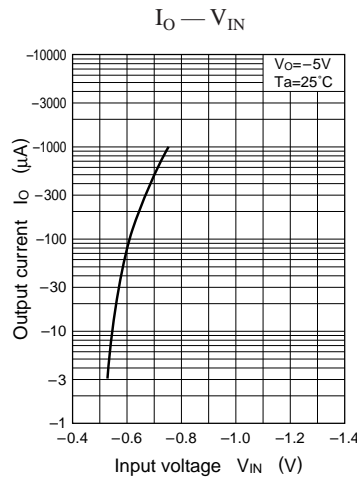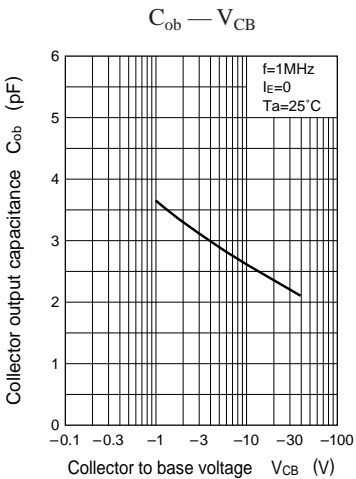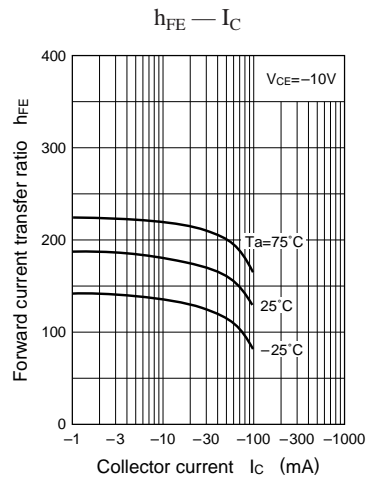
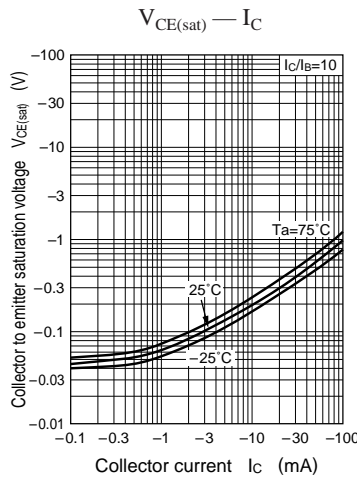
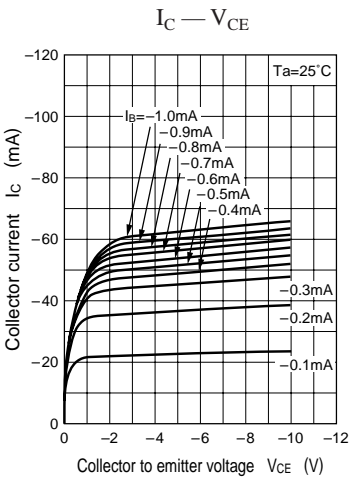


UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z




Characteristics charts of UN2118

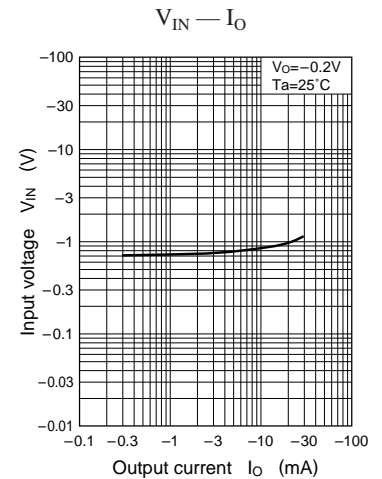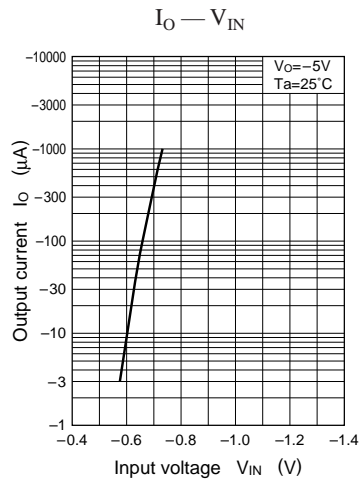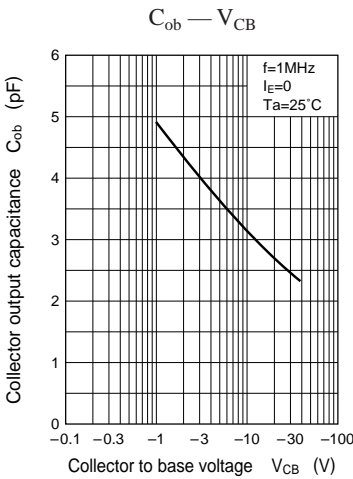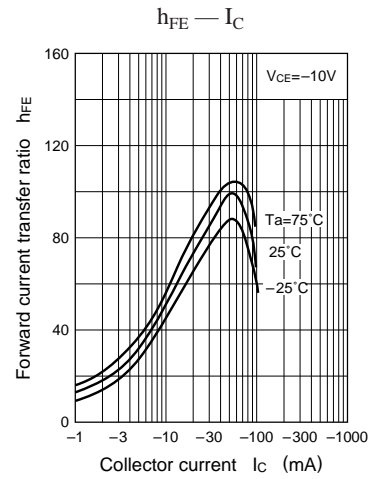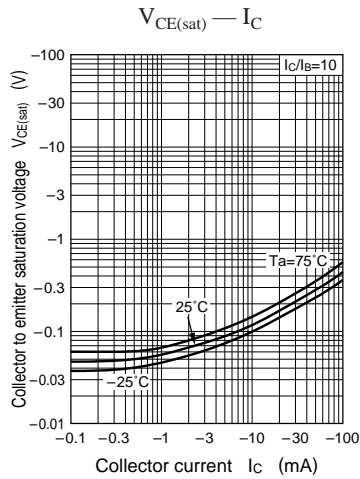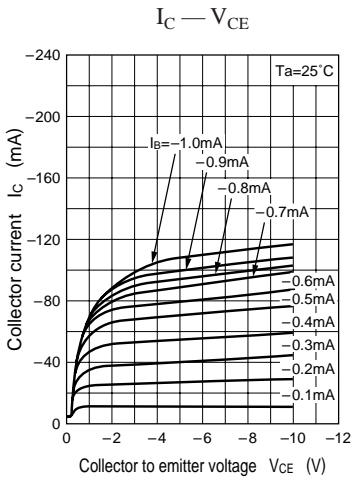







Characteristics charts of UN2119

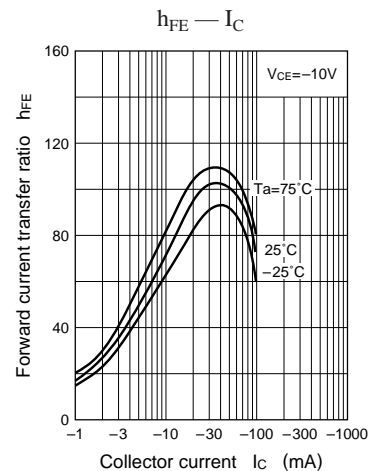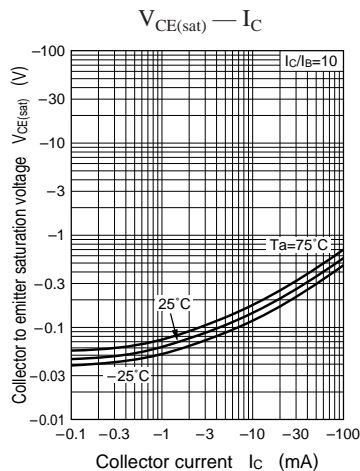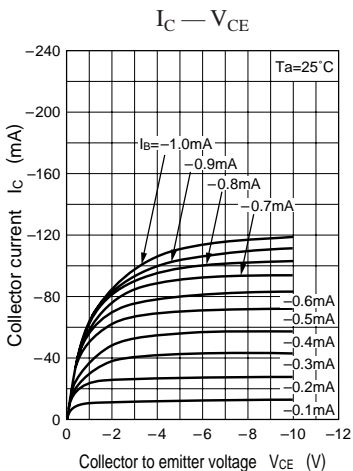

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z




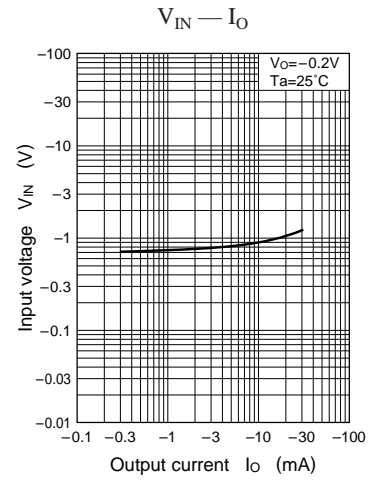
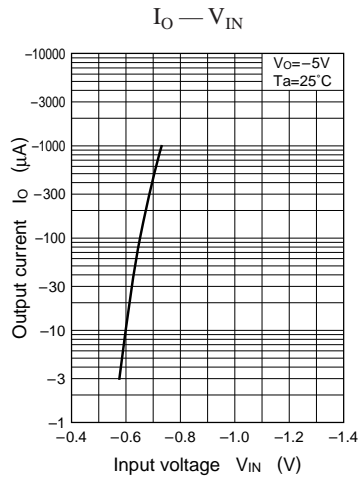
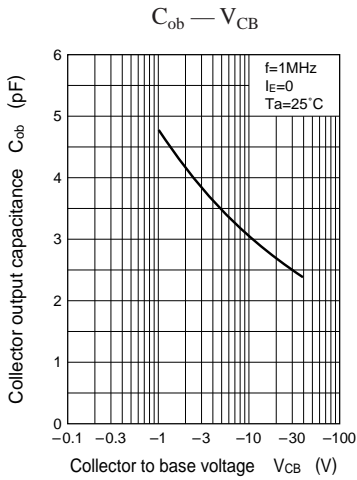


Characteristics charts of UN2110

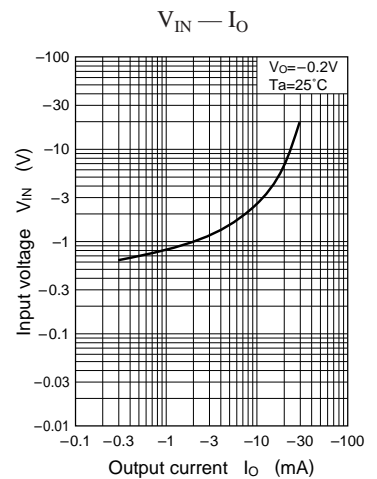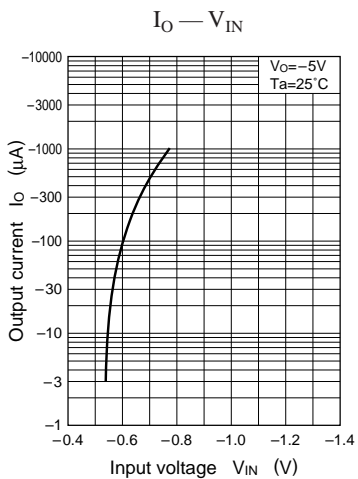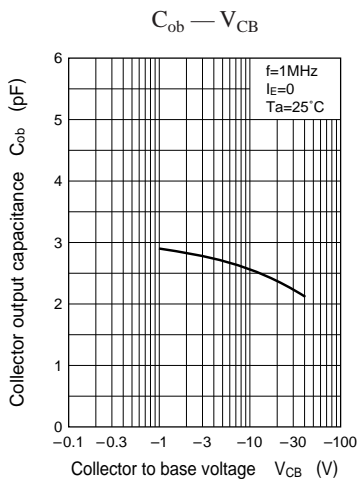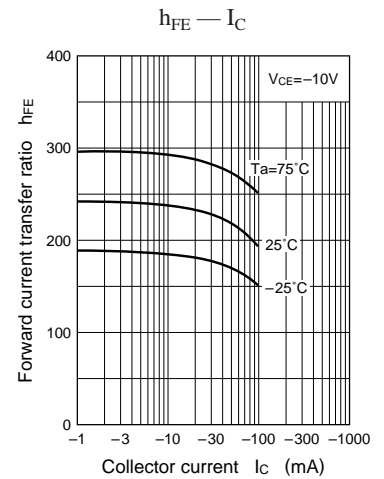
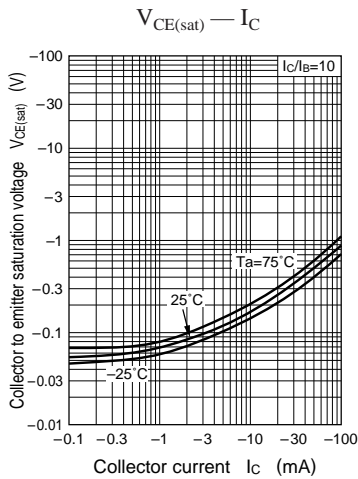
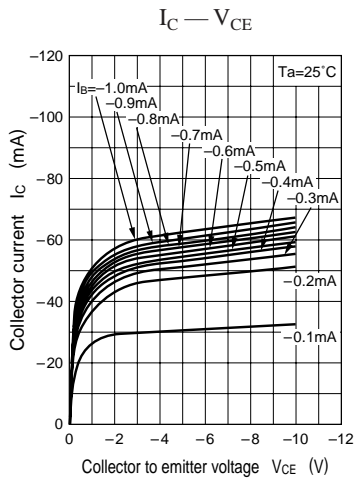


UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z




Characteristics charts of UN211D

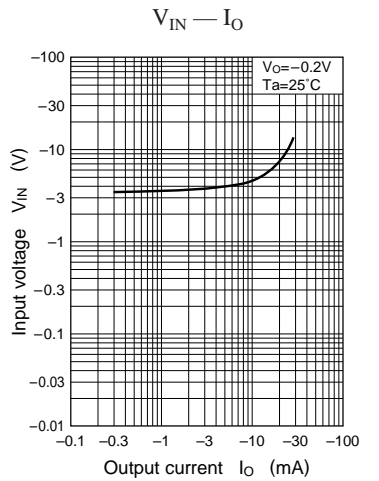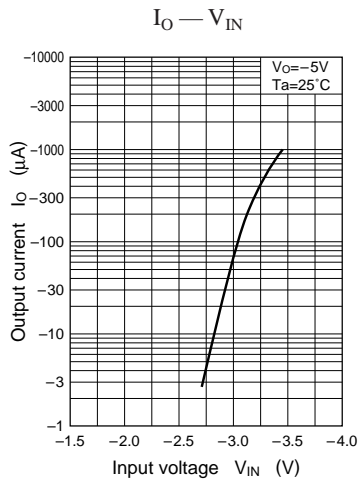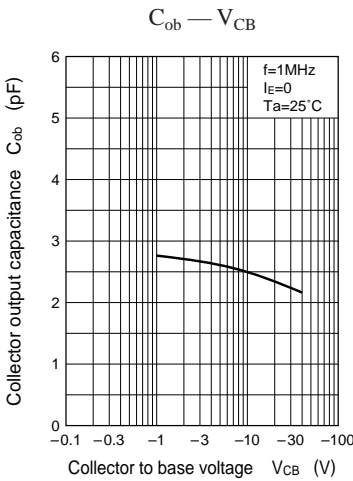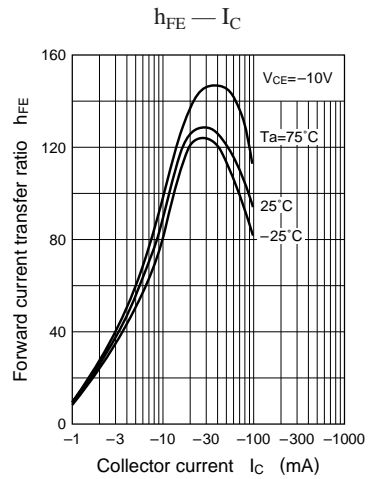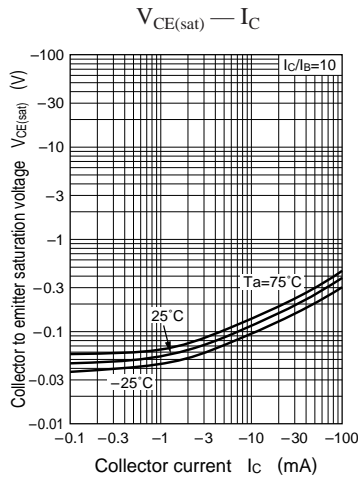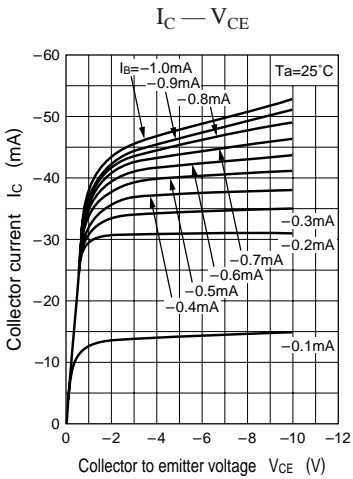







Characteristics charts of UN211E

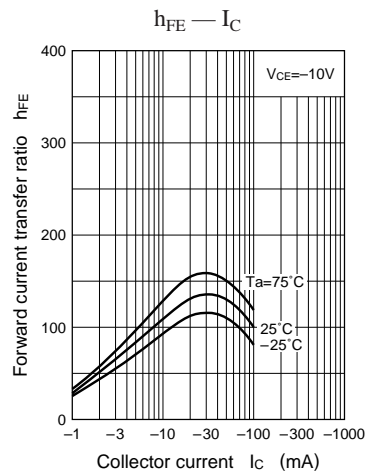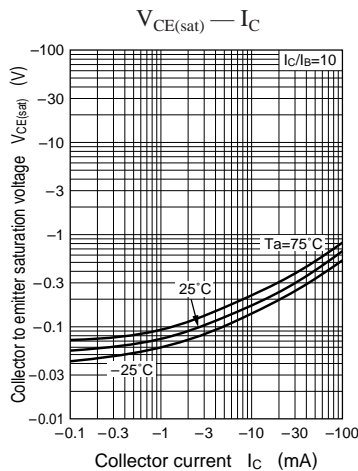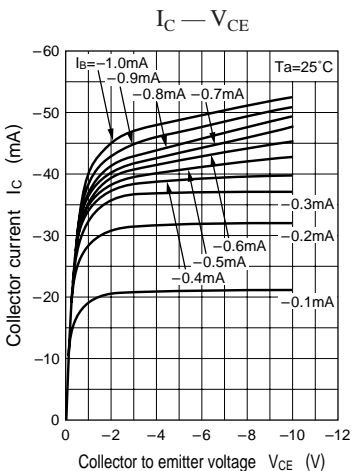

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z



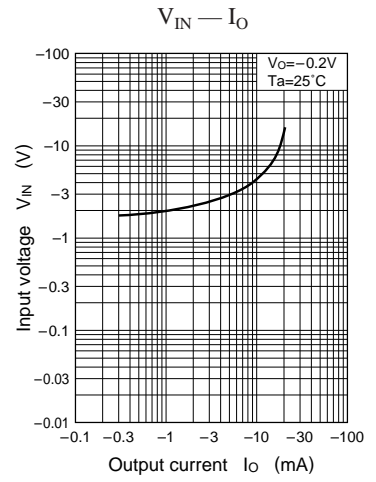
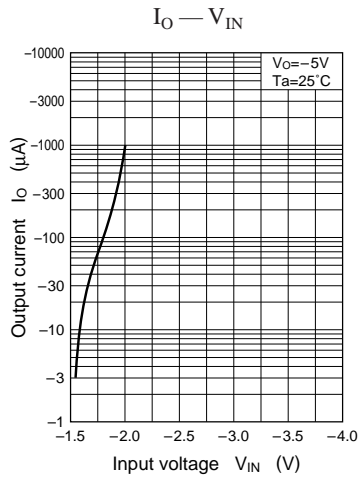
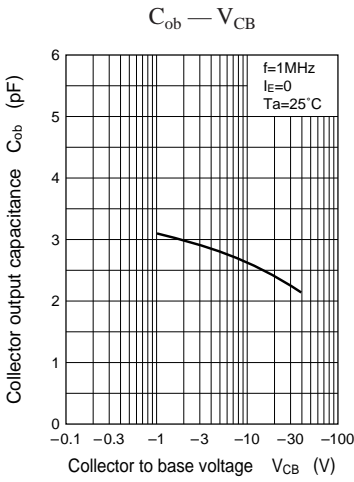


Characteristics charts of UN211F

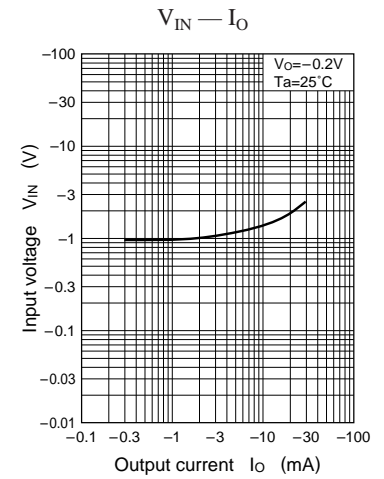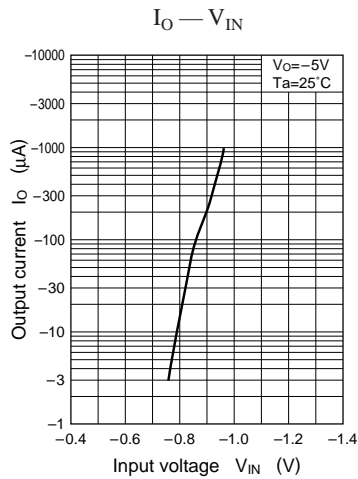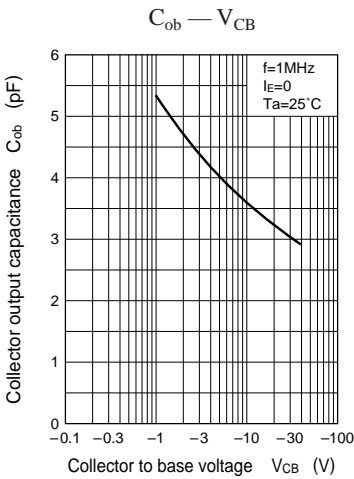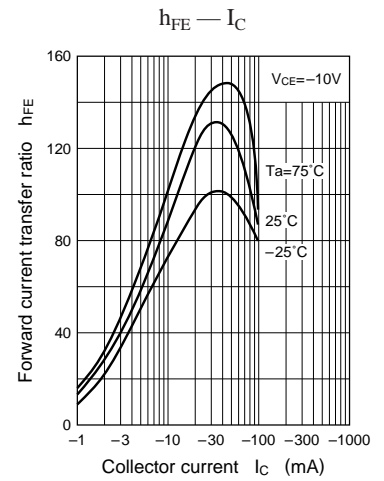
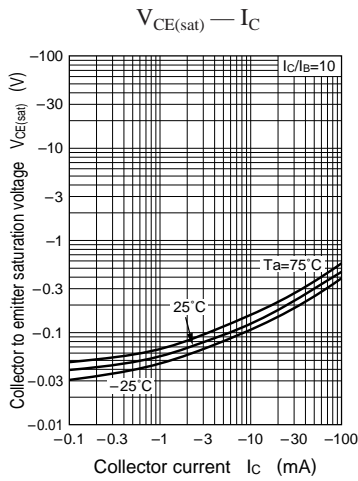
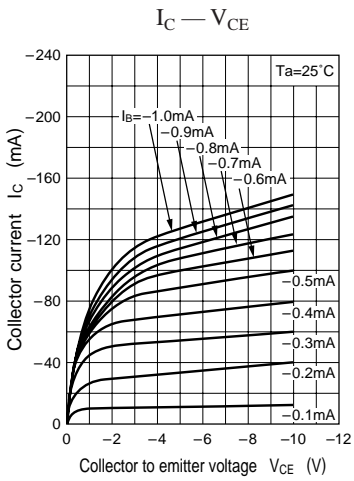


UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z



Characteristics charts of UN211H

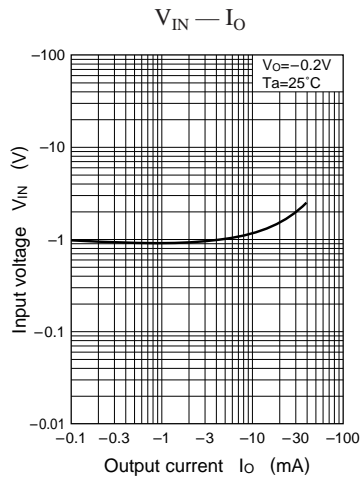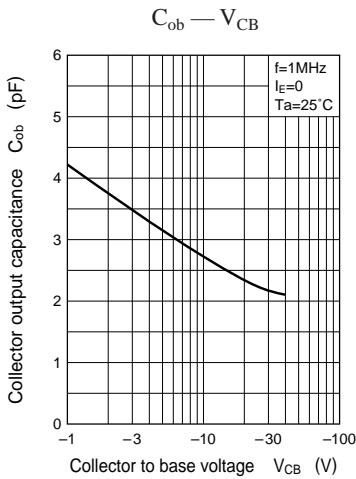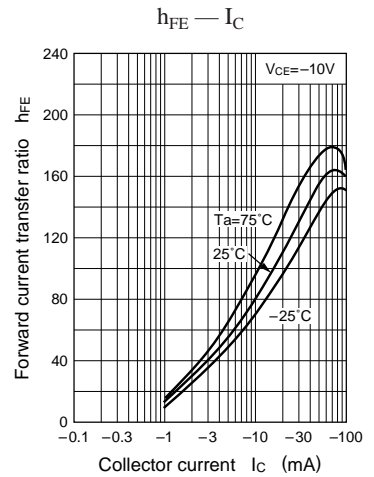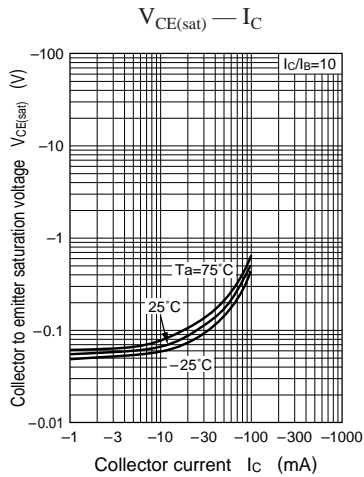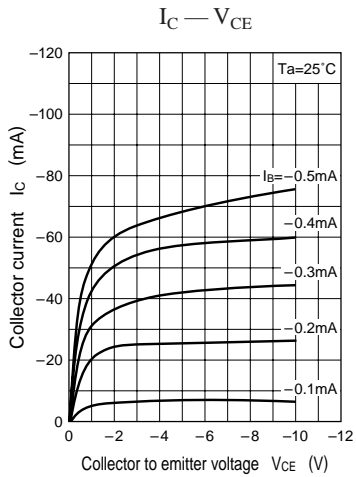







Characteristics charts of UN211L

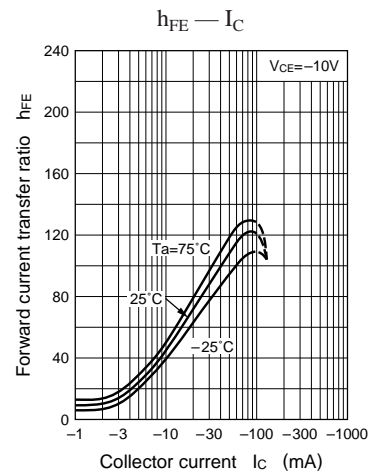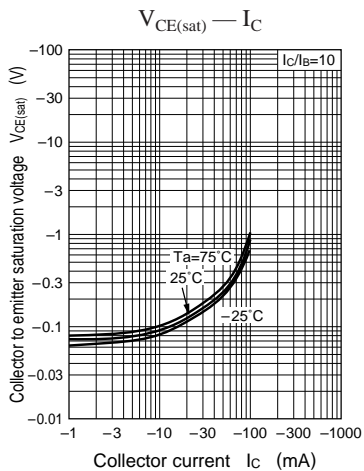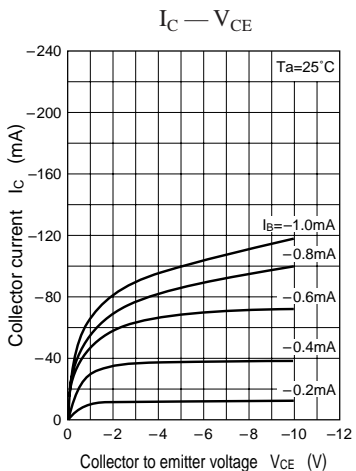

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z





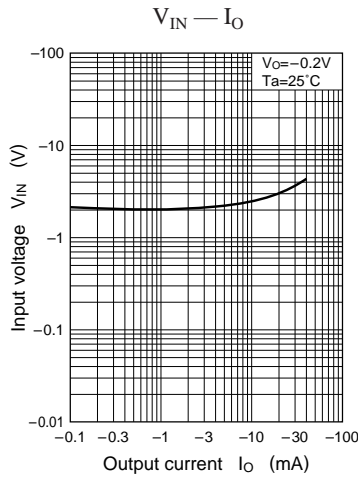
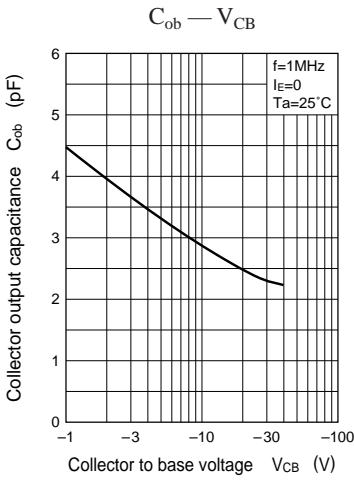


Characteristics charts of UN211M

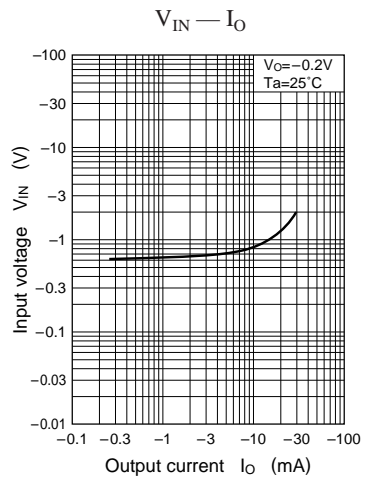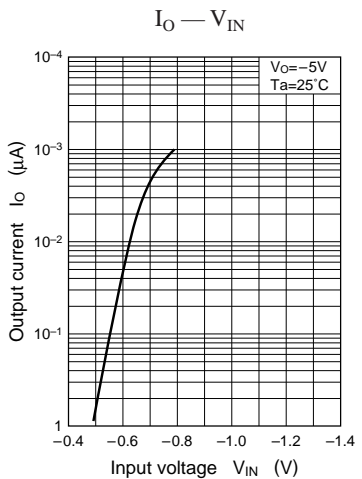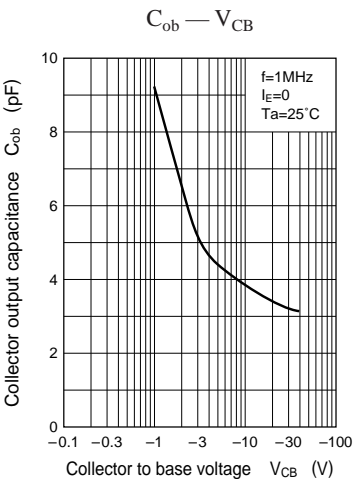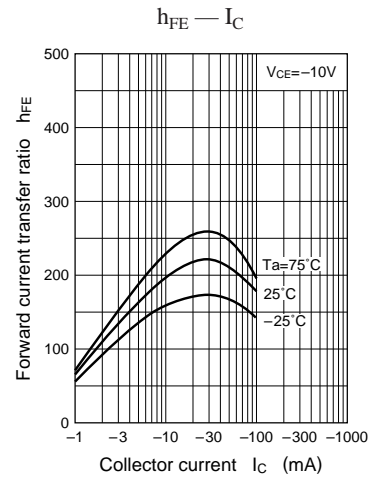
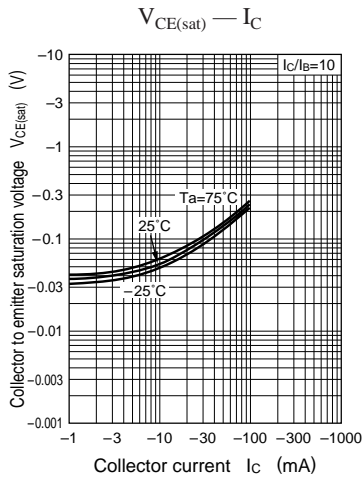
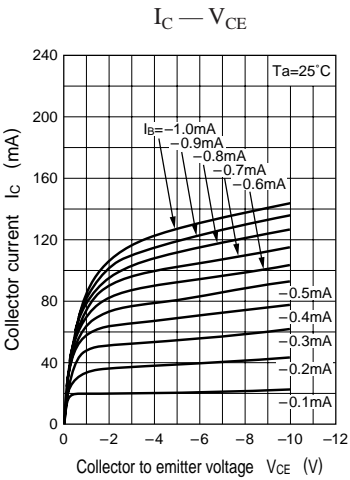


UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z



Characteristics charts of UN211N

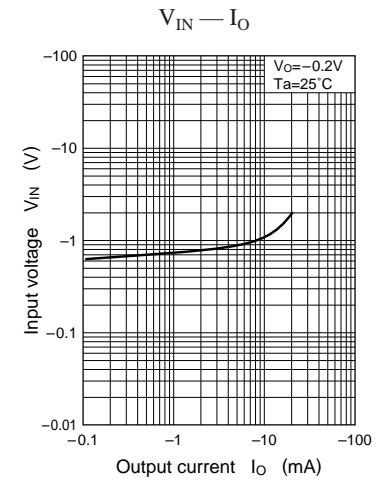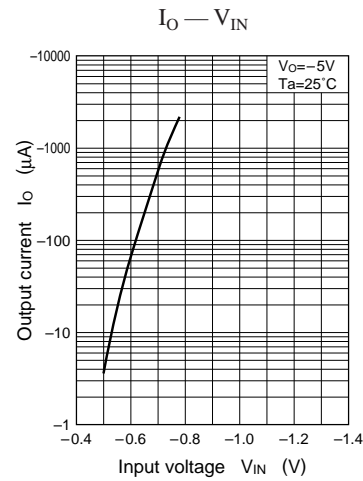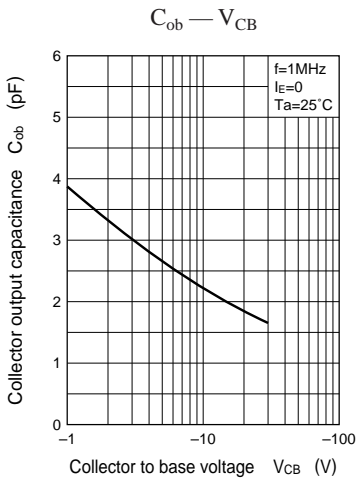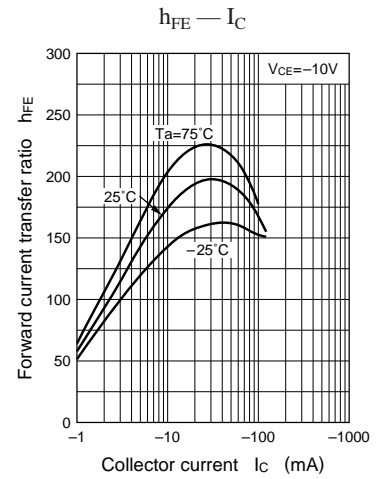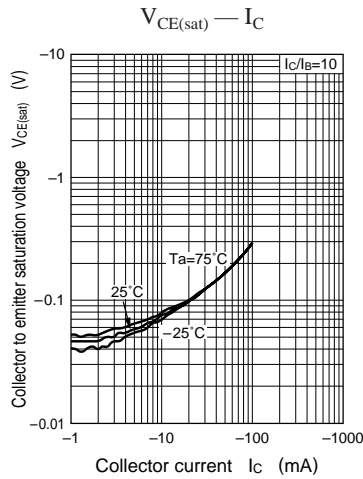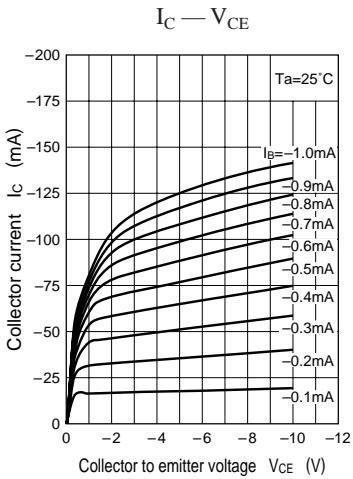






Characteristics charts of UN211T

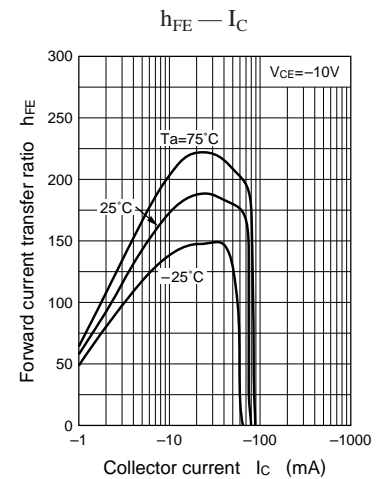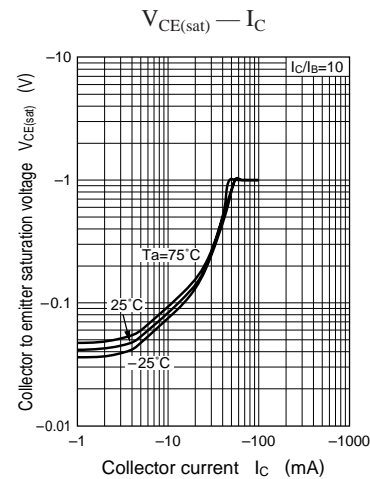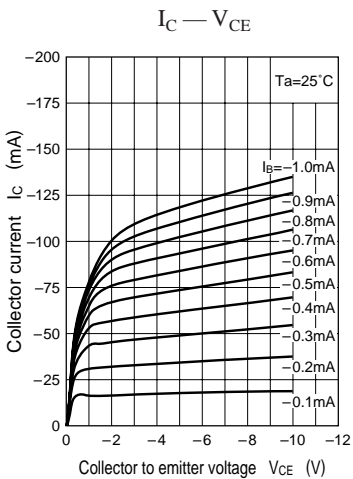

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z

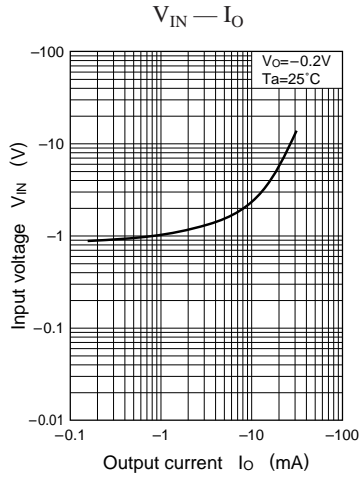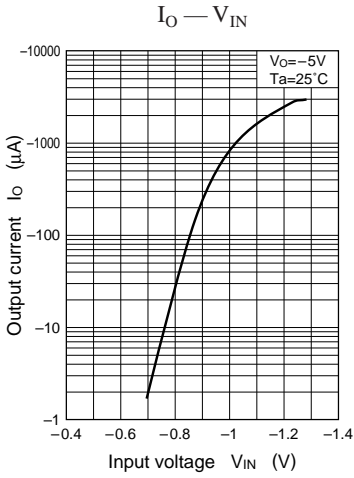

Characteristics charts of UN211V

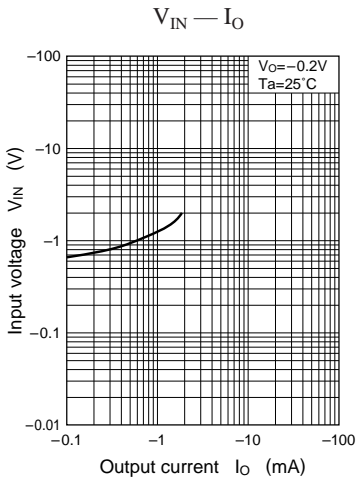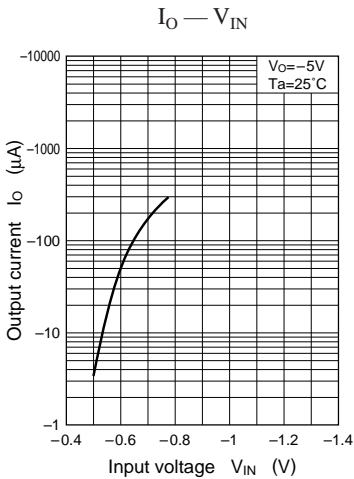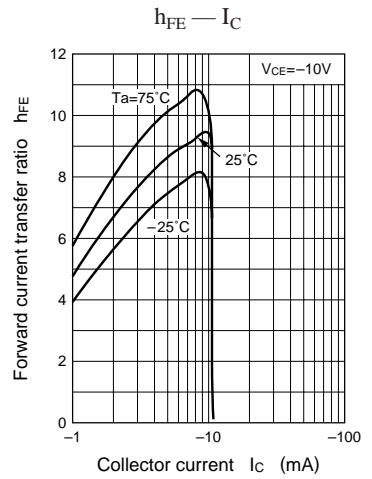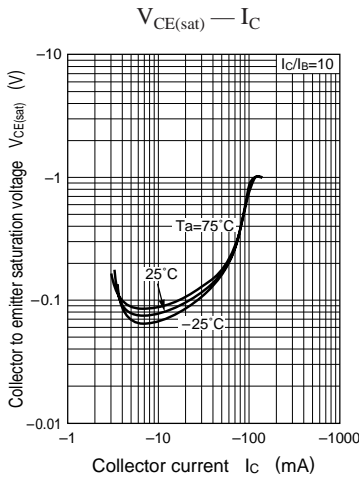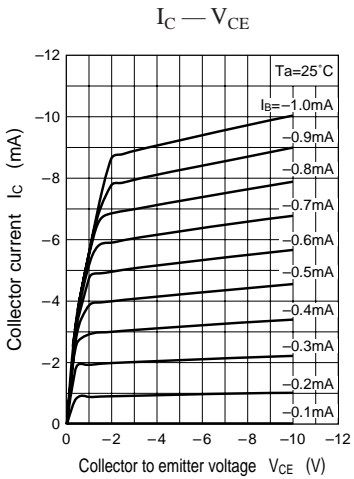

UN2111/2112/2113/2114/2115/2116/2117/2118/2119/2110/
Transistors with built-in Resistor 211D/211E/211F/211H/211L/211M/211N/211T/211V/211Z

Characteristics charts of UN211Z

