



Type: CMD65

◆ Product Description




- $6.2 \times 6.2\text{mm}$ Max. ($L \times W$), 6.2mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.




◆ Feature

- Magnetically unshielded construction.
- Ideally used in Digital video camera, also used as power choke,.
- RoHS Compliance

◆ Dimensions (mm)

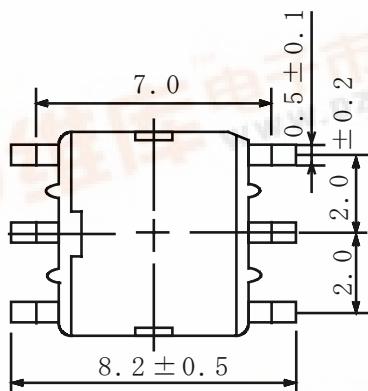


◆ Schematics (Bottom)



“S” is winding start.

◆ Land Pattern (mm)

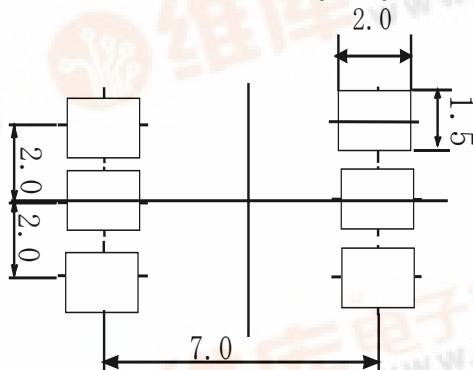

◆ Specification

Sample No.	Inductance (1-3) 1kHz/1V	D.C.R (1-3)	Leakage Inductance (1-3) 100kHz/1V	Rated Current (1-3)
6325-T086	$90\mu\text{H} \pm 10\%$	1.05Ω Max.	$3.0\mu\text{H}$ Max.	0.60A

※ Rated current: The DC current at which the inductance decreases to 90% of its initial value.