



V613ME04

VOLTAGE CONTROLLED OSCILLATOR

Rev A1

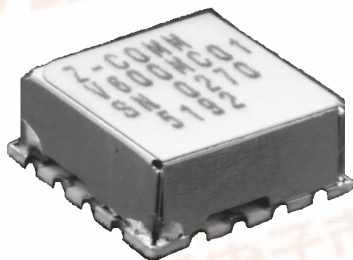

PHASE NOISE (1 Hz BW, typical)

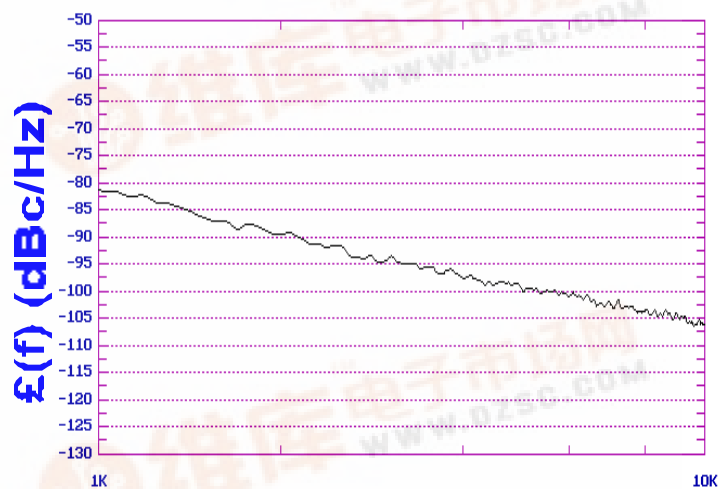

FEATURES

- Frequency Range: 1805 - 1880 MHz
- Tuning Voltage: 1-8 Vdc
- MINI-16 - Style Package

APPLICATIONS

- PCS Handhelds
- Portable Receivers
- Mobile Communications

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	1805 - 1880	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-105	dBc/Hz
Harmonic Suppression (2nd, typ.)	-11	dBc
Tuning Voltage	1-8	Vdc
Tuning Sensitivity (avg.)	21	MHz/V
Power Output	3±3	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<2	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<5	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-16	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	18	mA

All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:


 下载PDF
 pdf.dzsc.com

LOW COST - HIGH PERFORMANCE
VOLTAGE CONTROLLED OSCILLATOR

