



Advanced Analog Technology, Inc.

AAT1103/AAT1103A

Preliminary and provisional

SINGLE-CHANNEL STEP UP DC/DC CONVERTER

Features

- Wide Operating Voltage : 2.5V to 7V
- Low Dissipation Current : Typically 2.0mA
In Operation, 1µA or Less in Shut down Mode
- Power Ready Control
- Output Short Circuit Protection
- Operating Frequency : 800kHz
- Internal Soft Start
- Channel Control
- Minimized External Components

Pin Configuration


General Description

The AAT1103/AAT1103A is a single channel pulse-width-modulation (PWM) controller circuit solution for low voltage applications. A low minimum operating voltage of 2.5V is ideal for the power supply voltage of Li-Ion battery-operated electronic equipment.


The IC provides soft start, short circuit protection and shut down functions. During shut down mode, current consumption is reduced less than 1µA. The error amplifier gain is built in the IC, so external components are minimized. An external compensation pin gives user flexibility in determining loop compensation.

*Spec is subject to change without notice in this document.

TOP VIEW

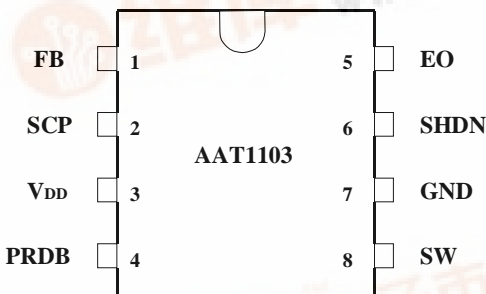

TOP VIEW

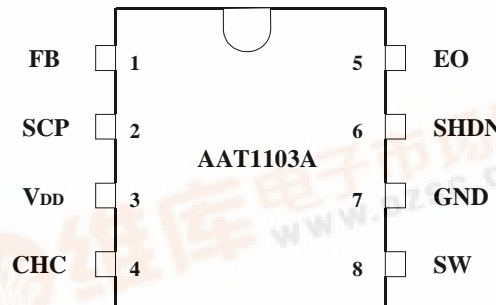

SOP-8 & TSSOP-8

