

ZX3CD2S1M832

MPPS™ Miniature Package Power Solutions 20V PNP LOW SATURATION TRANSISTOR AND 40V, 1A SCHOTTKY DIODE COMBINATION DUAL

SUMMARY

PNP Transistor — $V_{CEO} = -20V$; $R_{SAT} = 64m\Omega$; $I_C = -3.5A$

Schottky Diode — $V_R = 40V$; $V_F = 500mV$ (@1A); $I_C = 1A$

DESCRIPTION

Packaged in the new innovative 3mm x 2mm MLP this combination dual comprises an ultra low saturation PNP transistor and a 1A Schottky barrier diode. This excellent combination provides users with highly efficient performance in applications including DC-DC and charging circuits.

Users will also gain several other **key benefits**:

Performance capability equivalent to much larger packages

Improved circuit efficiency & power levels

PCB area and device placement savings

Lower package height (0.9mm nom)

Reduced component count

FEATURES

- Extremely Low Saturation Voltage (-220mV @-1A)
- H_{FE} characterised up to -6A
- $I_C = -3.5A$ Continuous Collector Current
- Extremely Low V_F , fast switching Schottky
- 3mm x 2mm MLP

APPLICATIONS


- DC - DC Converters
- Mobile Phones
- Charging Circuits
- Motor control

ORDERING INFORMATION


| DEVICE | REEL | TAPE WIDTH | QUANTITY PER REEL |
|----------------|------|------------|-------------------|
| ZX3CD2S1M832TA | 7" | 8mm | 3000 |
| ZX3CD2S1M832TC | 13" | 8mm | 10000 |

DEVICE MARKING


2S1



3mm x 2mm Dual Die MLP

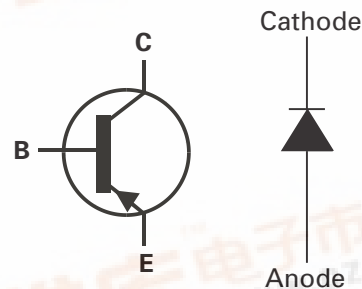

PINOUT



3mm x 2mm Dual MLP underside view

ZX3CD2S1M832

ABSOLUTE MAXIMUM RATINGS.

| PARAMETER | SYMBOL | VALUE | UNIT |
|---|-----------|--------------|------------|
| Transistor | | | |
| Collector-Base Voltage | V_{CBO} | -25 | V |
| Collector-Emitter Voltage | V_{CEO} | -20 | V |
| Emitter-Base Voltage | V_{EBO} | -7.5 | V |
| Peak Pulse Current | I_{CM} | -6 | A |
| Continuous Collector Current (a)(f) | I_C | -3.5 | A |
| Base Current | I_B | 1000 | mA |
| Power Dissipation at TA=25°C (a)(f) Linear Derating Factor | P_D | 1.5 12 | W mW/°C |
| Power Dissipation at TA=25°C (b)(f) Linear Derating Factor | P_D | 2.45 19.6 | W mW/°C |
| Power Dissipation at TA=25°C (c)(f) Linear Derating Factor | P_D | 1 8 | W mW/°C |
| Power Dissipation at TA=25°C (d)(f) Linear Derating Factor | P_D | 1.13 9 | W mW/°C |
| Power Dissipation at TA=25°C (d)(g) Linear Derating Factor | P_D | 1.7 13.6 | W mW/°C |
| Power Dissipation at TA=25°C (e)(g) Linear Derating Factor | P_D | 3 24 | W mW/°C |
| Storage Temperature Range | T_{stg} | -55 to +150 | °C |
| Junction Temperature | T_j | 150 | °C |

THERMAL RESISTANCE


| PARAMETER | SYMBOL | VALUE | UNIT |
|----------------------------|-----------------|-------|------|
| Junction to Ambient (a)(f) | $R_{\theta JA}$ | 83 | °C/W |
| Junction to Ambient (b)(f) | $R_{\theta JA}$ | 51 | °C/W |
| Junction to Ambient (c)(f) | $R_{\theta JA}$ | 125 | °C/W |
| Junction to Ambient (d)(f) | $R_{\theta JA}$ | 111 | °C/W |
| Junction to Ambient (d)(g) | $R_{\theta JA}$ | 73.5 | °C/W |
| Junction to Ambient (e)(g) | $R_{\theta JA}$ | 41.7 | °C/W |

Notes

- (a) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (b) Measured at t<5 secs for a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (c) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with minimal lead connections only**.
- (d) For a dual device surface mounted on 10 sq cm single sided 1oz copper on FR4 PCB, in still air conditions **with all exposed pads attached attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (e) For a dual device surface mounted on 85 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (f) For a dual device with one active die.
- (g) For dual device with 2 active die running at equal power.
- (h) Repetitive rating - pulse width limited by max junction temperature. Refer to Transient Thermal Impedance graph.
- (i) The minimum copper dimensions required for mounting are no smaller than the exposed metal pads on the base of the device as shown in the package dimensions data. The thermal resistance for a dual device mounted on 1.5mm thick FR4 board using minimum copper 1 oz weight, 1mm wide tracks and one half of the device active is $R_{th} = 250^{\circ}C/W$ giving a power rating of $P_{tot} = 500mW$.

ZX3CD2S1M832

TRANSISTOR TYPICAL CHARACTERISTICS

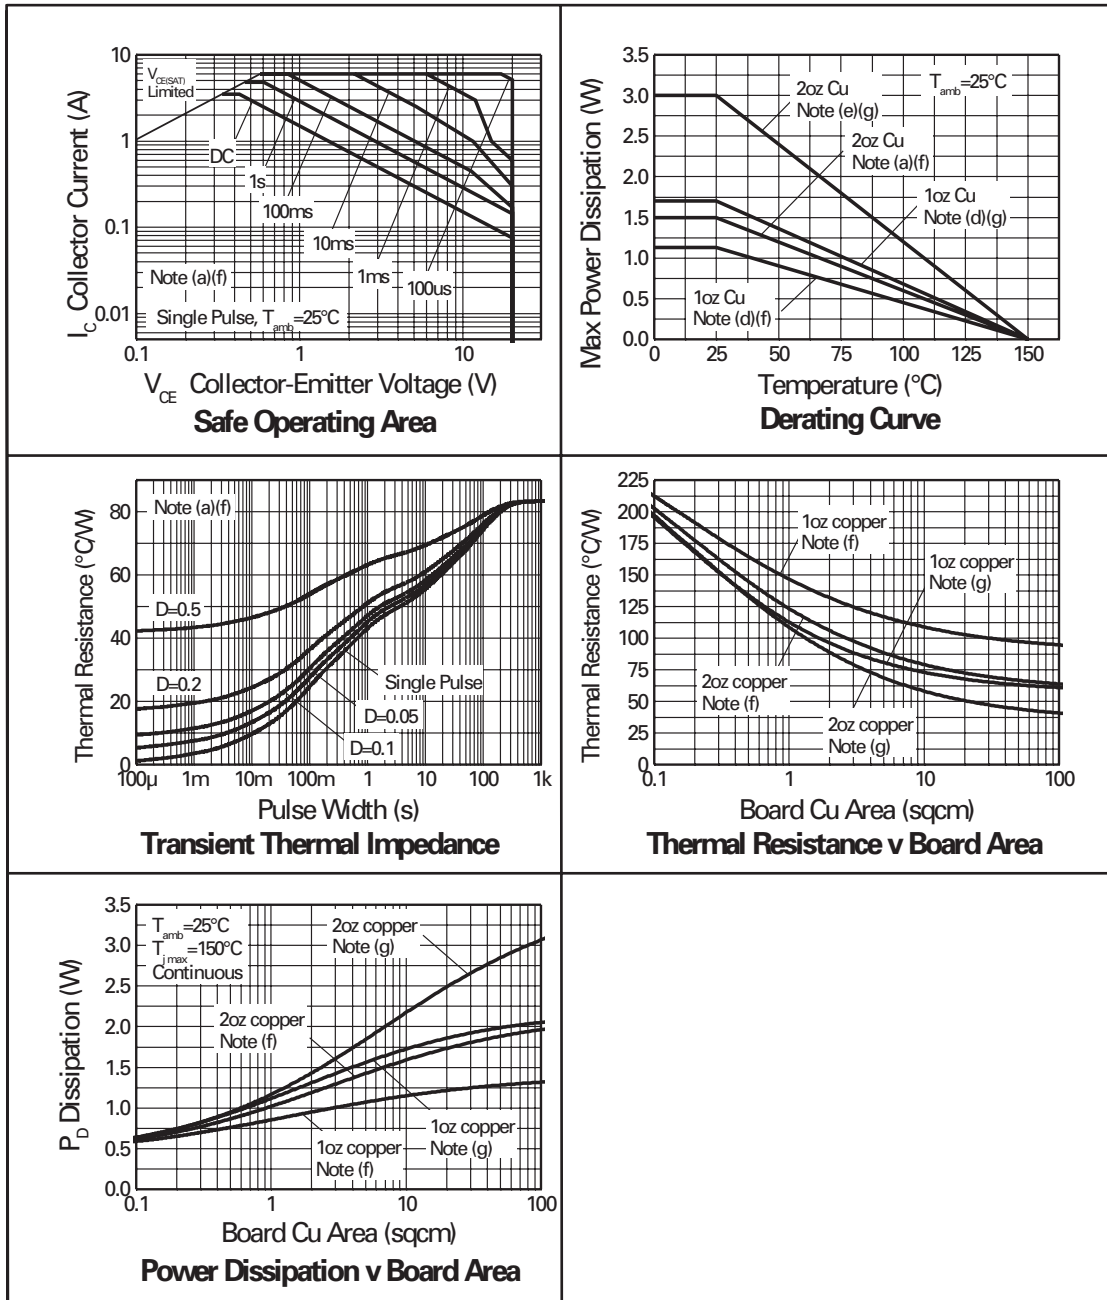

ZX3CD2S1M832

ABSOLUTE MAXIMUM RATINGS.

| PARAMETER | SYMBOL | VALUE | UNIT |
|--|-----------|-------------|----------------------|
| Schottky Diode | | | |
| Continuous Reverse Voltage | V_R | 40 | V |
| Forward Voltage @ $I_F=1000\text{mA}(\text{typ})$ | V_F | 425 | A |
| Forward Current | I_F | 1850 | mA |
| Average Peak Forward Current $D=50\%$ | I_{FAV} | 3 | A |
| Non Repetitive Forward Current $t \leq 100\mu\text{s}$ | I_{FSM} | 12 | A |
| $t \leq 10\text{ms}$ | | 7 | A |
| Power Dissipation at $T_A=25^\circ\text{C}$ (a)(f) | P_D | 1.2 | W |
| Linear Derating Factor | | 12 | mW/ $^\circ\text{C}$ |
| Power Dissipation at $T_A=25^\circ\text{C}$ (b)(f) | P_D | 2 | W |
| Linear Derating Factor | | 20 | mW/ $^\circ\text{C}$ |
| Power Dissipation at $T_A=25^\circ\text{C}$ (c)(f) | P_D | 0.8 | W |
| Linear Derating Factor | | 8 | mW/ $^\circ\text{C}$ |
| Power Dissipation at $T_A=25^\circ\text{C}$ (d)(f) | P_D | 0.9 | W |
| Linear Derating Factor | | 9 | mW/ $^\circ\text{C}$ |
| Power Dissipation at $T_A=25^\circ\text{C}$ (d)(g) | P_D | 1.36 | W |
| Linear Derating Factor | | 13.6 | mW/ $^\circ\text{C}$ |
| Power Dissipation at $T_A=25^\circ\text{C}$ (e)(g) | P_D | 2.4 | W |
| Linear Derating Factor | | 24 | mW/ $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -55 to +150 | $^\circ\text{C}$ |
| Junction Temperature | T_j | 125 | $^\circ\text{C}$ |

THERMAL RESISTANCE


| PARAMETER | SYMBOL | VALUE | UNIT |
|----------------------------|-----------------|-------|---------------------------|
| Junction to Ambient (a)(f) | $R_{\theta JA}$ | 83 | $^\circ\text{C}/\text{W}$ |
| Junction to Ambient (b)(f) | $R_{\theta JA}$ | 51 | $^\circ\text{C}/\text{W}$ |
| Junction to Ambient (c)(f) | $R_{\theta JA}$ | 125 | $^\circ\text{C}/\text{W}$ |
| Junction to Ambient (d)(f) | $R_{\theta JA}$ | 111 | $^\circ\text{C}/\text{W}$ |
| Junction to Ambient (d)(g) | $R_{\theta JA}$ | 73.5 | $^\circ\text{C}/\text{W}$ |
| Junction to Ambient (e)(g) | $R_{\theta JA}$ | 41.7 | $^\circ\text{C}/\text{W}$ |

Notes

- (a) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (b) Measured at $t < 5$ secs for a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (c) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with minimal lead connections only**.
- (d) For a dual device surface mounted on 10 sq cm single sided 1oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (e) For a dual device surface mounted on 85 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.
- (f) For a dual device with one active die.
- (g) For dual device with 2 active die running at equal power.
- (h) Repetitive rating - pulse width limited by max junction temperature. Refer to Transient Thermal Impedance graph.
- (i) The minimum copper dimensions required for mounting are no smaller than the exposed metal pads on the base of the device as shown in the package dimensions data. The thermal resistance for a dual device mounted on 1.5mm thick FR4 board using minimum copper 1 oz weight, 1mm wide tracks and one half of the device active is $R_{th} = 250^\circ\text{C}/\text{W}$ giving a power rating of $P_{tot} = 400\text{mW}$.

ZX3CD2S1M832

SCHOTTKY TYPICAL CHARACTERISTICS

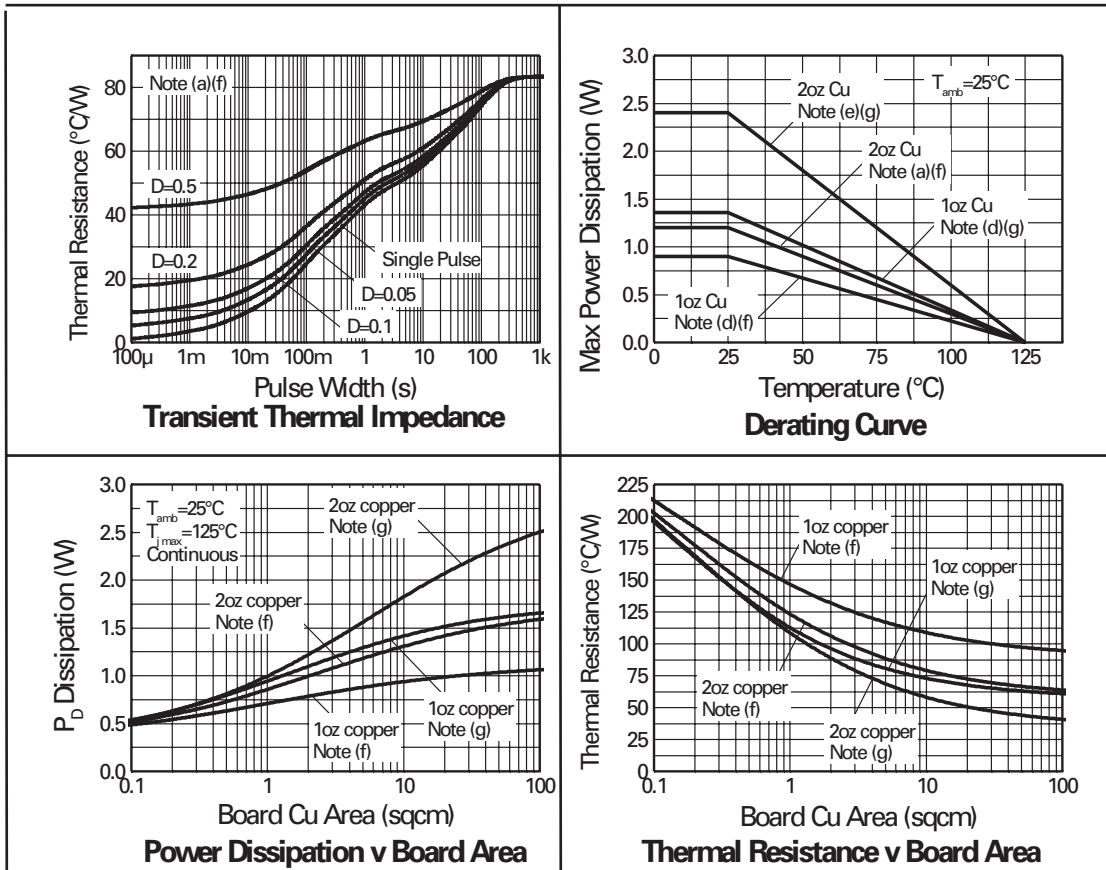

ZX3CD2S1M832


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | CONDITIONS. |
|--|---------------|-------------------------|--|--|---------------|---|
| TRANSISTOR ELECTRICAL CHARACTERISTICS | | | | | | |
| Collector-Base Breakdown Voltage | $V_{(BR)CBO}$ | -25 | -35 | | V | $I_C = -100\mu\text{A}$ |
| Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | -20 | -25 | | V | $I_C = -10\text{mA}^*$ |
| Emitter-Base Breakdown Voltage | $V_{(BR)EBO}$ | -7.5 | -8.5 | | V | $I_E = -100\mu\text{A}$ |
| Collector Cut-Off Current | I_{CBO} | | | -25 | nA | $V_{CB} = -20\text{V}$ |
| Emitter Cut-Off Current | I_{EBO} | | | -25 | nA | $V_{EB} = -6\text{V}$ |
| Collector Emitter Cut-Off Current | I_{CES} | | | -25 | nA | $V_{CES} = -16\text{V}$ |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | | -19 -170 -190 -240 -225 | -30 -220 -250 -350 -300 | mV | $I_C = -0.1\text{A}, I_B = -10\text{mA}^*$ $I_C = -1\text{A}, I_B = -20\text{mA}^*$ $I_C = -1.5\text{A}, I_B = -50\text{mA}^*$ $I_C = -2.5\text{A}, I_B = -150\text{mA}^*$ $I_C = -3.5\text{A}, I_B = -300\text{mA}^*$ |
| Base-Emitter Saturation Voltage | $V_{BE(sat)}$ | | -1.10 | -1.075 | V | $I_C = -3.5\text{A}, I_B = -350\text{mA}^*$ |
| Base-Emitter Turn-On Voltage | $V_{BE(on)}$ | | -0.87 | -0.950 | V | $I_C = -3.5\text{A}, V_{CE} = -2\text{V}^*$ |
| Static Forward Current Transfer Ratio | h_{FE} | 300 300 150 15 | 475 450 230 30 | | | $I_C = -10\text{mA}, V_{CE} = -2\text{V}^*$ $I_C = -0.1\text{A}, V_{CE} = -2\text{V}^*$ $I_C = -2\text{A}, V_{CE} = -2\text{V}^*$ $I_C = -6\text{A}, V_{CE} = -2\text{V}^*$ |
| Transition Frequency | f_T | 150 | 180 | | MHz | $I_C = -50\text{mA}, V_{CE} = -10\text{V}$ $f = 100\text{MHz}$ |
| Output Capacitance | C_{obo} | | 21 | 30 | pF | $V_{CB} = -10\text{V}, f = 1\text{MHz}$ |
| Turn-On Time | $t_{(on)}$ | | 40 | | ns | $V_{CC} = -10\text{V}, I_C = -1\text{A}$ |
| Turn-Off Time | $t_{(off)}$ | | 670 | | ns | $I_{B1} = I_{B2} = -50\text{mA}$ |
| SCHOTTKY DIODE ELECTRICAL CHARACTERISTICS | | | | | | |
| Reverse Breakdown Voltage | $V_{(BR)R}$ | 40 | 60 | | V | $I_R = 300\mu\text{A}$ |
| Forward Voltage | V_F | | 240 265 305 355 390 425 495 420 | 270 290 340 400 450 500 600 — | mV | $I_F = 50\text{mA}^*$ $I_F = 100\text{mA}^*$ $I_F = 250\text{mA}^*$ $I_F = 500\text{mA}^*$ $I_F = 750\text{mA}^*$ $I_F = 1000\text{mA}^*$ $I_F = 1500\text{mA}^*$ $I_F = 1000\text{mA}, T_a = 100^{\circ}\text{C}^*$ |
| Reverse Current | I_R | | 50 | 100 | μA | $V_R = 30\text{V}$ |
| Diode Capacitance | C_D | | 25 | | pF | $f = 1\text{MHz}, V_R = 25\text{V}$ |
| Reverse Recovery Time | t_{rr} | | 12 | | ns | switched from $I_F = 500\text{mA}$ to $I_R = 500\text{mA}$ Measured at $I_R = 50\text{mA}$ |

*Measured under pulsed conditions.


ZX3CD2S1M832

TRANSISTOR TYPICAL CHARACTERISTICS

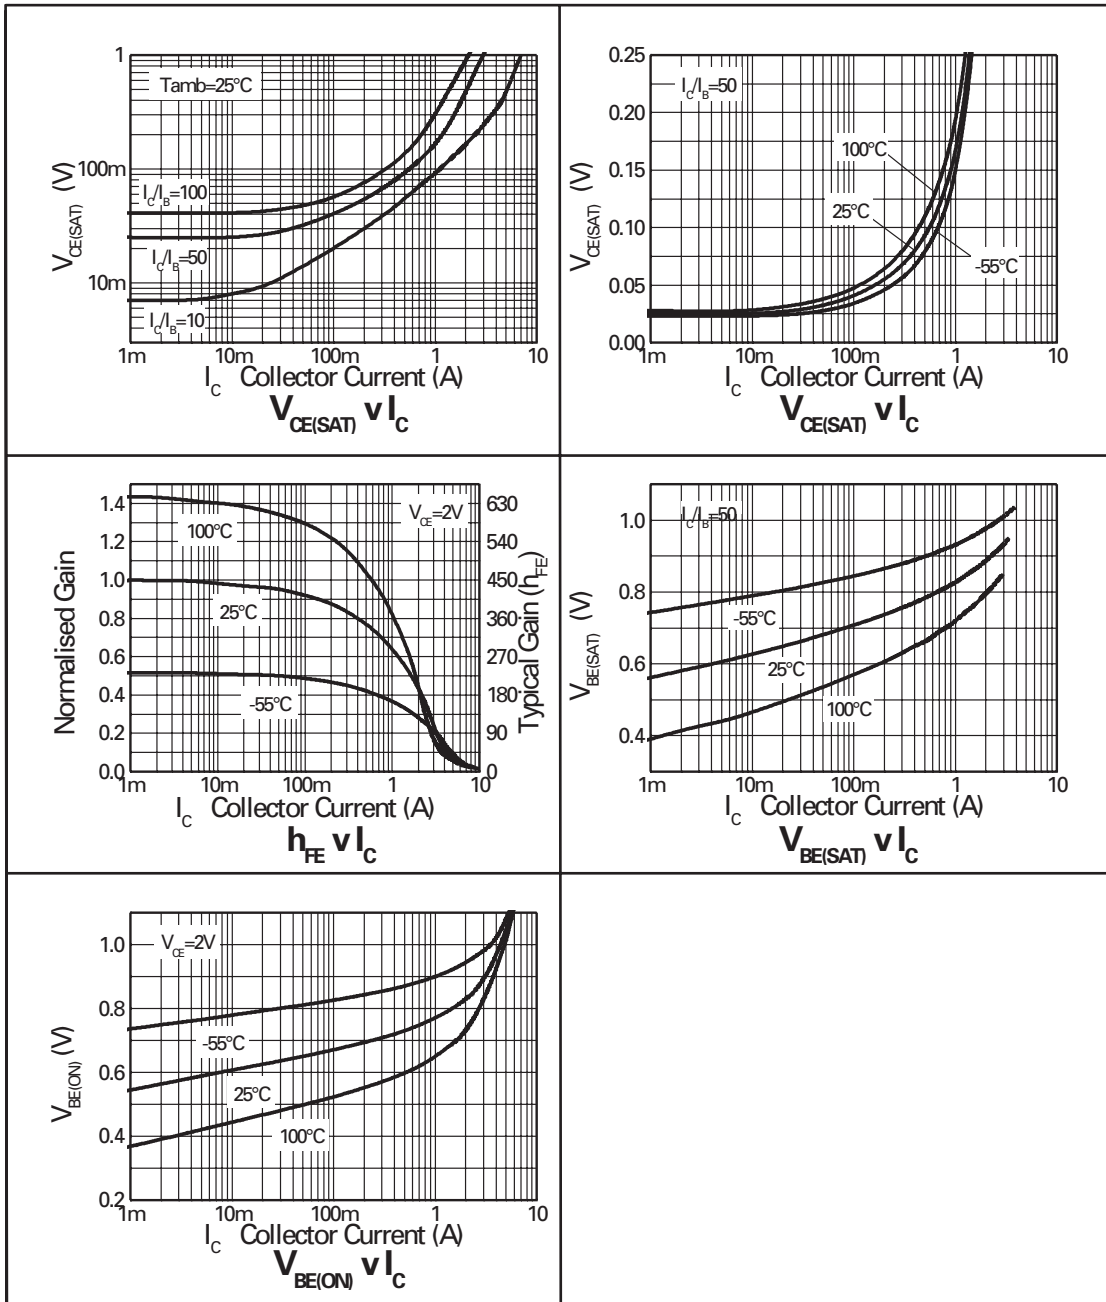


ZX3CD2S1M832

SCHOTTKY TYPICAL CHARACTERISTICS

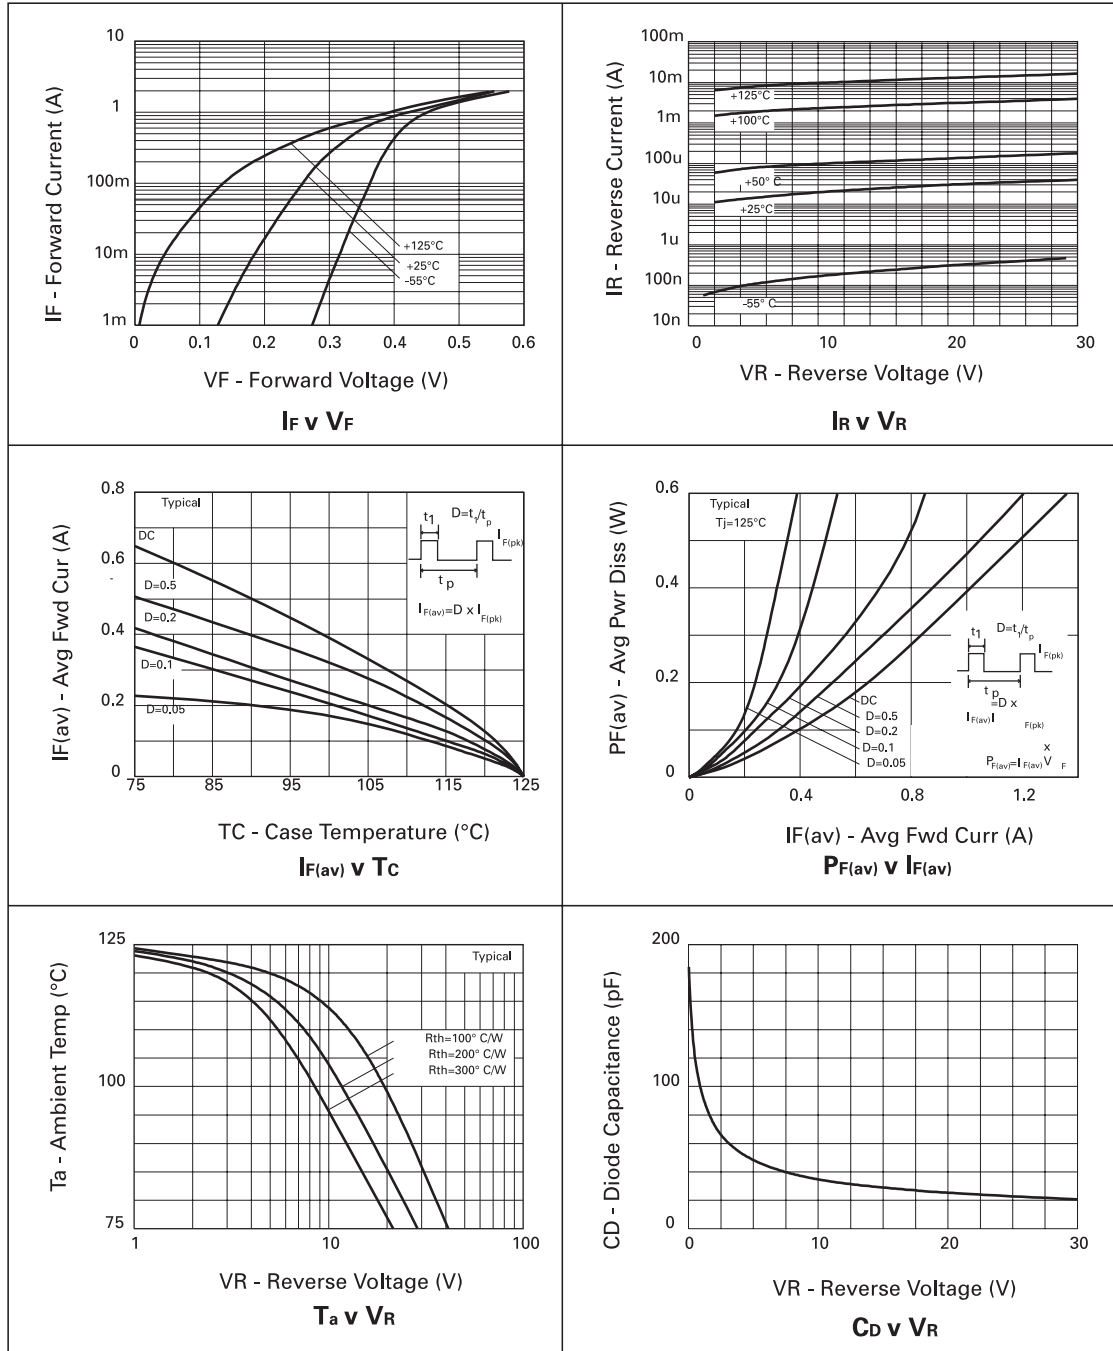

ZX3CD2S1M832

MLP832 PACKAGE OUTLINE (3mm x 2mm Micro Leaded Package)

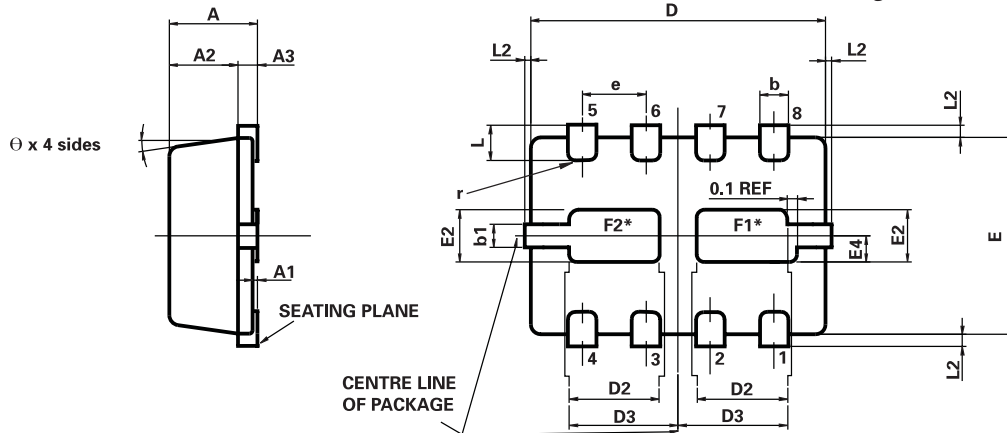

*Exposed Flags. Solder connection to improve thermal dissipation is optional.
 F1 at collector 1 potential
 F2 at collector 2 potential

CONTROLLING DIMENSIONS IN MILLIMETRES
 APPROX. CONVERTED DIMENSIONS IN INCHES

MLP832 PACKAGE DIMENSIONS

| DIM | MILLIMETRES | | INCHES | | DIM | MILLIMETRES | | INCHES | |
|-----|-------------|------|-----------|--------|-----|-------------|-------|------------|--------|
| | MIN. | MAX. | MIN. | MAX. | | MIN. | MAX. | MIN. | MAX. |
| A | 0.80 | 1.00 | 0.031 | 0.039 | e | 0.65 REF | | 0.0256 BSC | |
| A1 | 0.00 | 0.05 | 0.00 | 0.002 | E | 2.00 BSC | | 0.0787 BSC | |
| A2 | 0.65 | 0.75 | 0.0255 | 0.0295 | E2 | 0.43 | 0.63 | 0.017 | 0.0249 |
| A3 | 0.15 | 0.25 | 0.006 | 0.0098 | E4 | 0.16 | 0.36 | 0.006 | 0.014 |
| b | 0.24 | 0.34 | 0.009 | 0.013 | L | 0.20 | 0.45 | 0.0078 | 0.0157 |
| b1 | 0.17 | 0.30 | 0.0066 | 0.0118 | L2 | | 0.125 | 0.00 | 0.005 |
| D | 3.00 BSC | | 0.118 BSC | | r | 0.075 BSC | | 0.0029 BSC | |
| D2 | 0.82 | 1.02 | 0.032 | 0.040 | θ | 0° | 12° | 0° | 12° |
| D3 | 1.01 | 1.21 | 0.0397 | 0.0476 | | | | | |

© Zetex plc 2002

| Europe | Americas | Asia Pacific |
|---|--|---|
| Zetex plc Fields New Road Chadderton Oldham, OL9 8NP United Kingdom Telephone (44) 161 622 4422 Fax: (44) 161 622 4420 uksales@zetex.com | Zetex GmbH Streitfeldstraße 19 D-81673 München Germany Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 europe.sales@zetex.com | Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY11788 USA Telephone: (631) 360 2222 Fax: (631) 360 8222 usa.sales@zetex.com |
| | | Zetex (Asia) Ltd 3701-04 Metroplaza, Tower 1 Hing Fong Road Kwai Fong Hong Kong Telephone: (852) 26100 611 Fax: (852) 24250 494 asia.sales@zetex.com |

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com

ISSUE 1 - JUNE 2002

