

## FEATURES

- RoHS compliant
- Industry standard footprint
- Short circuit protection
- High efficiency
- Under voltage lock out
- Fully adjustable output voltage
- Operating temperature range -40°C to 85°C
- SMD Construction
- UL60950 recognized

## DESCRIPTION

The NNL05 series is part of a range of non-isolated, cost effective DC/DC converters offering high precision output voltages from a nominal 3.0-5.5V or 10.0-14.0V intermediate bus where isolation is not required. Currently available in SMD format and packaged in stackable trays or tape and reel packaging. The product range has been recognized by the Underwriters Laboratory (UL) to UL60950, file number E179522 applies.

## SELECTION GUIDE

Order Code <sup>1</sup>	Input Voltage	Output Voltage	Output Current		User Select Voltage	Efficiency
	V (nom.)	V	Min. Load	Full Load	V <sub>OUT</sub>	% (Min.)
NNL05-9C <sup>2</sup>	4	Adjustable between 0.75 & 3.3	0	5.0	0.75	78
					1.2	83
					1.5	85
					1.8	87
					2.5	90
					3.3	94
NNL05-10C <sup>2</sup>	12	Adjustable between 0.75 & 5.0	0	5.0	0.75	71
					1.2	78
					1.5	80
					1.8	83
					2.5	85
					3.3	87
					5.0	90

**NOT RECOMMENDED FOR NEW DESIGNS**  
 Contact us for replacement model

## INPUT CHARACTERISTICS<sup>1</sup>

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	NNL05-9C V <sub>OUT</sub> < 2.75V	3.0		5.5	V
	NNL05-9C V <sub>OUT</sub> > 3.0V	4.0		5.5	
	NNL05-10C	10.0		14.0	
Under voltage lock out	NNL05-9C	Turn on threshold	2.11		V
		Turn off threshold	1.96		
	NNL05-10C	Turn on threshold	7.85	8.25	
		Turn off threshold	7.75	8.20	
Reflected ripple current	NNL05-9C		12.0		mA p-p
	NNL05-10C		20.0		
Input no load current	NNL05-9C	V <sub>IN</sub> = 5.5V V <sub>OUT</sub> = 0.75V	70		mA
		V <sub>IN</sub> = 5.5V V <sub>OUT</sub> = 3.3V	100		
	NNL05-10C	V <sub>IN</sub> = 12.0V V <sub>OUT</sub> = 0.75V	15		
		V <sub>IN</sub> = 12.0V V <sub>OUT</sub> = 5.0V	75		
Input standby current	Module Disabled		5.0		mA

## OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated current	TA = -40°C to 85°C (see thermal performance characteristics)			5.0	A
Voltage set point accuracy	Using 1% tolerance resistor	-3.0		+2.0	%
Line regulation	Low line to high line	NNL05-9C		1.0	%
		NNL05-10C		0.1	
Load regulation	0% load to 100% load	NNL05-9C		1.0	%
		NNL05-10C		0.2	
Ripple & noise	BW = DC to 20MHz with 1µF ceramic and 10µF tantalum capacitors	NNL05-9C	30		mV p-p
		NNL05-10C 0.75V	9		
		NNL05-10C 5.0V	20		
Transient response	NNL05-9C I <sub>OUT</sub> = 2.5A-5.0A-2.5A	Peak deviation	60		mV
		Settling time	25		µs
	NNL05-10C I <sub>OUT</sub> = 2.5A-5.0A-2.5A	Peak deviation	70		mV
		Settling time	35		µs
Current limit inception			9.0		A

1. If components are required in tape and reel format suffix order code with -R, e.g. NNL05-9C-R.

2. A 330µF low ESR capacitor, approx 17mΩ at 100kHz to 300kHz must be fitted at the input to the NNL DC/DC converter to ensure stability under all the operating conditions.

All specifications typical at T<sub>A</sub> = 25°C, nominal input voltage and rated output current unless otherwise specified.



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

ABSOLUTE MAXIMUM RATINGS		
Short circuit protection		Continuous
Input voltage $V_{IN}$	NNL05-9C	6.0V
	NNL05-10C	15.0V
Trim voltage	NNL05-9C	-0.35V to $V_{OUT}$
	NNL05-10C	-0.3V to $V_{OUT}$
Remote on/off	NNL05-9C	-0.35V to 6.0V
	NNL05-10C	-0.3V to $+V_{OUT}$
Minimum load		0%

GENERAL CHARACTERISTICS <sup>1</sup>					
Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency			300		kHz
Start delay	NNL05-9C		5.0		ms
	NNL05-10C		7.0		
Remote on/off	NNL05-9C	Module on (or pin unconnected)	0	0.5	V
		Module off	2.6	$V_{IN}$	mA
	NNL05-10C	Module on (or pin unconnected)	1.0		V
			0	0.5	mA
		Module off	2.5	$V_{IN}$	V
			0.125	1.0	mA

TEMPERATURE CHARACTERISTICS <sup>1</sup>					
Parameter	Conditions	Min.	Typ.	Max.	Units
Operation	See thermal performance characteristics	-40		85	°C
Storage	Absolute Max. internal temperature	-55		125	°C
Over temperature protection	Operates at substrate temperature	NNL05-9C	110		°C
		NNL05-10C	118		

**OUTPUT VOLTAGE ADJUSTMENT**

The trimming (adjust) input on the device allows output voltage adjustment from 0.75V to 3.3Vdc (NNL05-9C) or 5.0 (NNL05-10C) by using a resistor as shown in fig.1 or by applying a voltage between trim and common pins as shown in fig.2.

To calculate the resistor value for NNL05-9C:

$$R_{TRIM} = \left[ \frac{21070}{V_{OUT} - 0.7525} - 5110 \right] \Omega$$

To calculate the resistor value for NNL05-10C:

$$R_{TRIM} = \left[ \frac{10500}{V_{OUT} - 0.7525} - 1000 \right] \Omega$$


To calculate  $V_{TRIM}$  for NNL05-9C:

$$V_{TRIM} = (0.7 - 0.1698 \times (V_{OUT} - 0.7525))$$


To calculate  $V_{TRIM}$  for NNL05-10C:

$$V_{TRIM} = (0.7 - 0.0667 \times (V_{OUT} - 0.7525))$$

Tables 1 & 2 provide  $R_{TRIM}$  and  $V_{TRIM}$  Values for the most commonly required output voltages.

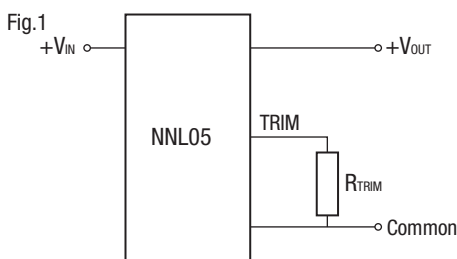

$V_{OUT}$ SET (V)	$R_{TRIM}$ (k $\Omega$ )	$V_{TRIM}$ (V)
0.75	Open	Open
1.2	41.71	0.624
1.5	22.98	0.573
1.8	14.96	0.505
2.5	6.93	0.403
3.3	3.15	0.267

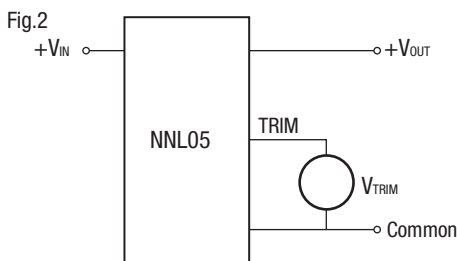


$V_{OUT}$ SET (V)	$R_{TRIM}$ (k $\Omega$ )	$V_{TRIM}$ (V)
0.75	Open	Open
1.2	22.46	0.670
1.5	13.05	0.650
1.8	9.024	0.630
2.5	5.009	0.583
3.3	3.122	0.530
5.0	1.472	0.4166


1. Specifications typical at  $T_A = 25^\circ\text{C}$ , nominal input voltage and rated output current unless otherwise specified.

## EFFICIENCY v LOAD GRAPHS (NNL05-9C)


**V<sub>OUT</sub> = 3.3V**

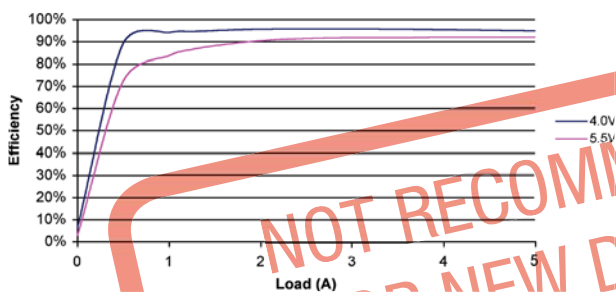


**V<sub>OUT</sub> = 2.5V**

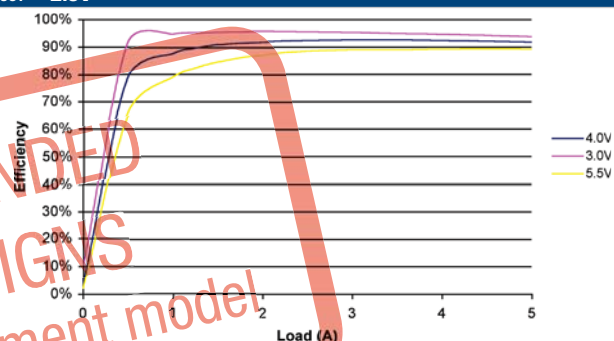


**V<sub>OUT</sub> = 1.8V**

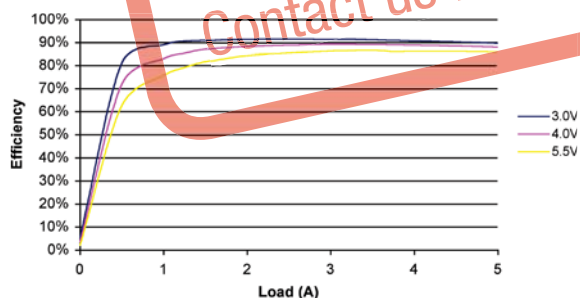


**V<sub>OUT</sub> = 1.5V**

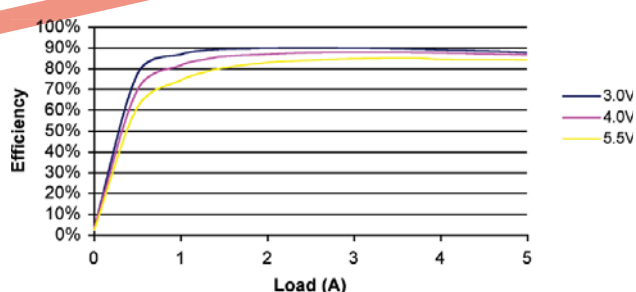

**V<sub>OUT</sub> = 1.2V**

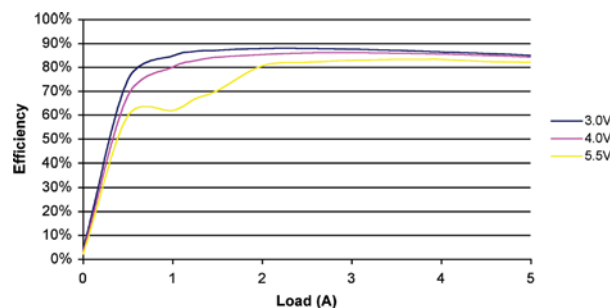


**V<sub>OUT</sub> = 0.75V**

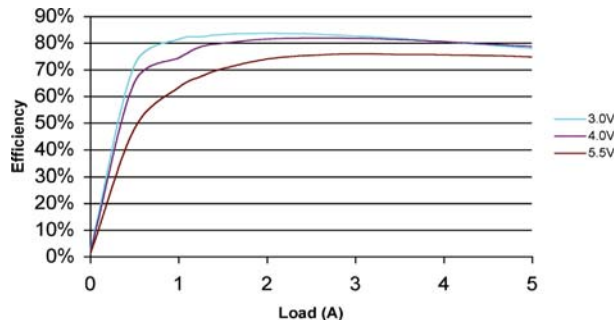


**NOT RECOMMENDED  
FOR NEW DESIGNS**  
 Contact us for replacement model

**EFFICIENCY v LOAD GRAPHS (NNL05-10C)**


**V<sub>OUT</sub> = 5.0V**

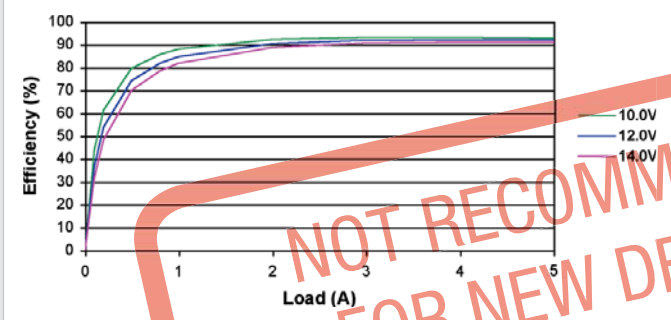


**V<sub>OUT</sub> = 3.3V**

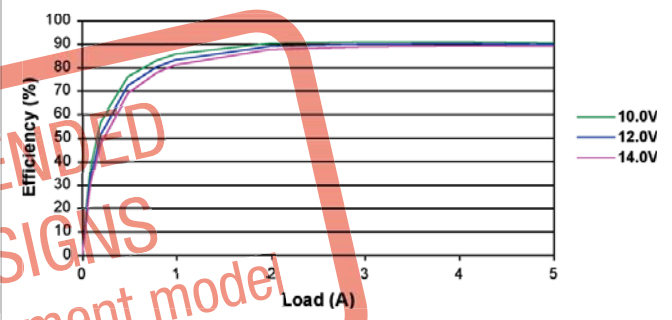


**V<sub>OUT</sub> = 2.5V**

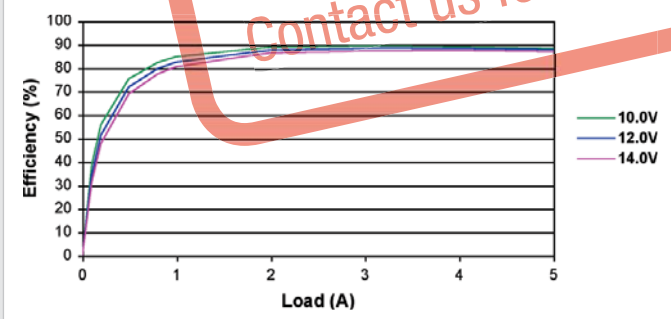


**V<sub>OUT</sub> = 1.8V**

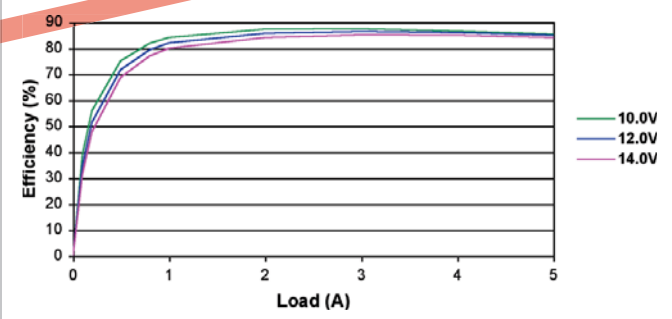


**V<sub>OUT</sub> = 1.5V**

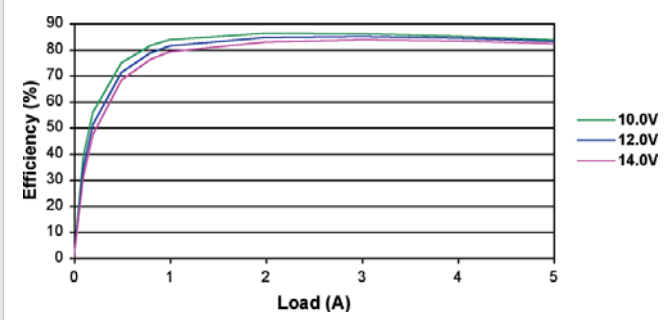

**V<sub>OUT</sub> = 1.2V**






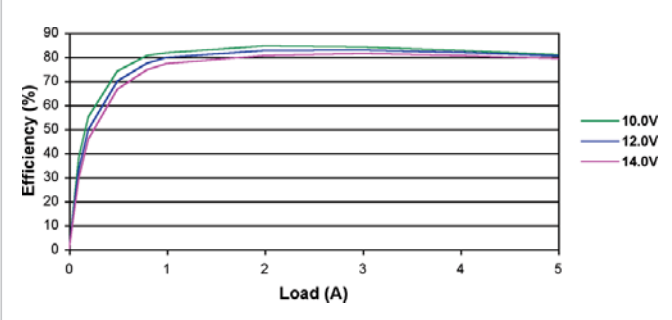


**V<sub>OUT</sub> = 0.75V**

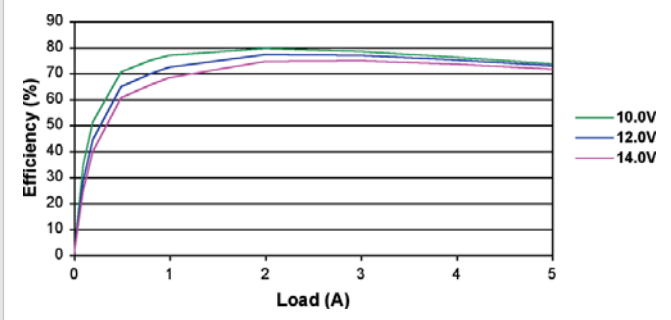

**NOT RECOMMENDED FOR NEW DESIGNS**  
 Contact us for replacement model

**THERMAL DERATING GRAPHS (NNL05-9C)**

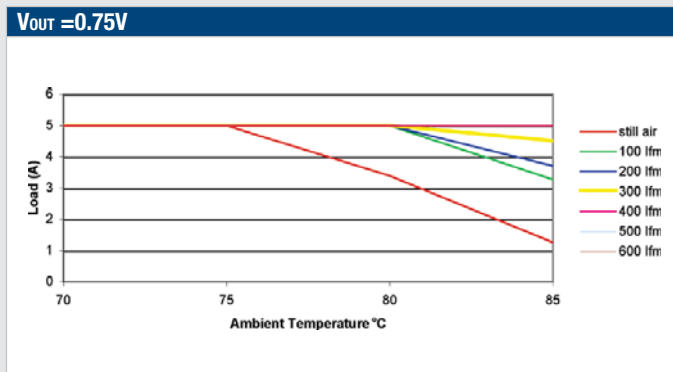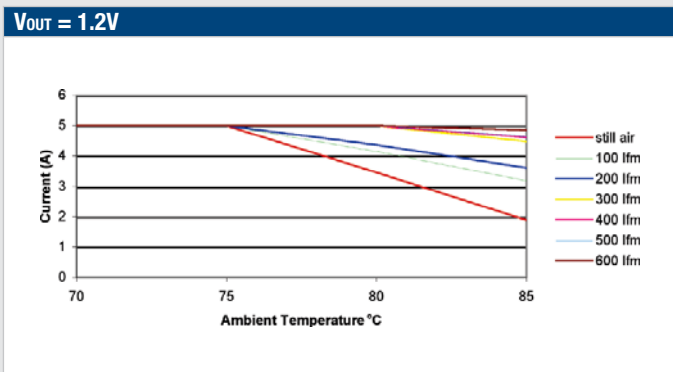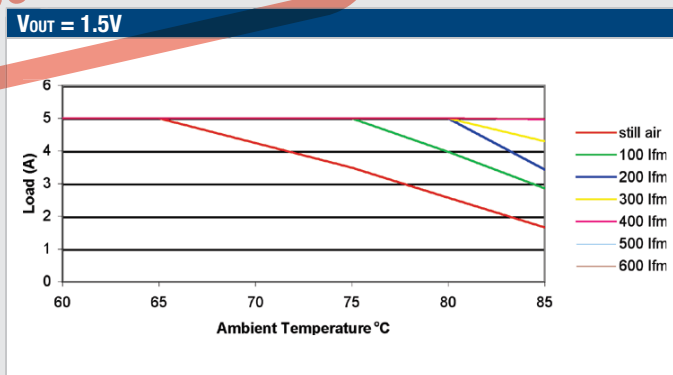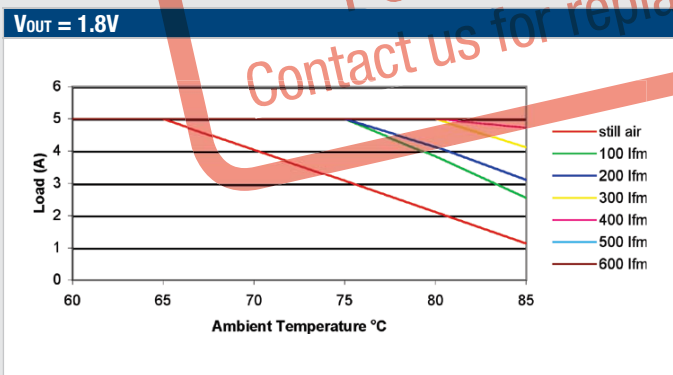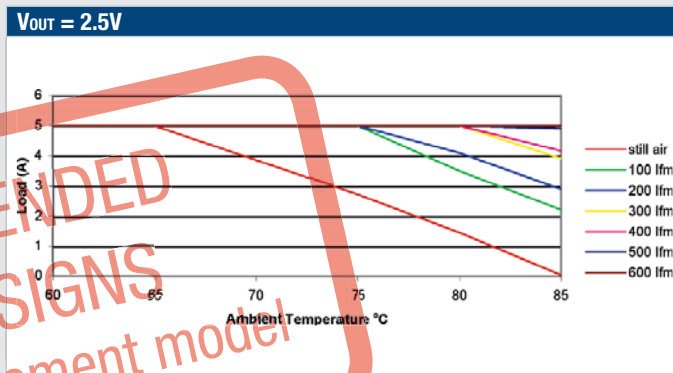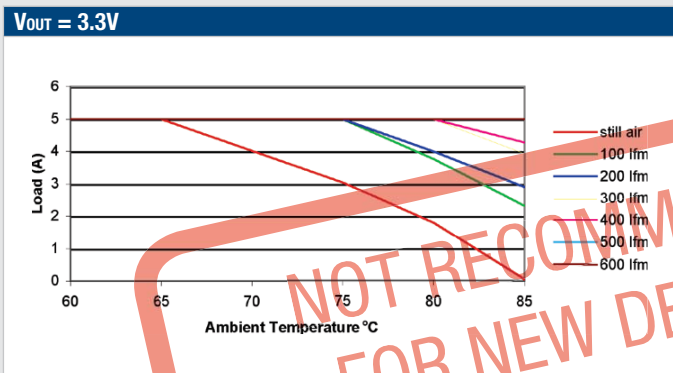


All derating graphs shown are for an input voltage, V<sub>IN</sub> = 5.5V


**NOT RECOMMENDED FOR NEW DESIGNS**  
 Contact us for replacement model

**THERMAL DERATING GRAPHS (NNL05-10C)**


**V<sub>OUT</sub> = 5.0V**

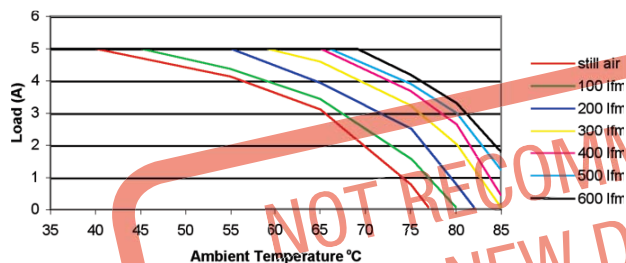


**V<sub>OUT</sub> = 3.3V**

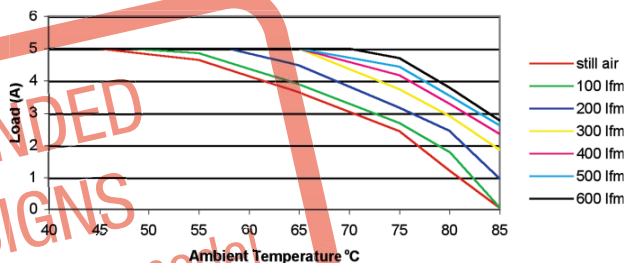


**V<sub>OUT</sub> = 2.5V**

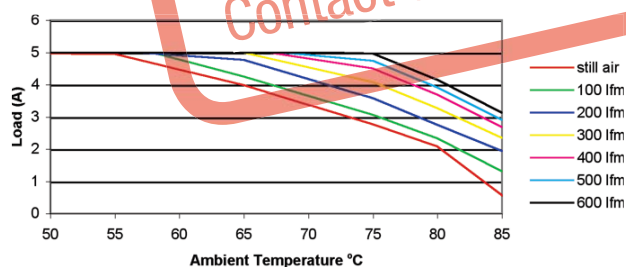


**V<sub>OUT</sub> = 1.8V**

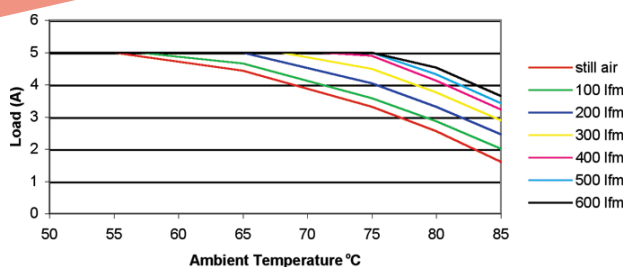


**V<sub>OUT</sub> = 1.5V**

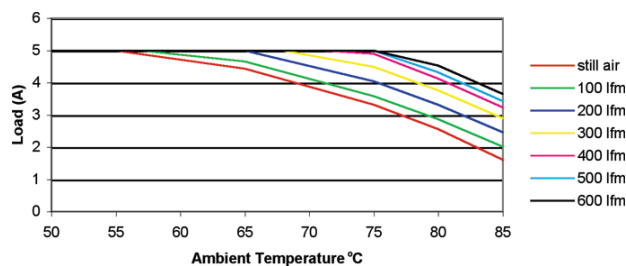

**V<sub>OUT</sub> = 1.2V**

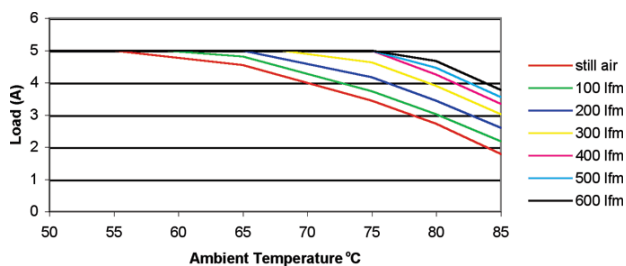

**V<sub>OUT</sub> = 0.75V**

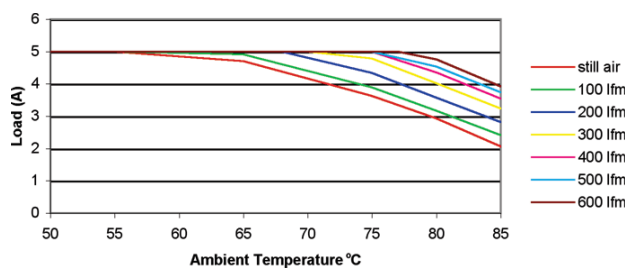


All derating graphs shown are for an input voltage,  $V_{IN} = 14.0V$

**CHARACTERISTIC GRAPHS (NNL05-9C)**


**TYPICAL OUTPUT RIPPLE & NOISE**

$V_{IN} = 5.0VDC$   $V_{OUT} = 3.3V$   $I_{OUT} = 5.0A$

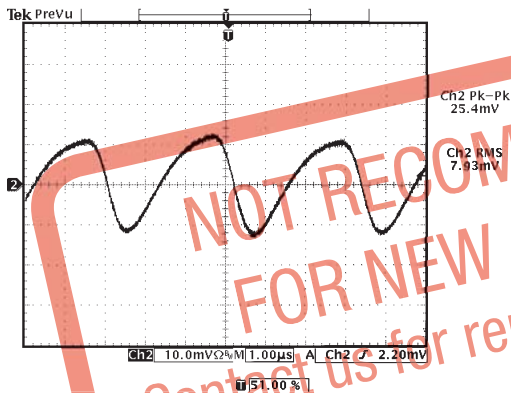


**TYPICAL OUTPUT RIPPLE & NOISE**


$V_{IN} = 5.0VDC$   $V_{OUT} = 0.75V$   $I_{OUT} = 5.0A$

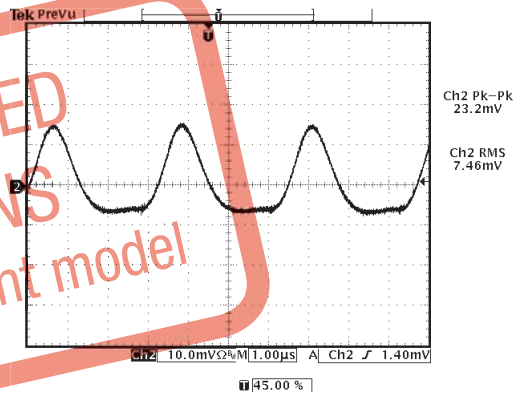

**TYPICAL START-UP FROM APPLICATION OF VIN**

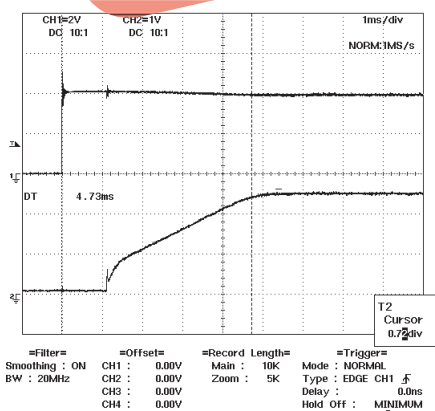

**TYPICAL START-UP USING REMOTE ON/OFF**

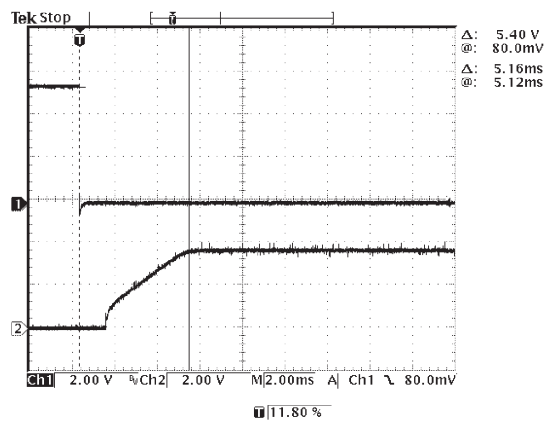

**MTTF**


MTTF figures calculated by MIL-HDBK-217F ground benign. Ambient temperature 25°C, airflow 200LFM.

	Conditions	MTTF (Hrs)
NNL05-9C	$V_{IN} = 5.5V, V_{OUT} = 3.3V$	995057
NNL05-10C	$V_{IN} = 12.0V, V_{OUT} = 5.0V$	420454




**CHARACTERISTIC GRAPHS (NNL05-10C)**


**TYPICAL OUTPUT RIPPLE & NOISE (0.75V OUTPUT)**

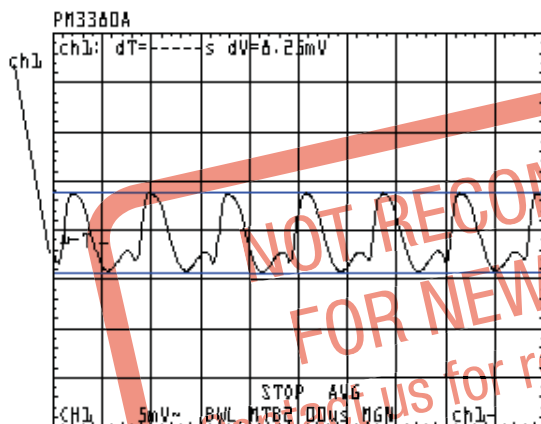


**TYPICAL OUTPUT RIPPLE & NOISE (5.0V OUTPUT)**

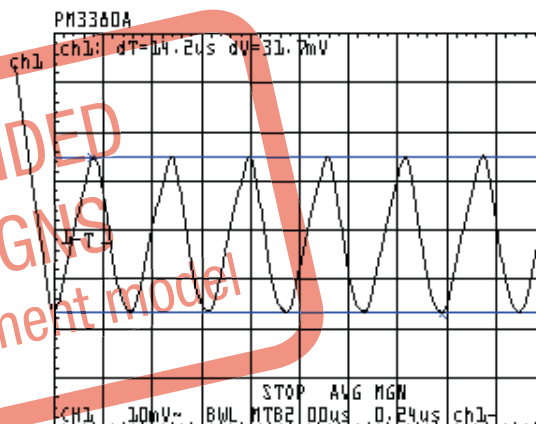

**TYPICAL START-UP FROM APPLICATION OF VIN**

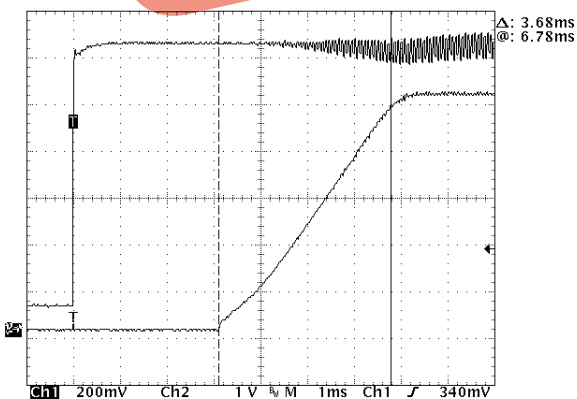

**TYPICAL START-UP USING REMOTE ON/OFF**

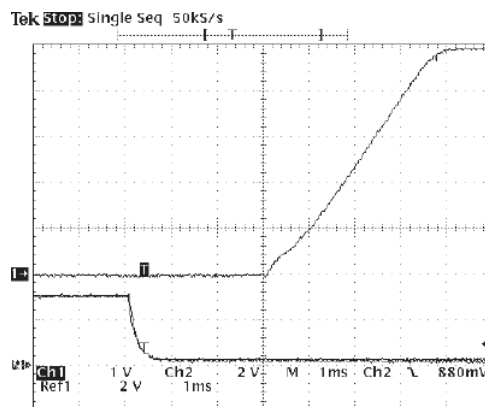

**RoHS COMPLIANCE INFORMATION**




This series is compatible with RoHS soldering systems with a peak reflow solder temperature of 245°C. The pin termination finish on this product series is Matte Tin over Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems. The NNL05-9 has a Moisture Sensitivity Level (MSL) 1. The NNL05-10 has a Moisture Sensitivity Level (MSL) 2.

For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)



**MECHANICAL DIMENSIONS**

SURFACE MOUNT PACKAGE STYLE (BOTTOM VIEW)

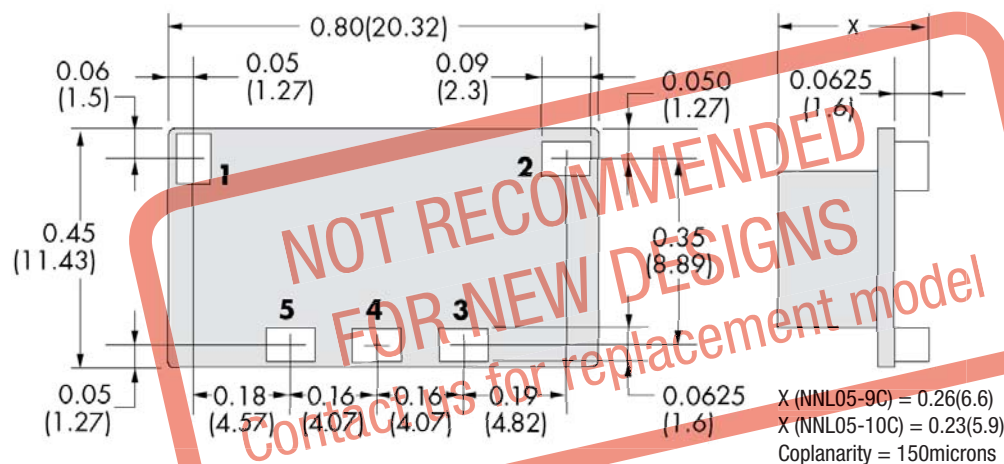


PIN CONNECTIONS

Pin	Function
1	On/Off
2	+VIN
3	Common
4	Trim
5	+VOUT

PACKAGE WEIGHT


NNL05-9C	2.3g
NNL05-10C	2.7g

RECOMMENDED PAD LAYOUT

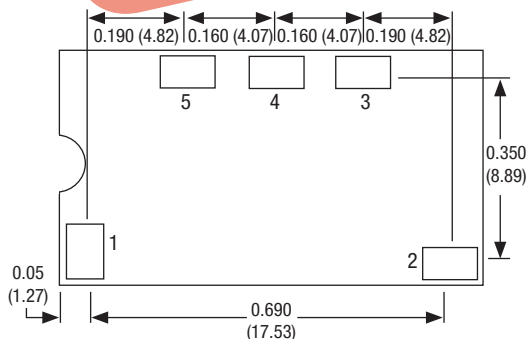


Pad size:  
 MIN: 0.120 x 0.095 (3.048 x 2.413)  
 MAX: 0.135 x 0.110 (3.429 x 2.794)

TRAY DIMENSIONS (TOP VIEW)

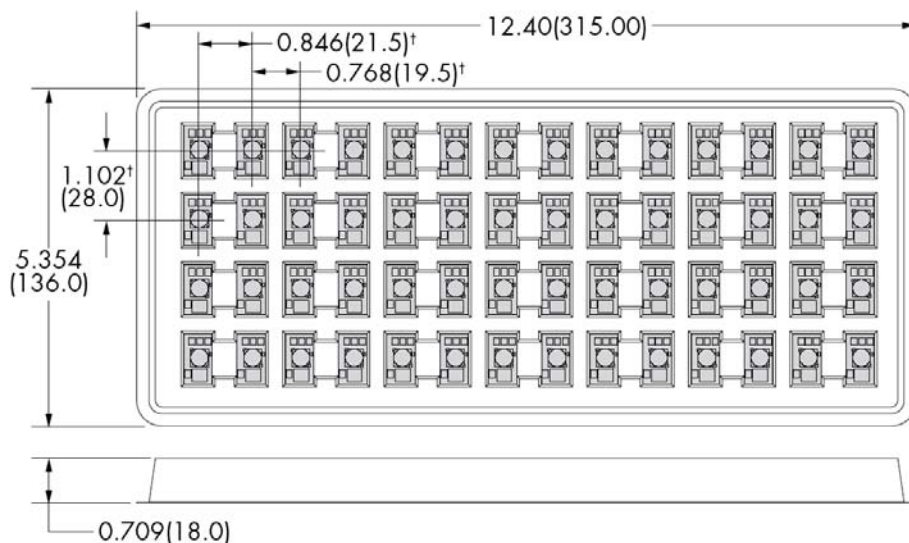


Tray quantity: 56  
 † +0.020(0.5)  
 -0.00(0.0)

PICK-UP POINT NNL05-9




PICK-UP POINT NNL05-10




Unless otherwise stated all dimensions in inches(mm) ±0.01(0.25).

**TAPE & REEL SPECIFICATIONS**

**REEL OUTLINE DIMENSIONS**

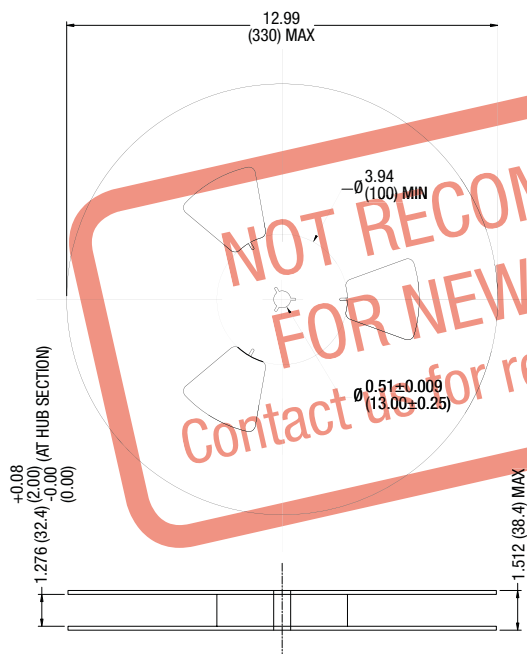


**TAPE OUTLINE DIMENSIONS**

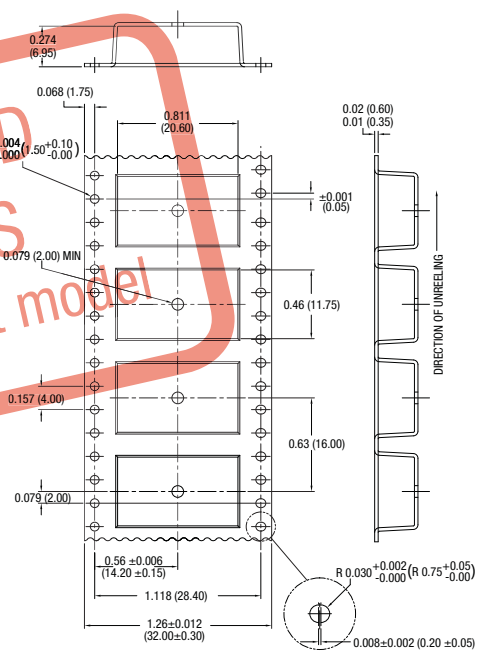

**NOT RECOMMENDED FOR NEW DESIGNS**  
 Contact us for replacement model

**REEL PACKAGING DETAILS**

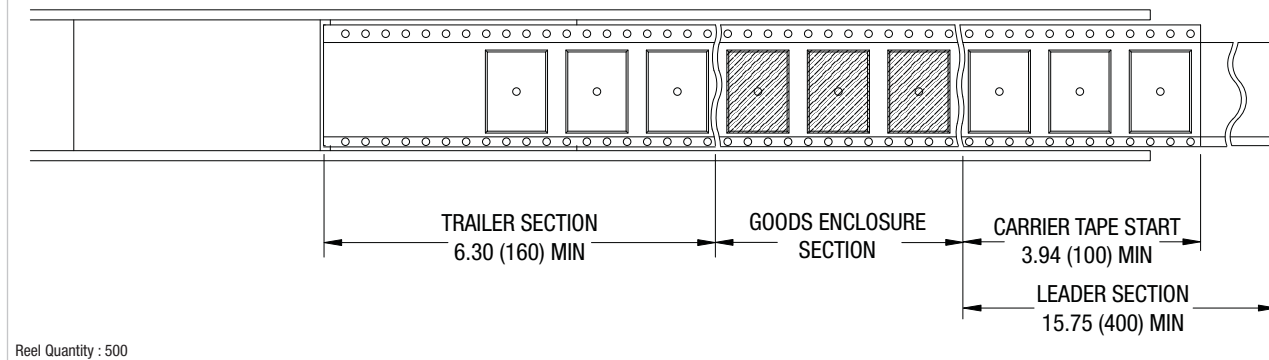

Reel Quantity : 500

Murata Power Solutions, Inc.  
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
 Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356  
**www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED**

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.  
 © 2008 Murata Power Solutions, Inc.

- USA:** Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com
- Canada:** Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
- UK:** Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
- France:** Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
- Germany:** München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com
- Japan:** Tokyo, Tel: 3-3779-1031, email: sales\_tokyo@murata-ps.com  
 Osaka, Tel: 6-6354-2025, email: sales\_osaka@murata-ps.com  
**Website: www.murata-ps.jp**
- China:** Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com  
 Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com