



### Model 4391

### BNC Resistor Attenuator

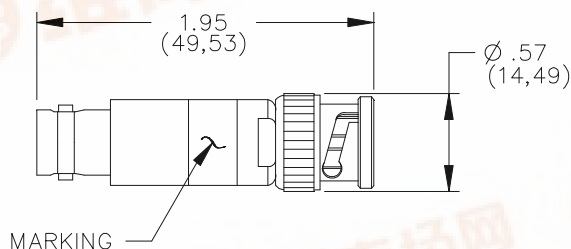

SCHEMATIC

DERATING CURVE

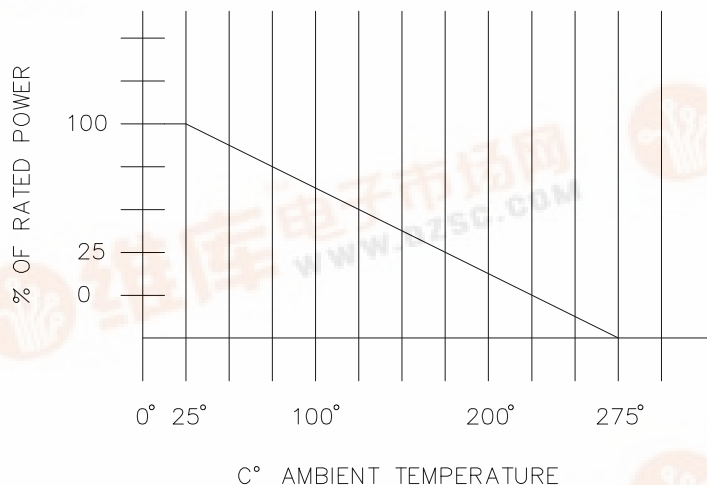

MODEL NUMBER	*RESISTANCE VALUE $\Omega$
4391-50	50
4391-75	75
4391-600	600

#### FEATURES:

- Use to add series resistance to coaxial lines with BNC connectors.

#### MATERIAL:

Body and Fittings: Brass, Alloy 360, 1/2 Hard

Center Contact: Male – Brass, Alloy 360, 1/2 Hard

Female – Beryllium Copper per  
ASTM B196 and B197 Cond. HT

Outer Contact: Beryllium Copper, per ASTM B196  
and B197 Cond. HT

Dielectric: Teflon per ASTM D1457

Gasket/Seals: Silicone rubber per ZZ-R-765, Class  
11, Grade 50

Resistor: Non-inductive film resistor

Finish: Body and Fittings: Tarnish resistant

Center Contact: Male – Gold plated

Outer Contact: Tarnish resistant

Marking: “Pomona 4391-50 2W”

“50 Ohm Attenuator”

#### RATINGS:

Operating Temperature: +102° C (+216° F) Max.

Frequency Range: DC to 500 MHz

Resistance Tolerance  $\pm 1\%$

Power: 2W @ 25° C Max.

#### ORDERING INFORMATION: Model 4391

See table above.

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ " (.51 mm), .xxx =  $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

USA: Sales: 800-490-2361

Fax: 425-446-5844

Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Europe: 31-(0) 40 2675 150

International: 425-446-5500

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)