

HIGH FREQUENCY, CYLINDRICAL TYPE CRYSTALS REFLOWABLE SURFACE MOUNT AB308R and AB310R



8.8 x Ø3.0 mm

FEATURES:



- Miniature High-Frequency crystals.
- Reflow capable.
- Excellent vibration, Shock resistant.

APPLICATIONS:

- Wide range of applications.
- Communications, Measuring instruments.
- Microprocessor clocks.
- Ideal for low cost SMD applications.

STANDARD SPECIFICATIONS

PARAMETERS	AB308R	AB310R
Frequency Range	4.001MHz - 70MHz	3.5MHz-4.000MHz
Operation Mode	4.001MHz - 32.0MHz (Fund.) 30.0MHz - 70.0MHz (3rd OT)	Fundamental
Operating Temperature	-10°C to +60°C (See Options)	
Storage Temperature	-40°C to +85°C	
Frequency Tolerance @ 25°C	±30ppm max. (See Options)	
Frequency Stability over Temp.	±50ppm max. (See Options)	
Equivalent Series Resistance (ESR)	150Ω max. for 4.0MHz ≤ F < 6.0MHz 100Ω max. for 6.0MHz ≤ F < 10.0MHz 50Ω max. for 10.0MHz ≤ F ≤ 32.0MHz	200 Ω max.
Fundamental		
3rd Overtone	100Ω max. for 30.0MHz ≤ F < 36.0MHz 80 Ω max. for 36.0MHz ≤ F ≤ 70.0MHz	
Shunt Capacitance C ₀	5pF max.	
Load Capacitance C _L	16pF typical (See Options)	
Drive Level	100μW max.	
Aging @ 25°C First Year	±5ppm max.	
Insulation Resistance	500M Ω min. at 100Vdc ±15 V	

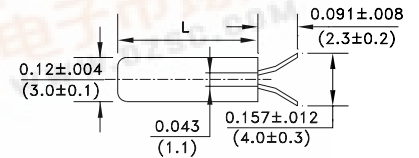

Dimensions: Inches (mm)

Environmental, and mechanical specifications, see appendix C. Group 3.


Tape and Reel, see appendix H.(2,000 pcs/reel)

Marking, see appendix G. Reflow profile, see appendix E.

Application notes, see appendix A. Recommended handling, see appendix F.

ORDERING OPTIONS

ABXXXR - Frequency - CL - ESR - Temperature - Tolerance - Stability - Mode - Packaging

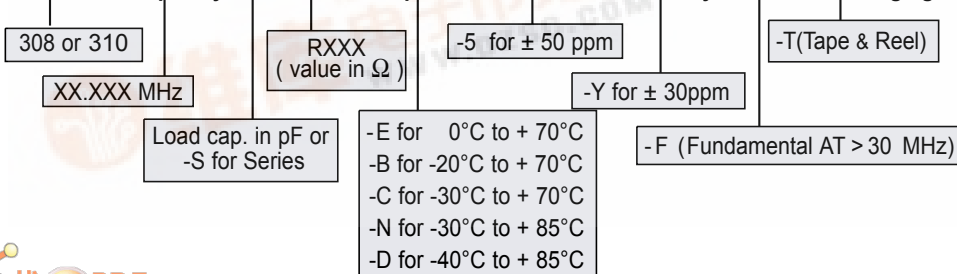

Dim.	AB308R	AB310R
L	0.346±0.012 (8.8±0.3)	0.386±0.008 (9.8±0.2)
A	0.178 (4.5)	0.2 (5.01)
B	0.23 (5.81)	0.25 (6.31)

NOTE: Left blank if standard • All specifications and markings subject to change without notice

29 Journey • Aliso Viejo, CA 92656 • USA

(949) 448-7070 • FAX: (949) 448-8484

E-mail: china@abracon.com • Internet Address: www.abracon.com

