

Table 1-1 Electrical Specification (Ta=25°C)

MEASURING CIRCUIT

[illegible]

查询"FAR-K4SH-36M000-L0E1"供应商


Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
Application	IF Filter for Digital Terrestrial TV (Switchable)		
Picture Carrier Frequency	36.00MHz	DATE	July 07, 2005
FMD Part Number	FAR-K4SH-36M000-L0E1	Version	2.1

Table 1-2 Electrical Specification (Ta=25°C)

Channel 2 (BW=7.4MHz)		Pin No.1=INPUT Pin No.2&3=GROUND			Unit	Remarks
Items	Conditions	Min.	Typ.	Max.		
Insertion Loss	36.00 MHz	18.4	19.9	21.4	dB	
Pass bandwidth	relative attenuation<1.5dB	-	6.72	-	MHz	
	relative attenuation<3.0dB	-	7.17	-	MHz	
	relative attenuation<15dB	-	8.35	-	MHz	
	relative attenuation<30dB	-	9.01	-	MHz	
Relative attenuation	30.75MHz	36	51	-	dB	
	40.25MHz	12.5	17	-	dB	
	40.75MHz	29	42	-	dB	
	41.00MHz	31	45	-	dB	
	41.25MHz	33	44	-	dB	
	25~30.75MHz	36	38	-	dB	
	41.25~45MHz	32	35	-	dB	
Group delay ripple	32.4~39.6MHz	-	56	-	nsp-p	
Impedance at 36MHz	Input kohms//pF	-	1.5//20.8	-		
	Output kohms//pF	-	2.3//5.3	-		
Temperature coefficient		---	-72	---	ppm/°C	

MEASURING CIRCUIT

Characteristics of Channel 2 (switching pin 2 connected to ground)

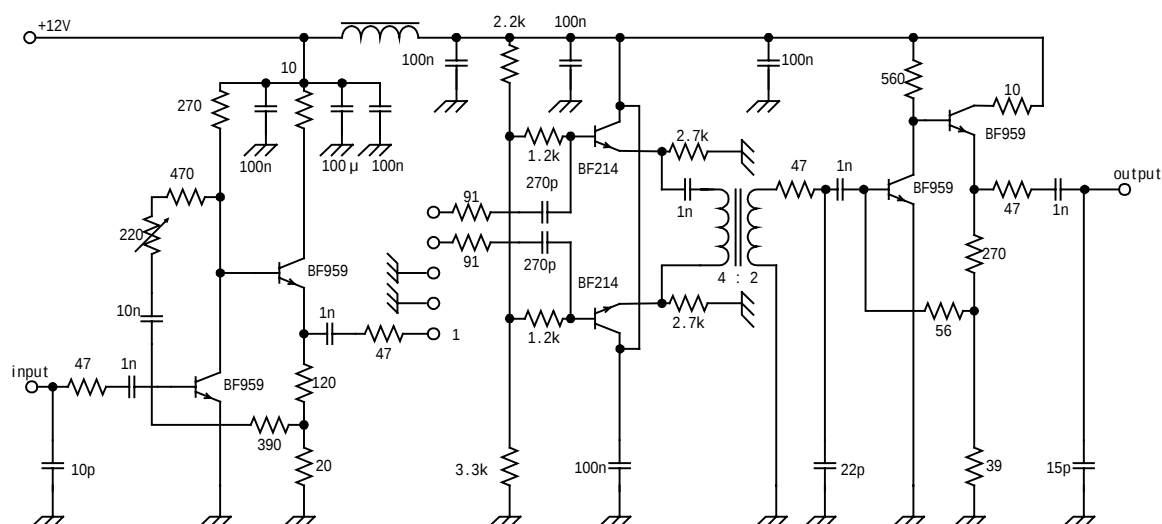

查询"FAR-K4SH-36M000-L0E1"供应商

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
Application	IF Filter for Digital Terrestrial TV (Switchable)		
Picture Carrier Frequency	36.00MHz	DATE	July 07, 2005
FMD Part Number	FAR-K4SH-36M000-L0E1	Version	2.1

● **Dimensions**

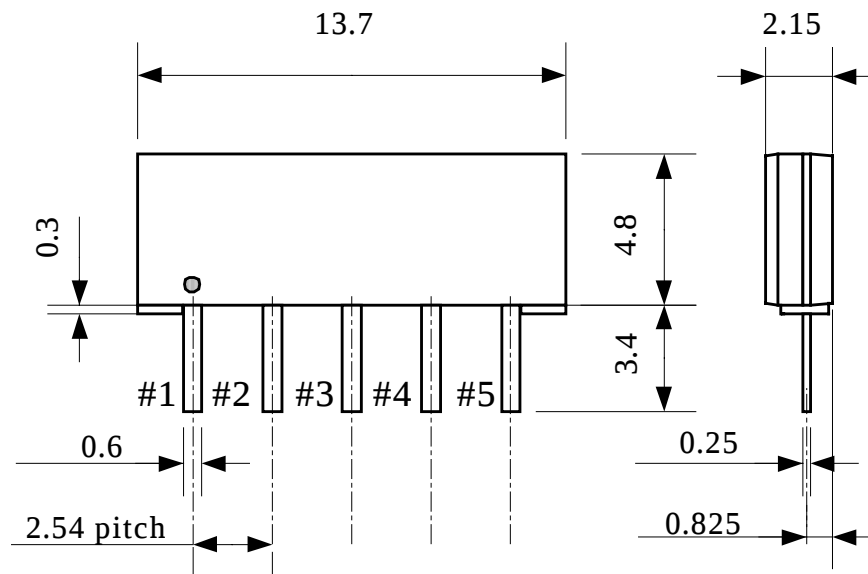


Fig.1

● **Pin Configuration**


Table 2

Pin No.	Symbol	Function
#1	IN	Input
#2	SW	Switching
#3	GND	Ground
#4	OUT	Output
#5	OUT	Output

[查询"FAR-K4SH-36M000-L0E1"供应商](#)

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
Application	IF Filter for Digital Terrestrial TV (Switchable)		
Picture Carrier Frequency	36.00MHz	DATE	July 07, 2005
FMD Part Number	FAR-K4SH-36M000-L0E1	Version	2.1


Amplitude Response [Channel1-BW=6.4MHz] (10dB/div)

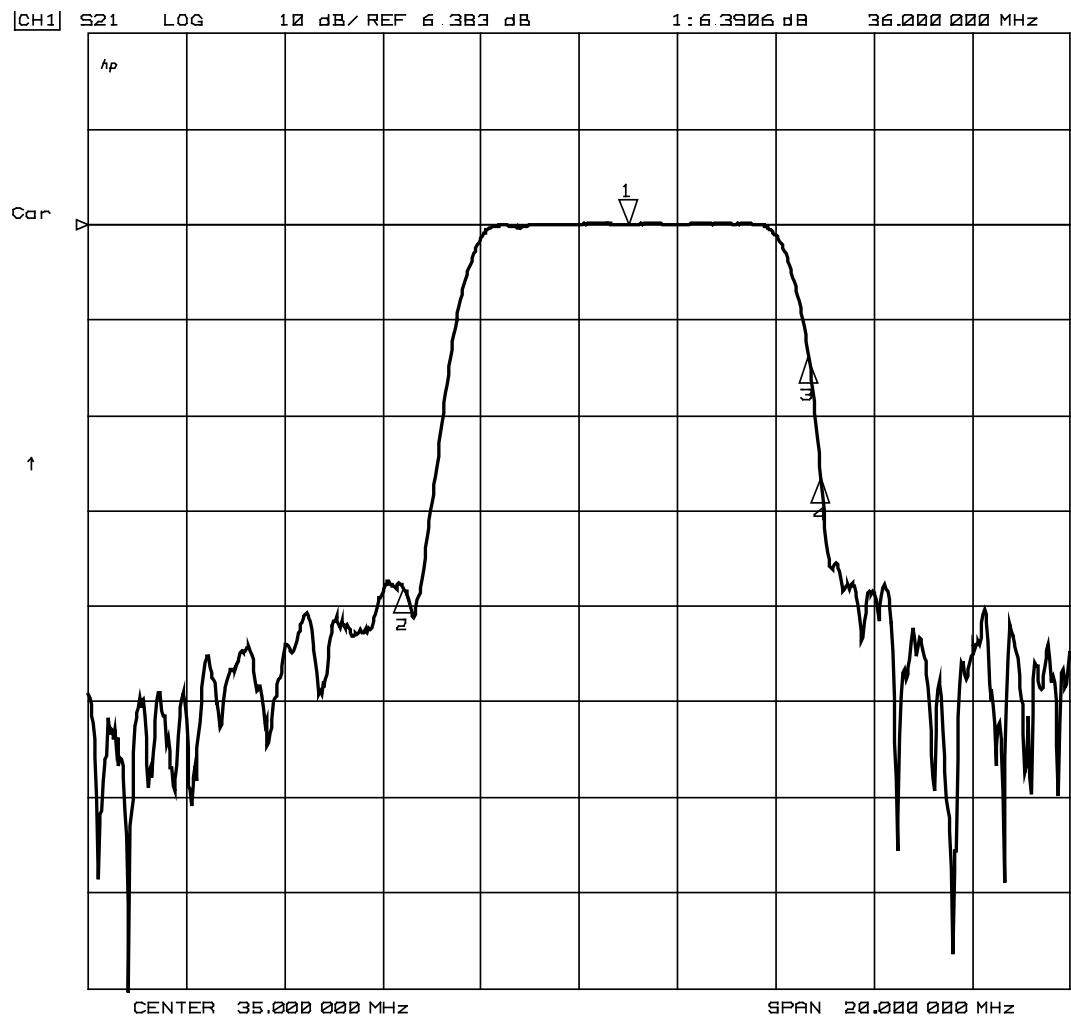

查询"FAR-K4SH-36M000-L0E1"供应商

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
Application	IF Filter for Digital Terrestrial TV (Switchable)		
Picture Carrier Frequency	36.00MHz	DATE	July 07, 2005
FMD Part Number	FAR-K4SH-36M000-L0E1	Version	2.1

Amplitude Response [Channel1-BW=6.4MHz] (1dB/div)

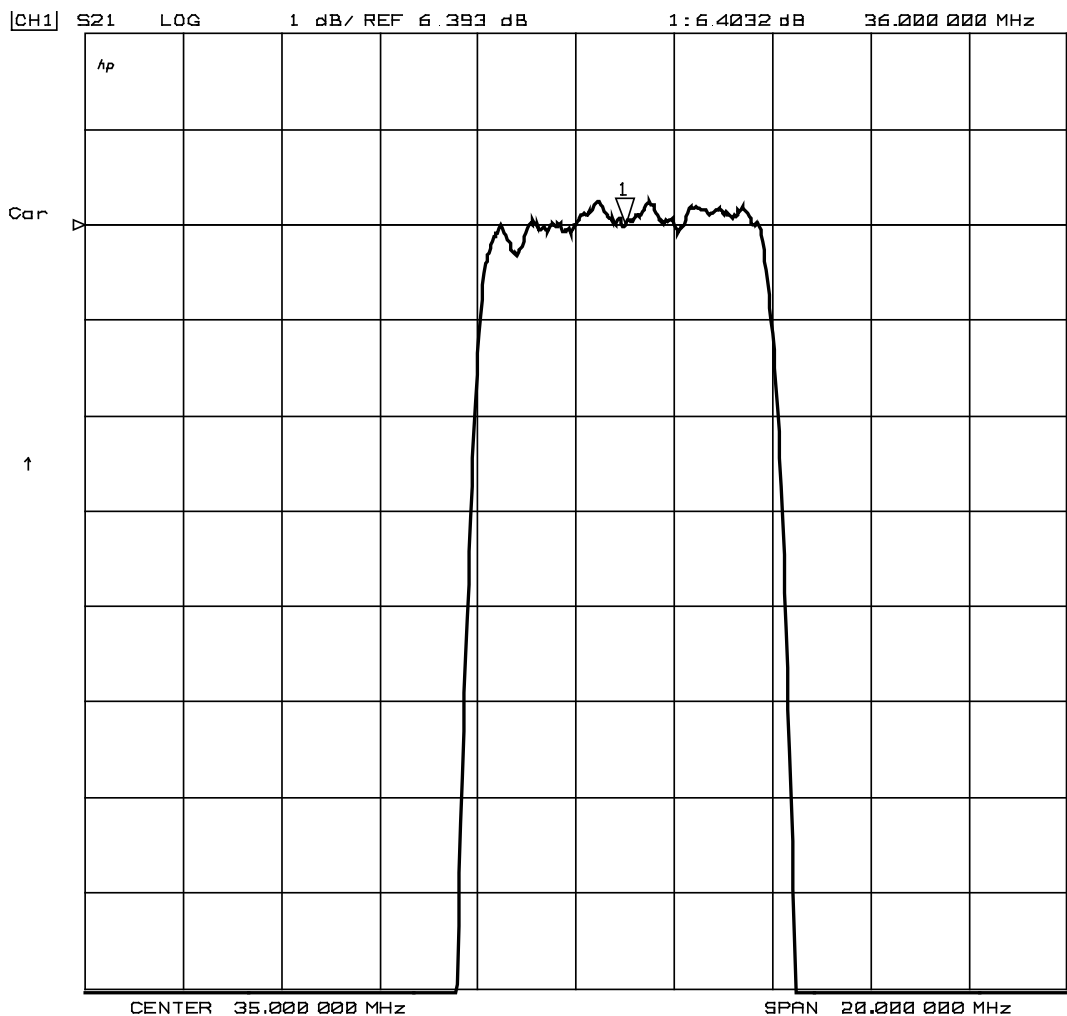


查询"FAR-K4SH-36M000-L0E1"供应商

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
Application	IF Filter for Digital Terrestrial TV (Switchable)		
Picture Carrier Frequency	36.00MHz	DATE	July 07, 2005
FMD Part Number	FAR-K4SH-36M000-L0E1	Version	2.1

Group Delay [Channel1-BW=6.4MHz] (100ns/div)

Delay Aper.=250kHz

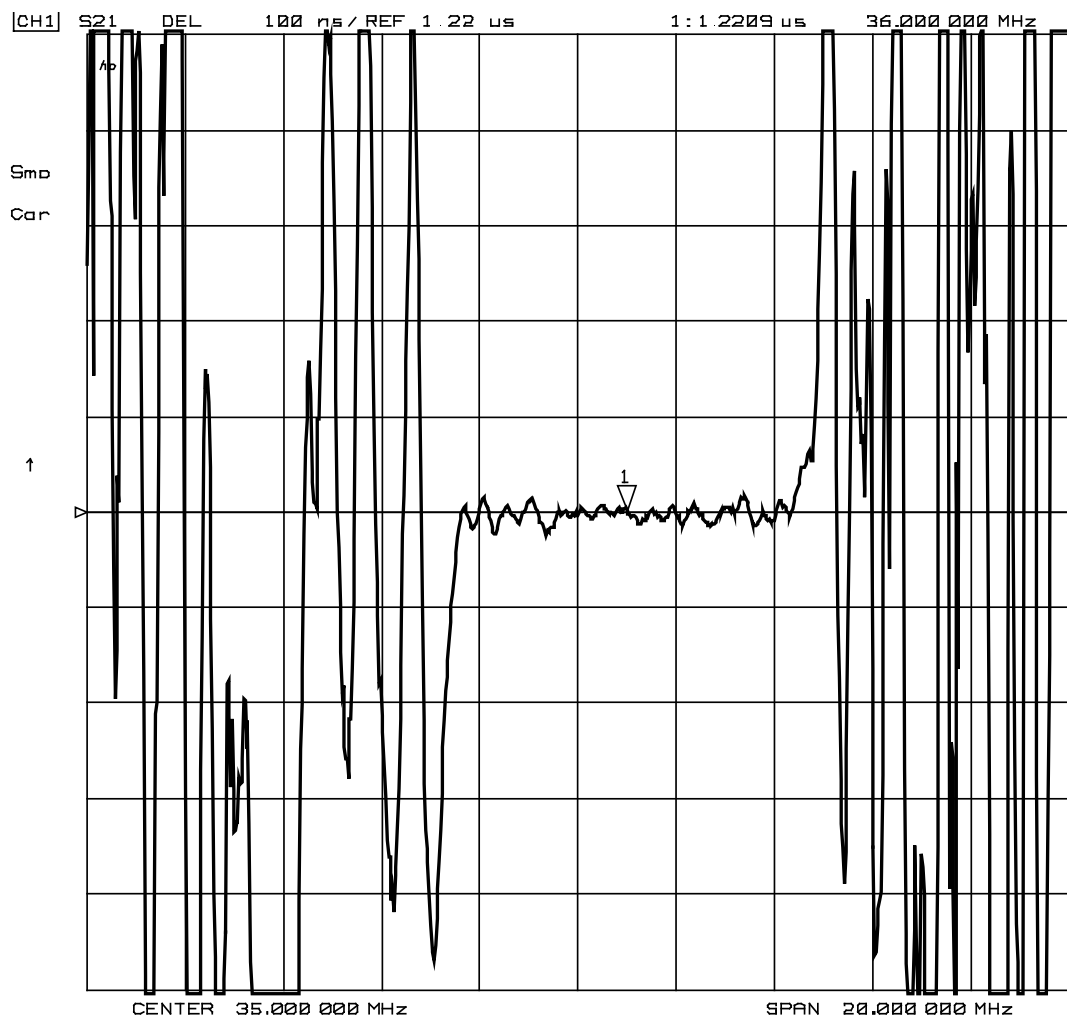


Marker1 : 36.00 MHz

查询"FAR-K4SH-36M000-L0E1"供应商

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
Application	IF Filter for Digital Terrestrial TV (Switchable)		
Picture Carrier Frequency	36.00MHz	DATE	July 07, 2005
FMD Part Number	FAR-K4SH-36M000-L0E1	Version	2.1

Amplitude Response [Channel2-BW=7.4MHz] (10dB/div)

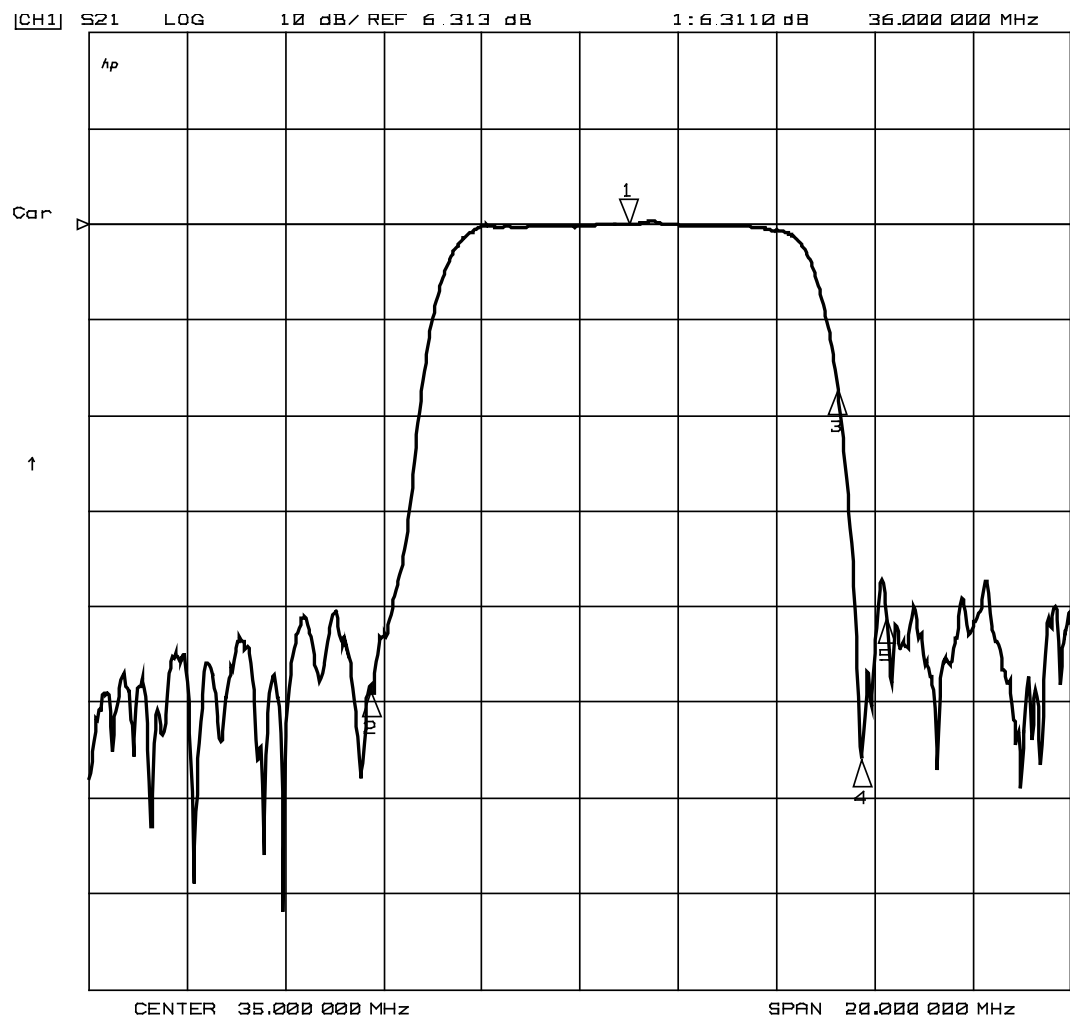


Marker1 : 36.00 MHz
Marker2 : 30.75 MHz
Marker3 : 40.25 MHz
Marker4 : 40.75 MHz
Marker5 : 41.25 MHz

查询"FAR-K4SH-36M000-L0E1"供应商

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
Application	IF Filter for Digital Terrestrial TV (Switchable)		
Picture Carrier Frequency	36.00MHz	DATE	July 07, 2005
FMD Part Number	FAR-K4SH-36M000-L0E1	Version	2.1

Amplitude Response [Channel2-BW=7.4MHz] (1dB/div)

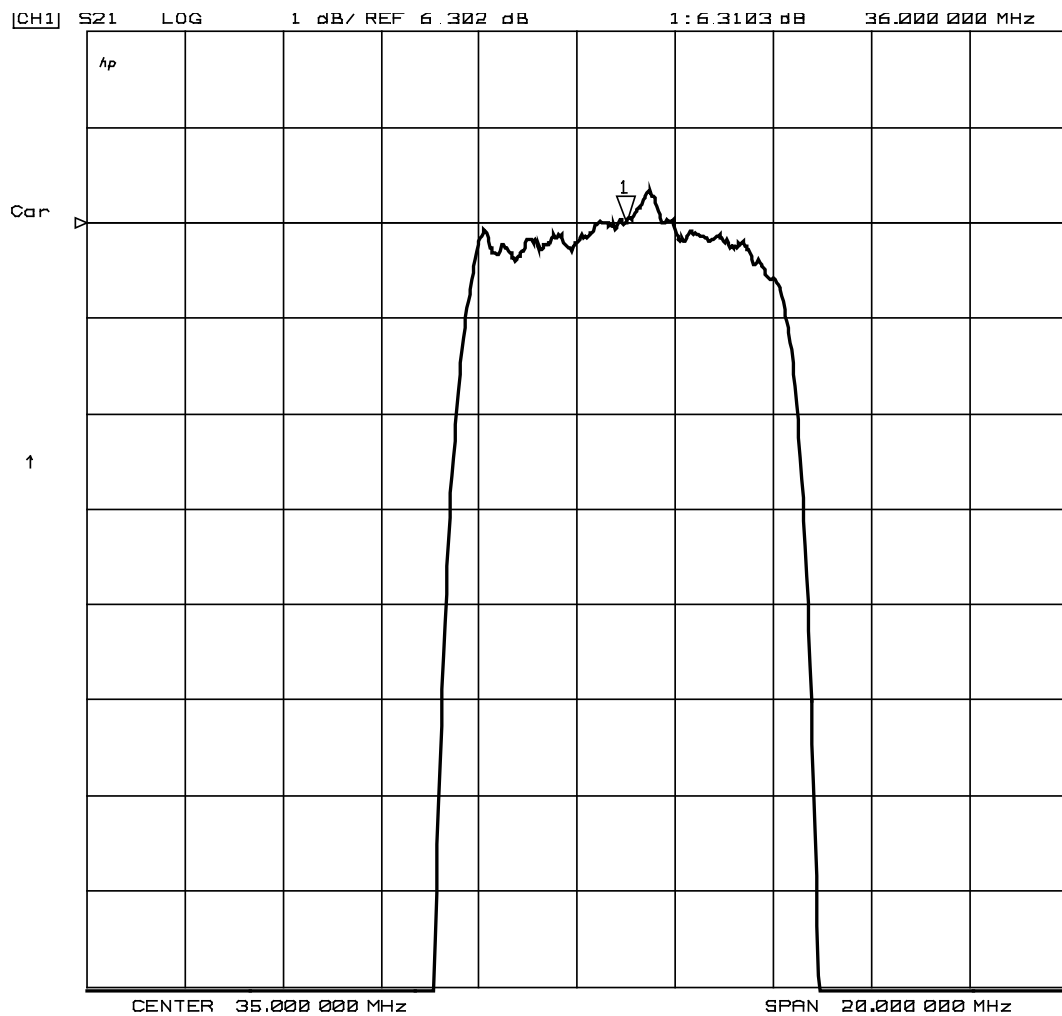


Marker1 : 36.00 MHz

查询"FAR-K4SH-36M000-L0E1"供应商

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
Application	IF Filter for Digital Terrestrial TV (Switchable)		
Picture Carrier Frequency	36.00MHz	DATE	July 07, 2005
FMD Part Number	FAR-K4SH-36M000-L0E1	Version	2.1

Group Delay [Channel2-BW=7.4MHz] (100ns/div)

Delay Aper. = 250kHz

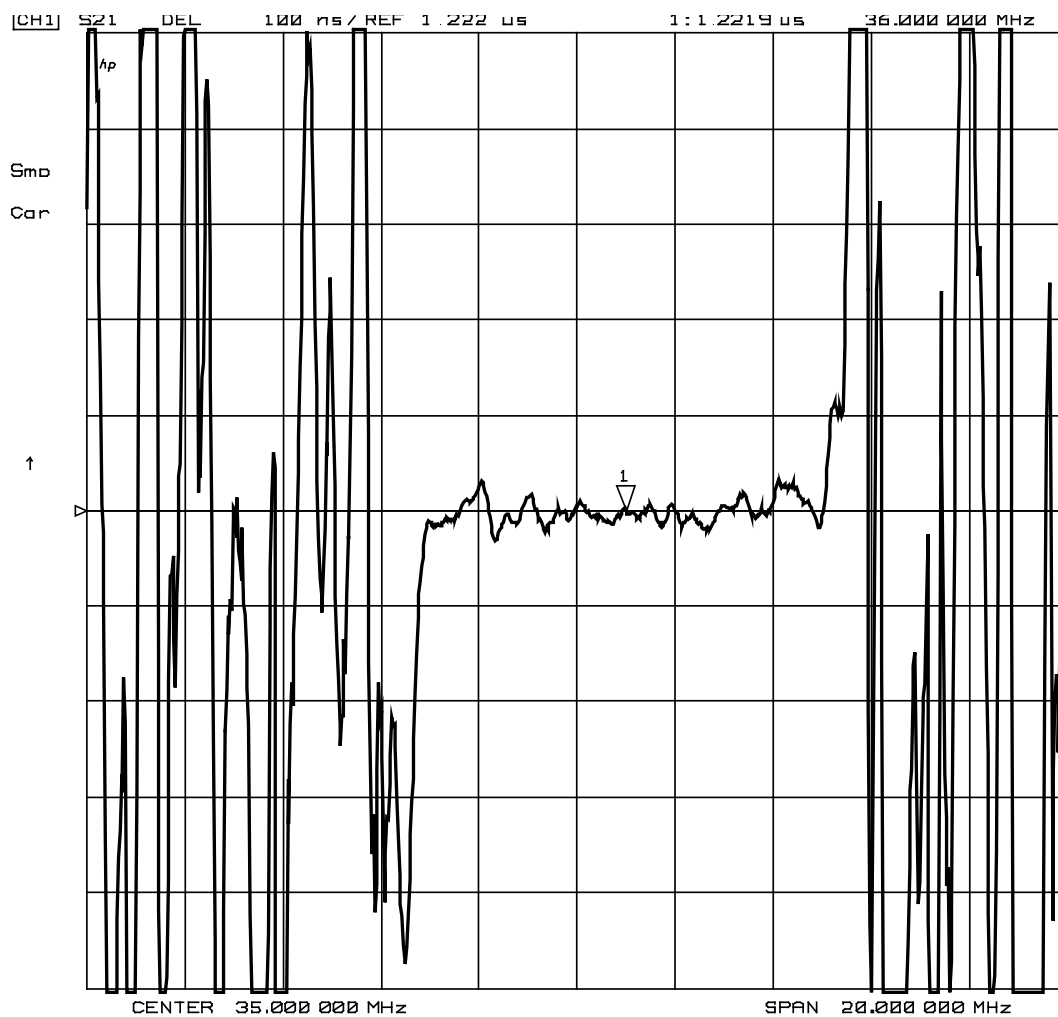

Marker1 : 36.00 MHz

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn