

Selection Guide

Part No.	Dice	Lens Type	Iv (ucd) [1] @ 10mA		Description
			Min.	Typ.	
ACDA03-41SRWA-F01	Super Bright Red (GaAlAs)	WHITE DIFFUSED	4700	19000	Common Anode, Rt. Hand Decimal.

Note:

1. Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ_{peak}	Peak Wavelength	Super Bright Red	660		nm	I _F =20mA
λ_D [1]	Dominant Wavelength	Super Bright Red	640		nm	I _F =20mA
$\Delta\lambda_{1/2}$	Spectral Line Half-width	Super Bright Red	20		nm	I _F =20mA
C	Capacitance	Super Bright Red	45		pF	V _F =0V;f=1MHz
V _F [2]	Forward Voltage	Super Bright Red	1.85	2.5	V	I _F =20mA
I _R	Reverse Current	Super Bright Red		10	uA	V _R =5V

Notes:

1.Wavelength: +/-1nm.


2. Forward Voltage: +/-0.1V.

Absolute Maximum Ratings at TA=25°C

Parameter	Super Bright Red	Units
Power dissipation	75	mW
DC Forward Current	30	mA
Peak Forward Current [1]	155	mA
Reverse Voltage	5	V
Operating / Storage Temperature	-40°C To +85°C	

Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

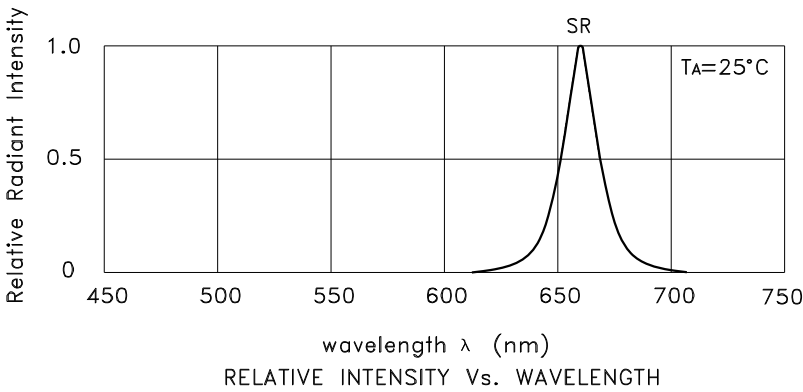

Super Bright Red ACDA03-41SRWA-F01






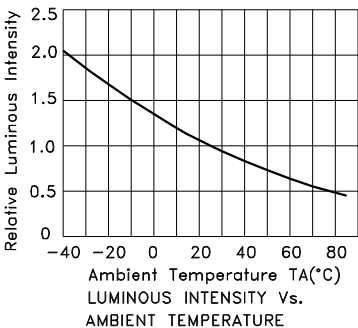


Figure 1 is a line graph showing the temperature profile of the test specimen over time. The Y-axis represents Temperature in degrees Celsius (°C), ranging from 0 to 300. The X-axis represents Time in seconds (sec), ranging from 0 to 300. The profile starts at 25°C at 0 seconds. It rises at a rate of 4°C/s to 150°C at 40 seconds. From 150°C, it continues to rise at 4°C/s to 180°C at 60 seconds. From 180°C, it continues to rise at 4°C/s to 230°C at 160 seconds. From 230°C, it continues to rise at 4°C/s to 260°C at 200 seconds. It then holds at 260°C for 10 seconds. Finally, it cools at a rate of 4°C/s to 100°C at 250 seconds.

Time (sec)	Temperature (°C)	Rate (°C/s)
0	25	-
40	150	4
60	180	4
160	230	4
200	260	4
210	260	0
250	100	-4


1. We recommend the reflow temperature 245°C(+/-5°C).The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

Reel Dimension

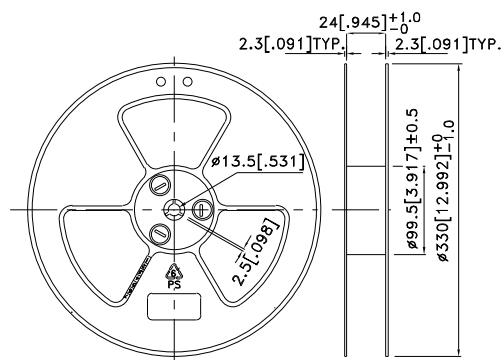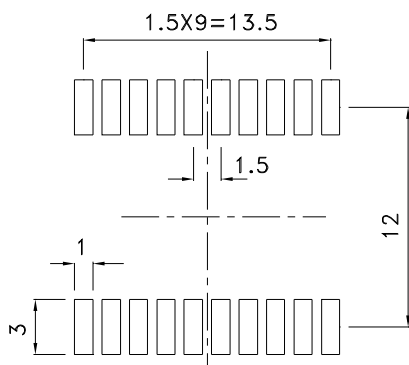

PACKING & LABEL SPECIFICATIONS

ACDA03-41SRWA-F01

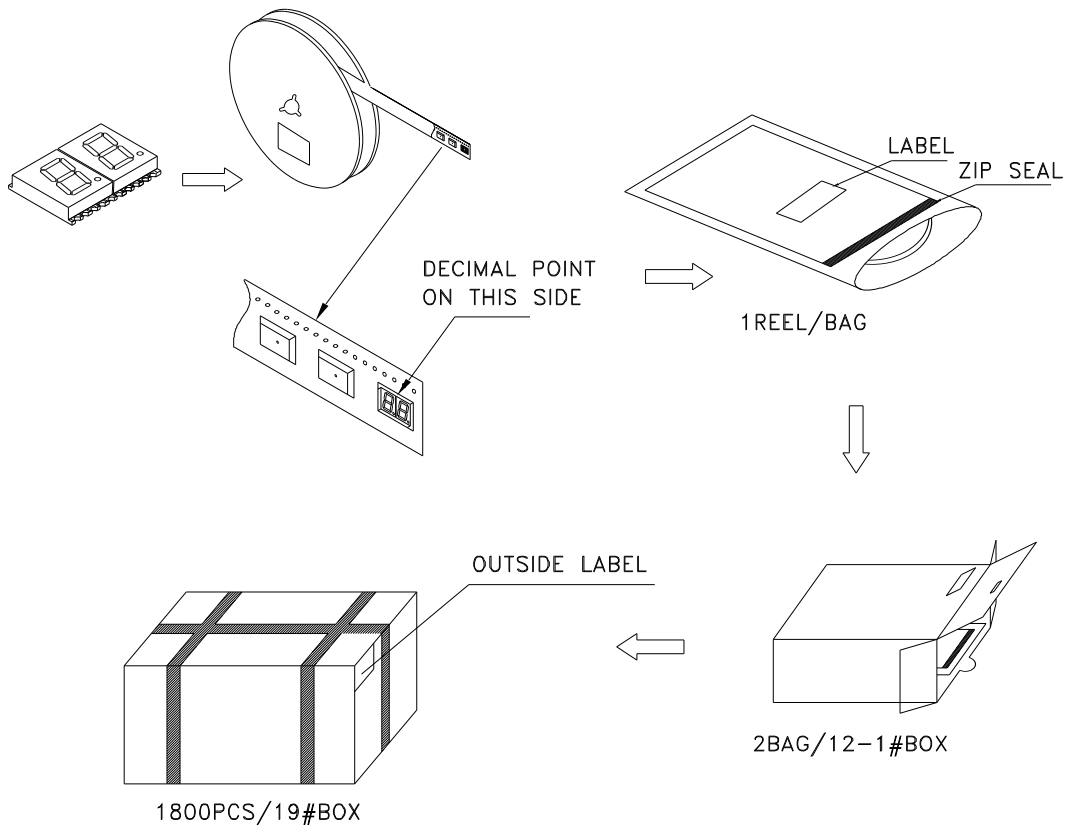

Inside LABEL Paste On The Tape-pipe

Kingbright	TYPE: ACDX03-41xxx	DATE
QTY: 300 PCS	CODE: xx	Number OF FQC
XXXXXXXXXX-XXXX	RoHS Compliant	
LOT NO.		

Outside LABEL Paste On The BAG

ACDX03-41xxx	300 PCS	Number OF QA
RoHS Compliant	DATE	

Outside LABEL Paste On The 19#Box

BOX Number	XXXX	XX XX
ACDX03-41xxx	1800	x
Number OF QA	DATE	
RoHS Compliant		

Outside LABEL Paste On The 12-1#Box

ACDX03-41xxx	600 PCS	Number OF QA
RoHS Compliant	DATE	