

2SC5497

VHF~UHF BAND LOW NOISE AMPLIFIER APPLICATIONS

Unit in mm

- Low Noise Figure : $NF = 1.4\text{dB}$ ($f = 2\text{GHz}$)
- High Gain : $G_a = 14\text{dB}$ ($f = 2\text{GHz}$)


MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CB0}	8	V
Collector-Emitter Voltage	V_{CEO}	4.5	V
Emitter-Base Voltage	V_{EB0}	1.5	V
Collector Current	I_C	15	mA
Base Current	I_B	7.5	mA
Collector Power Dissipation	P_C	67.5	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	$-55 \sim 125$	$^\circ\text{C}$

1, 3. EMITTER	
2. BASE	
3. COLLECTOR	
USQ	
JEDEC	—
EIAJ	—
TOSHIBA	2-2K1A

Weight : 0.006mg

MARKING

MICROWAVE CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Transition Frequency	f_T	$V_{CE} = 3\text{V}$, $I_C = 10\text{mA}$	14	18	22	GHz
Insertion Gain	$ S_{21e} ^2 (1)$	$V_{CE} = 3\text{V}$, $I_C = 10\text{mA}$, $f = 1\text{GHz}$	16.5	19	21.5	dB
	$ S_{21e} ^2 (2)$	$V_{CE} = 3\text{V}$, $I_C = 10\text{mA}$, $f = 2\text{GHz}$	11.5	14	16.5	
Noise Figure	NF (1)	$V_{CE} = 3\text{V}$, $I_C = 3\text{mA}$, $f = 1\text{GHz}$	—	1.0	1.4	dB
	NF (2)	$V_{CE} = 3\text{V}$, $I_C = 3\text{mA}$, $f = 2\text{GHz}$	—	1.4	1.8	

961001EAA1

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

● The information contained herein is subject to change without notice.





ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = 8V, I_E = 0$	—	—	1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 1V, I_C = 0$	—	—	1	μA
DC Current Gain	h_{FE} (Note 1)	$V_{CE} = 3V, I_C = 10mA$	50	—	150	—
Output Capacitance	C_{ob}	$V_{CB} = 3V, I_E = 0, f = 1MHz$ (Note 2)	—	0.40	0.65	pF
Reverse Transfer Capacitance	C_{re}		—	0.20	0.45	pF

(Note) : C_{re} is measured by 3 terminal method with Capacitance Bridge.

CAUTION

This device electrostatic sensitivity. Please handle with caution.

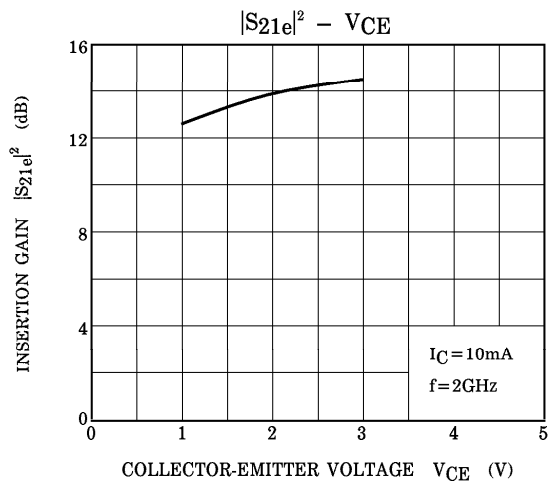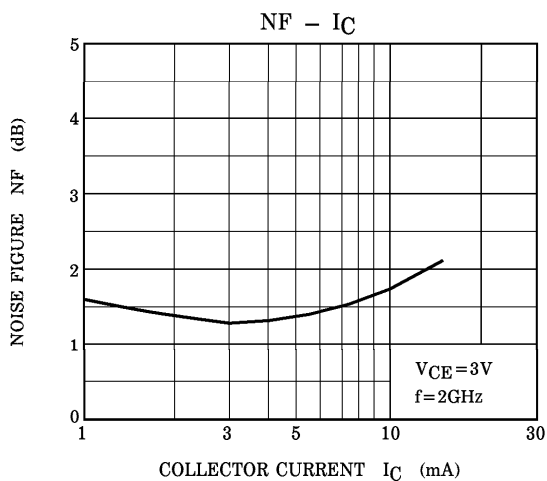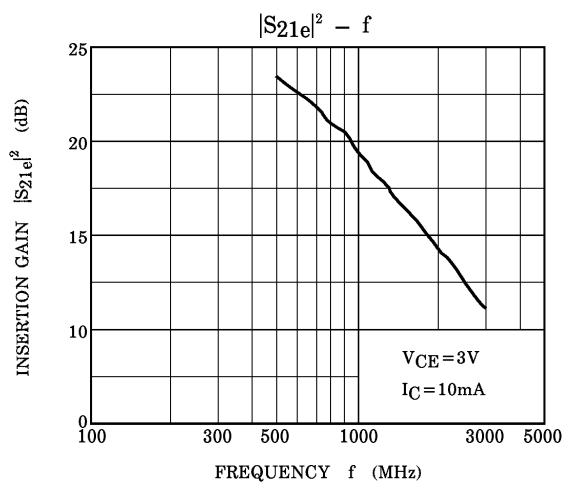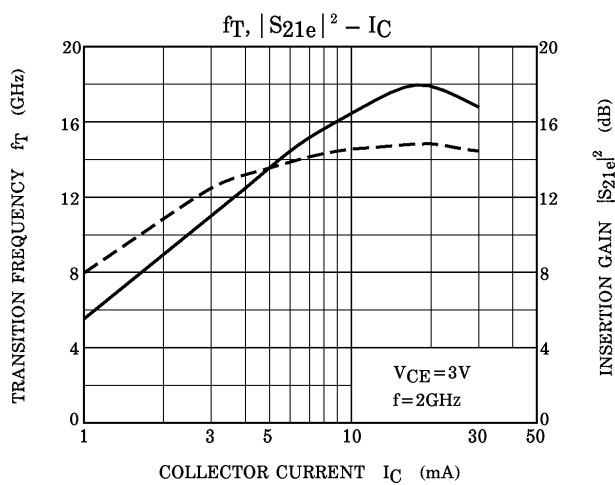

S-PARAMETER $Z_O = 50\Omega$, $T_a = 25^\circ\text{C}$
 $V_{CE} = 3\text{V}$, $I_C = 3\text{mA}$

f (MHz)	S11		S21		S12		S22	
	Mag.	Ang.	Mag.	Ang.	Mag.	Ang.	Mag.	Ang.
100	0.918	-9.5	9.134	171.9	0.015	74.7	0.978	-6.5
200	0.910	-18.7	8.939	164.5	0.027	82.9	0.960	-12.1
300	0.886	-27.6	8.725	157.3	0.039	74.8	0.931	-18.7
400	0.855	-36.4	8.430	150.5	0.050	68.5	0.905	-24.3
500	0.824	-44.6	8.090	144.5	0.059	66.8	0.868	-29.3
600	0.802	-52.1	7.716	138.1	0.072	61.8	0.841	-34.1
700	0.762	-59.9	7.341	133.0	0.073	56.3	0.796	-39.1
800	0.728	-67.3	7.078	127.5	0.091	52.0	0.765	-43.6
900	0.698	-75.0	6.691	123.5	0.091	50.5	0.721	-47.0
1000	0.667	-80.4	6.411	118.2	0.103	44.4	0.694	-50.2
1100	0.653	-86.7	6.080	114.3	0.097	45.9	0.654	-53.9
1200	0.620	-92.8	5.862	110.1	0.111	38.0	0.629	-57.1
1300	0.607	-98.8	5.551	106.6	0.113	39.7	0.593	-61.1
1400	0.576	-104.5	5.363	102.6	0.110	35.9	0.574	-62.9
1500	0.569	-109.8	5.088	99.6	0.114	35.9	0.558	-65.6
1600	0.550	-115.0	4.901	96.0	0.114	32.1	0.527	-68.8
1700	0.536	-119.8	4.717	93.2	0.119	28.3	0.501	-70.7
1800	0.530	-124.5	4.492	89.7	0.124	32.5	0.482	-72.4
1900	0.508	-130.2	4.331	87.2	0.121	30.4	0.458	-74.9
2000	0.498	-133.2	4.169	83.7	0.123	30.4	0.438	-76.3
2100	0.502	-138.9	4.032	81.9	0.120	28.5	0.432	-78.1
2200	0.490	-140.9	3.893	78.5	0.124	27.3	0.412	-80.7
2300	0.484	-145.9	3.747	77.3	0.137	28.1	0.401	-79.2
2400	0.487	-149.3	3.646	73.3	0.135	23.2	0.387	-82.3
2500	0.477	-153.3	3.525	72.0	0.132	25.0	0.364	-83.1
2600	0.462	-156.5	3.452	69.0	0.136	32.0	0.358	-84.5

$V_{CE} = 3V$, $I_C = 5mA$

f (MHz)	S11		S21		S12		S22	
	Mag.	Ang.	Mag.	Ang.	Mag.	Ang.	Mag.	Ang.
100	0.873	-12.1	13.426	169.8	0.011	91.9	0.961	-7.6
200	0.853	-24.4	12.949	160.4	0.025	82.7	0.933	-15.9
300	0.819	-35.7	12.471	152.0	0.038	69.0	0.893	-23.7
400	0.784	-45.7	11.751	144.3	0.053	61.6	0.852	-30.0
500	0.738	-55.7	11.046	136.9	0.055	66.2	0.797	-35.8
600	0.699	-64.8	10.327	130.4	0.059	56.2	0.757	-40.9
700	0.655	-73.5	9.581	124.9	0.064	51.4	0.711	-46.4
800	0.621	-81.3	9.097	119.8	0.066	46.1	0.661	-50.1
900	0.595	-88.3	8.423	114.8	0.077	45.9	0.620	-53.9
1000	0.564	-95.6	7.925	110.6	0.081	40.6	0.582	-57.1
1100	0.548	-102.2	7.436	106.7	0.084	40.8	0.547	-60.4
1200	0.519	-107.2	7.068	102.7	0.097	41.7	0.518	-62.9
1300	0.508	-114.1	6.638	99.4	0.091	42.0	0.491	-66.6
1400	0.488	-119.7	6.333	95.9	0.083	39.9	0.476	-67.8
1500	0.477	-125.6	5.970	92.9	0.098	41.3	0.445	-70.2
1600	0.467	-129.3	5.720	89.6	0.100	40.2	0.437	-73.7
1700	0.456	-134.9	5.457	87.3	0.098	36.1	0.404	-74.1
1800	0.459	-139.7	5.159	83.9	0.111	41.0	0.390	-75.8
1900	0.454	-143.1	4.945	81.8	0.105	36.1	0.373	-78.8
2000	0.453	-147.1	4.749	78.8	0.109	38.3	0.352	-79.2
2100	0.441	-152.1	4.587	76.7	0.116	35.7	0.330	-80.1
2200	0.430	-155.2	4.420	74.1	0.117	35.2	0.315	-81.7
2300	0.433	-159.0	4.254	72.6	0.116	34.2	0.313	-84.6
2400	0.414	-162.4	4.100	69.1	0.122	34.6	0.308	-85.6
2500	0.438	-167.1	3.963	67.9	0.117	33.4	0.286	-86.2
2600	0.424	-169.2	3.870	65.4	0.114	32.4	0.282	-90.4

$V_{CE} = 3V$, $I_C = 10mA$

f (MHz)	S11		S21		S12		S22	
	Mag.	Ang.	Mag.	Ang.	Mag.	Ang.	Mag.	Ang.
100	0.772	−17.7	21.134	166.1	0.014	69.7	0.942	−11.3
200	0.735	−33.8	19.870	153.8	0.026	72.6	0.894	−21.9
300	0.678	−49.2	18.317	142.9	0.029	73.4	0.818	−31.5
400	0.623	−63.2	16.563	133.9	0.044	64.8	0.738	−38.2
500	0.576	−74.3	14.956	126.2	0.045	56.9	0.674	−45.2
600	0.547	−85.3	13.473	119.5	0.048	58.7	0.607	−50.1
700	0.506	−94.0	12.201	114.2	0.053	53.4	0.559	−54.4
800	0.475	−103.4	11.213	109.2	0.056	50.0	0.516	−57.8
900	0.461	−111.2	10.178	105.2	0.065	58.3	0.475	−61.2
1000	0.439	−117.5	9.440	101.3	0.070	45.9	0.444	−64.0
1100	0.423	−123.0	8.705	97.8	0.062	52.5	0.407	−64.9
1200	0.417	−130.9	8.205	94.4	0.068	49.0	0.389	−68.2
1300	0.415	−135.7	7.597	91.4	0.072	48.8	0.351	−71.0
1400	0.409	−141.8	7.191	88.5	0.075	43.8	0.347	−71.7
1500	0.395	−144.5	6.760	85.9	0.084	46.0	0.324	−75.4
1600	0.400	−149.6	6.429	83.3	0.080	43.6	0.319	−76.4
1700	0.393	−154.1	6.096	81.2	0.086	47.5	0.288	−78.2
1800	0.387	−158.5	5.753	78.1	0.091	40.3	0.287	−78.5
1900	0.391	−161.2	5.503	76.5	0.086	41.3	0.271	−78.2
2000	0.395	−164.9	5.246	73.6	0.100	44.5	0.254	−80.1
2100	0.402	−168.9	5.037	71.9	0.098	44.0	0.254	−85.8
2200	0.395	−171.3	4.841	69.5	0.104	41.1	0.244	−85.2
2300	0.397	−172.4	4.641	68.3	0.110	43.1	0.242	−83.4
2400	0.387	−179.3	4.503	64.9	0.115	50.8	0.244	−87.0
2500	0.397	179.8	4.306	63.7	0.109	42.8	0.228	−87.5
2600	0.390	176.3	4.197	61.5	0.118	41.6	0.216	−87.6