

# KR Electronics

## General Description


KR 2788 is a 85 MHz differential lowpass filter. The filter is designed for 100 Ω source and load impedance. Other frequencies and impedances are available. Please consult the factory.

## Features

- Differential Lowpass Filter
- 100 Ω
- DIP Package

## Typical Performance

### Overall Response

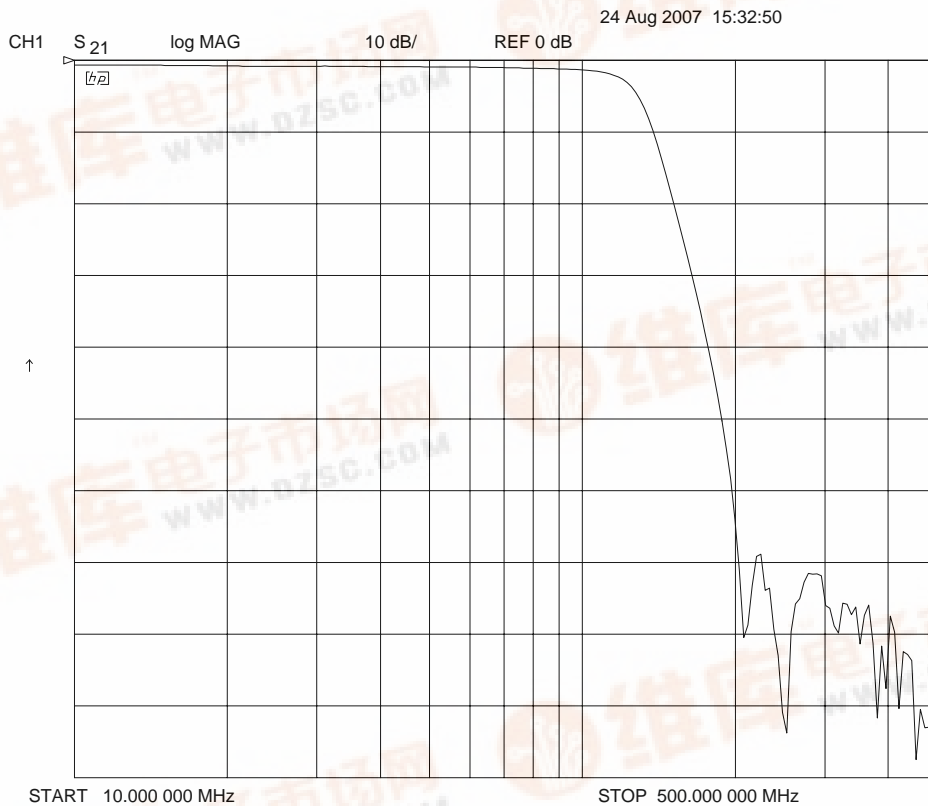

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
 Email [sales@krfilters.com](mailto:sales@krfilters.com)  
 Phone (732) 636-1900  
 Fax (732) 636-1982




# KR 2788

## Specifications

Parameter	Specification
Filter type	Differential Lowpass
< 3 dB Frequency	85 MHz
Typical 3 dB Frequency	121 MHz
Attenuation at 215 MHz	> 60 dB
Source & Load	100 Ω

## Physical Dimensions

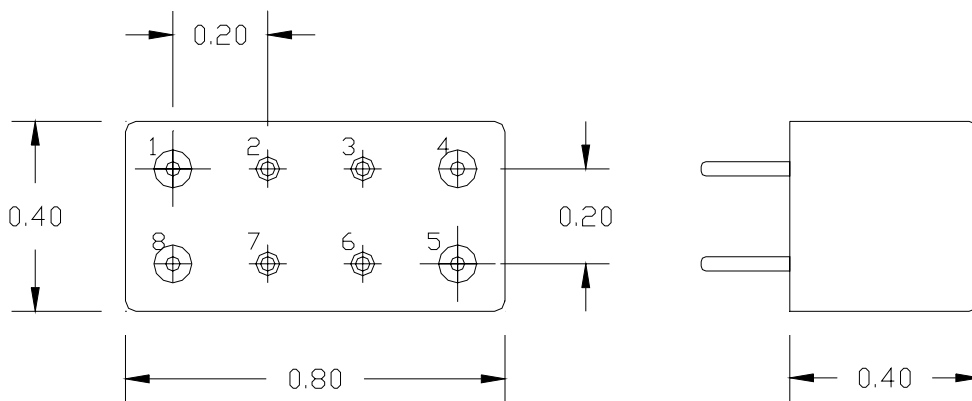

**NOTES:**

1. FILTER IS BI-DIRECTIONAL
2. ALL PINS ARE 0.030" DIA
3. DIMENSIONS ARE IN INCHES

- Pin 1—IN
- Pin 8—IN
- Pin 4—OUT
- Pin 5—OUT

Connect all remaining pins to GND (also connected to Case)