



Tel : 0044 (0)118 979 1238
Fax : 0044 (0)118 979 1283
email : info@actcrystals.com

ACT752T-4 (TCXO) ACT752VT-4 (VCTCXO) Clipped Sinewave

Compatible with Eu Directive
2002/EC - RoHS

The ACT752T/VT-4 is available in TCXO and VCTCXO versions. Both of which are housed in a ceramic package with a seam sealed metal lid and mounted on a substrate, having external components. Ideal for Communications Applications.


Please specify whether you require a TCXO or VCTCXO version when ordering.



Specification


Parameter	Symbol	Specification	Condition
Frequency Range	fo	10.0 ~ 26.00 MHz	Please specify
Frequency Stability			
vs. Temperature	Df/fo	±2.5ppm	@ Specified Operating Temp. range
vs. Aging	Fa	±1.0ppm per year	25+/-3°C
vs. Voltage change		±0.3ppm	+3.0V ± 0.3V
vs. Load change		±0.2ppm	10KΩ / 10pF ± 10%
vs. Reflow		±0.5ppm	One solder reflow cycle
Temp Operating Range	Topr	-30° ~ +75°C & -30° ~ +85°C	Please specify
Storage Temp Range	Tstg	-40~ 85°	
Supply Voltage	Vcc	3.0V ±0.3V	
Supply Current	Iop	2.0mA max	
Start up Time		2.5mSec max, 2mSec typical.	
Input Voltage Range	Vin	+2.7VDC ~ 5.0VDC	Rating please see note (#) below
Voltage Control Range	Vcont	0.5V to +2.5V	VCTCXO
Tuning Adjustment		±8ppm min	VCTCXO
Slope Polarity/Linearity		Positive / 10% max	VCTCXO
Output Waveform		Clipped Sine Wave	
Output Voltage	Vout	0.8V p-p max	
Output Load	N/CL	10KΩ / 10pF	

Oscillator will function over this range of Vcc but will not necessarily meet the specifications for a Vcc outside of 3.3±0.3V.




Pad Connections
#1 TCXO Ground
#2 VCTCXO V Control
#3 Ground
#4 Output
#5 Vcc


Pad Surface Material
Au



Dimensions (mm)



Suggested footprint



Please note that all parameters can not necessarily be specified in the same device

Customer to specify : Frequency, Type, Stability, Operating Temperature Range.

In line with our ongoing policy of product evolution and improvement, the above specification may be subject to change without notice

ISO9001:2000 Registered

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berkshire, RG41 2EY, UK

<http://www.actcrystals.com>


Issue: 4 13
Date:28/10/05




ACT752T/VT -4 TAPE & REEL SPECIFICATIONS

Standard Reel size 1000pcs

Tape / Reel Dimensions (Units in mm)

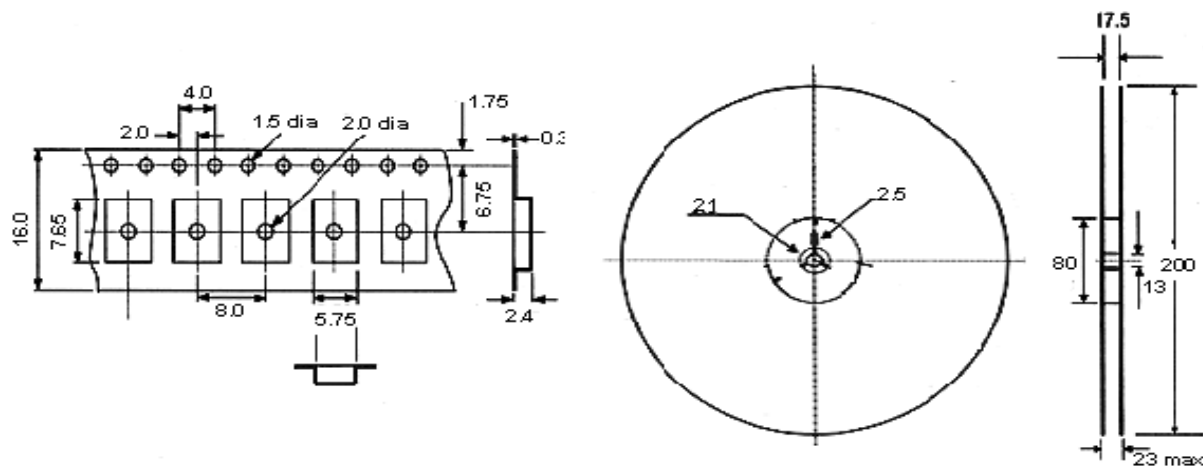

Soldering Reflow Information

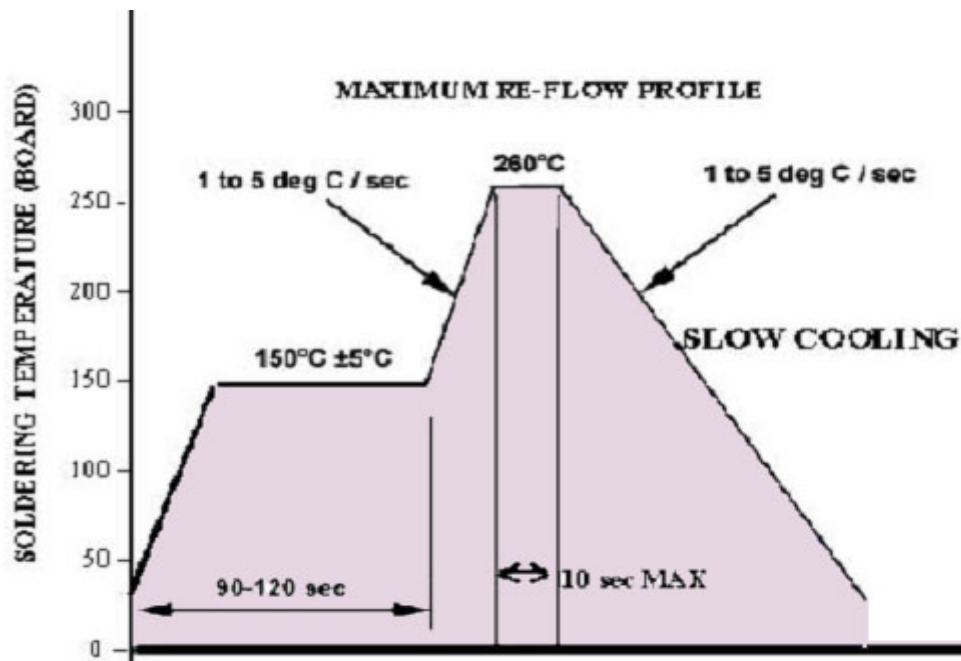

In line with our ongoing policy of product evolution and improvement, the above specification may be subject to change without notice

ISO9001:2000 Registered

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berkshire, RG41 2EY, UK

<http://www.actcrystals.com>

Issue: 4 I3

Date: 28/10/05