


LEADED INDUCTORS

■ OPERATING TEMP -25 ~ +85°C (Including self-generated heat)

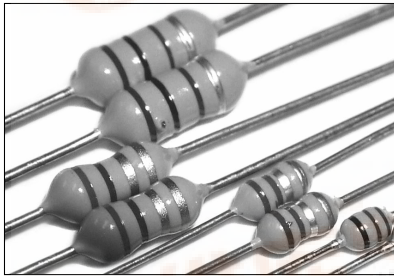

■ FEATURES

- ABCO Axial inductor is wire wound on the fewite core.
- Extremely reliable inductors that are ideal for signal and power line applications
- Highly efficient automated production processes can provide high quality inductors in large volumes.


■ APPLICATION

- Consumer electronics (such as VCRs, TVs, audio, equipment, general electronic appliances.)



■ MARKING

- AL02, ALN02, ALC02



- AL03, AL04, AL05



■ ORDERING CODE

1 Part name	
A	Axial Inductor

2 Characteristics	
L	Standard Type
N, C	High Current Type

3 Body Size (D×L)[mm]	
02	2.5×3.4(AL, ALC)
	2.5×3.7(ALN)
03	3.0×7.0
04	4.2×9.8
05	4.5×14.0

4 Taping Configurations	
TA	Axial lead(26mm lead space) /ammo pack(02/03type)
TB	Axial lead(52mm lead space) /ammo pack(all type)
TR	Axial lead Reel pack (all type)


5 Nominal Inductance[μH]	
R22	0.22
1R5	1.5
120	12

6 Inductance Tolerance[%]	
J	± 5
K	± 10
M	± 20

Color	Inductance[μH]			
	1st Digit	2nd Digit	Multiplier	Tolerance
	1	2	3	4
Black	0		×1	± 20%
Brown	1		×10	-
Red	2		×100	-
Orange	3		×1000	-
Yellow	4		-	-
Green	5		-	-
Blue	6		-	-
Purple	7		-	-
Grey	8		-	-
White	9		-	-
Gold	-		×0.1	± 5%
Silver	-		×0.01	± 10%



■ APPERANCE DIMENSIONS

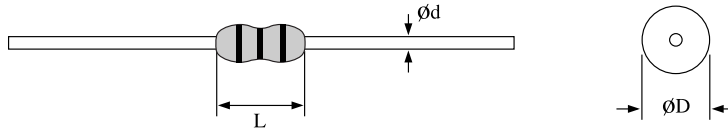



Unit: mm

Type	Dimensions			Taped	
	L	ØD	Ød	Straight	
AL02, ALC02	3.4max.	2.5max.	0.5 ± 0.05	TB	
ALN02	3.7max.	2.5max.			
AL02, ALC02	3.4max.	2.5max.	0.45 ± 0.05	TA	
ALN02	3.7max.	2.5max.			
AL03	7.0max.	3.0max.	0.5 ± 0.05	TA TB	
AL04	9.8max.	4.2max.	0.65 ± 0.05	TB	
AL05	14.0max.	4.5max.	0.65 ± 0.05	TB	

■ SHAPE DIMENSIONS

● TA(26mm)

● TB(52mm)

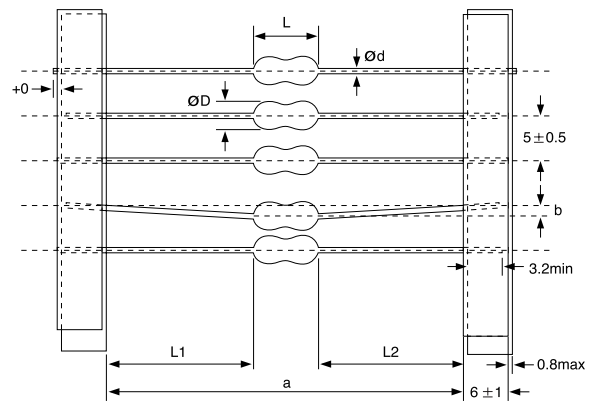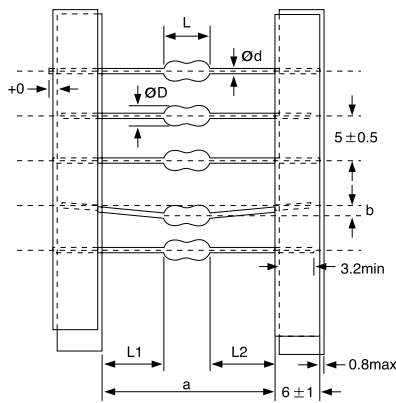

Unit: mm

Unit: mm

Type	Dimensions						Pitch Minimum insertion pitch
	ØD	L	a	b	L1-L2	Ød	
AL02 ALC02	2.5max.	3.4max.	26 ^{+0.5} ₋₀	0.8max.	0.5max.	0.45 ± 0.05	5.0
ALN02	2.5max.	3.7max.	26 ^{+0.5} ₋₀	0.8max.	0.5max.	0.45 ± 0.05	5.0
AL03	3.0max.	7.0max.	26 ⁺¹ _{-0.5}	0.8max.	1.0max.	0.50 ± 0.05	10.0

Type	Dimensions						Pitch Minimum insertion pitch
	ØD	L	a	b	L1-L2	Ød	
AL02 ALC02	2.5max.	3.4max.	52 ⁺² ₋₁	1.2max.	1.0max.	0.50 ± 0.05	5.0
ALN02	2.5max.	3.7max.	52 ⁺² ₋₁	1.2max.	1.0max.	0.50 ± 0.05	7.5
AL03	3.0max.	7.0max.	52 ⁺² ₋₁	1.2max.	1.0max.	0.50 ± 0.05	10.0
AL04	4.2max.	9.8max.	52 ⁺² ₋₁	1.2max.	1.0max.	0.65 ± 0.05	12.5
AL05	4.5max.	14.0max.	52 ⁺²	1.2max.	1.0max.	0.50 ± 0.05	20.0

AVAILABLE INDUCTANCE RANGE

Type Range	AL02		ALC02		ALN02		AL03		AL04		AL05	
	I max.[mA]	Rdc max.[Ω]	I max.[mA]	Rdc max.[Ω]	I max.[mA]	Rdc max.[Ω]	I max.[mA]	Rdc max.[Ω]	I max.[mA]	Rdc max.[Ω]	I max.[mA]	Rdc max.[Ω]
0												
1	0.22		0.22		0.12		0.22		0.22			
10												
100	470		100		470							
1000							1000					
2200												
8200												
10000									10000			

● Examples

Inductance	I max. [mA]	Rdc max. [Ω]	I max. [mA]	Rdc max. [Ω]	I max. [mA]	Rdc max. [Ω]	I max. [mA]	Rdc max. [Ω]	I max. [mA]	Rdc max. [Ω]	I max. [mA]	Rdc max. [Ω]
1 μH	270	0.8	510	0.4	500	0.32	270	0.8	920	0.19	5600	0.022
10 μH	160	2.3	270	1.4	280	1.0	160	2.3	500	0.58	2100	0.062
100 μH	44	12	105	9.1	120	5.6	90	7.0	275	1.80	700	0.480
1000 μH	-	-	-	-	-	-	40	33.0	100	14.0	240	5.800
2200 μH	-	-	-	-	-	-	-	-	80	40.0	-	-
8200 μH	-	-	-	-	-	-	-	-	45	116.0	-	-
10000 μH	-	-	-	-	-	-	-	-	35	148.0	-	-

ITEM PART NUMBERS

● ALC02

Ordering Code	Inductance [μ H]	Inductance Tolerance	Q (min.)	Measuring Frequency [MHz]	Self-Resonant Frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rate Current [mA] (max.)		
ALC02TOR22K	0.22	10%	50	25.2	450	0.2	730		
ALC02TOR27K	0.27				400	0.21	700		
ALC02TOR33K	0.33				350	0.23	670		
ALC02TOR39K	0.39				320	0.25	640		
ALC02TOR47K	0.47				300	0.27	620		
ALC02TOR56K	0.56				280	0.3	590		
ALC02TOR68K	0.68				240	0.33	570		
ALC02TOR82K	0.82				210	0.35	540		
ALC02TO1R0K	1				190	0.4	510		
ALC02TO1R2J	1.2	5%	40	7.96	110	0.43	490		
ALC02TO1R5J	1.5				80	0.48	460		
ALC02TO1R8J	1.8				70	0.53	440		
ALC02TO2R2J	2.2				60	0.6	420		
ALC02TO2R7J	2.7				55	0.68	390		
ALC02TO3R3J	3.3				50	0.75	370		
ALC02TO3R9J	3.9				45	0.83	350		
ALC02TO4R7J	4.7				40	0.91	340		
ALC02TO5R6J	5.6				35	1	320		
ALC02TO6R8J	6.8				30	1.1	300		
ALC02TO8R2J	8.2				26	1.3	290		
ALC02TO100J	10				24	1.4	270		
ALC02TO120J	12				40	2.52	22	1.4	270
ALC02TO150J	15						20	1.6	260
ALC02TO180J	18						18	1.7	250
ALC02TO220J	22	17	1.9	230					
ALC02TO270J	27	16	2.5	200					
ALC02TO330J	33	14	3.4	180					
ALC02TO390J	39	13	3.6	170					
ALC02TO470J	47	12	4.6	150					
ALC02TO560J	56	11	5.1	140					
ALC02TO680J	68	10	5.6	130					
ALC02TO820J	82	9.5	7.9	115					
ALC02TO101J	100	9	9.1	105					

*please specify the taping configuration code.

*O: A, B, R

●ALN02

Ordering Code	Inductance [μH]	Inductance Tolerance	Q (min.)	Measuring Frequency [MHz]	Self-Resonant Frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rate Current [mA] (max.)						
ALN02T O R12K	0.12	± 10% (± 5%)	50	25.2	500	0.12	850						
ALN02T O R15K	0.15				500	0.14	800						
ALN02T O R18K	0.18				500	0.15	760						
ALN02T O R22K	0.22				500	0.16	730						
ALN02T O R27K	0.27				500	0.18	690						
ALN02T O R33K	0.33				480	0.19	660						
ALN02T O R39K	0.39				430	0.21	640						
ALN02T O R47K	0.47				380	0.23	610						
ALN02T O R56K	0.56				350	0.25	580						
ALN02T O R68K	0.68				310	0.27	550						
ALN02T O R82K	0.82				270	0.29	520						
ALN02T O 1R0K	1.0				240	0.32	500						
ALN02T O 1R2K	1.2				7.96	210	0.35	480					
ALN02T O 1R5K	1.5						190	0.38	450				
ALN02T O 1R8K	1.8						140	0.42	430				
ALN02T O 2R2K	2.2						90	0.47	410				
ALN02T O 2R7K	2.7						70	0.52	390				
ALN02T O 3R3K	3.3						50	0.57	370				
ALN02T O 3R9K	3.9		35	0.63			360						
ALN02T O 4R7K	4.7		32	0.69			340						
ALN02T O 5R6K	5.6		30	0.75			320						
ALN02T O 6R8K	6.8		28	0.84			310						
ALN02T O 8R2K	8.2		26	0.92			290						
ALN02T O 100K	10		40	24			1.0	280					
ALN02T O 120K	12						2.52	22	1.0	280			
ALN02T O 150K	15								20	1.2	265		
ALN02T O 180K	18									18	1.3	250	
ALN02T O 220K	22										17	1.5	235
ALN02T O 270K	27											15	1.7
ALN02T O 330K	33		14	2.2									180
ALN02T O 390K	39			13	2.4	170							
ALN02T O 470K	47				12	2.8	160						
ALN02T O 560K	56					10	4.1	140					
ALN02T O 680K	68						9.2	4.5	130				
ALN02T O 820K	82							8.8	5.0	125			
ALN02T O 101K	100		8.0						5.6	120			
ALN02T O 121K	120			6.6					9.2	90			
ALN02T O 151K	150				5.8				10.5	85			
ALN02T O 181K	180					5.4			11.5	80			
ALN02T O 221K	220						4.8		13.0	75			
ALN02T O 271K	270							3.6	16.0	70			
ALN02T O 331K	330		3.4						18.0	66			
ALN02T O 391K	390	3.2		20.0					63				
ALN02T O 471K	470			3.0	22.0				60				

*please specify the taping configuration code.

*O: A, B, R

ITEM PART NUMBERS

●AL03

Ordering Code	Inductance [μ H]	Inductance Tolerance	Q (min.)	Measuring Frequency [MHz]	Self-Resonant Frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rate Current [mA] (max.)
AL03TO R22K	0.22	$\pm 10\%$ ($\pm 5\%$)	35	25.2	450	0.40	400
AL03TO R27K	0.27				410	0.43	380
AL03TO R33K	0.33				360	0.48	370
AL03TO R39K	0.39				300	0.51	350
AL03TO R47K	0.47				230	0.56	330
AL03TO R56K	0.56				210	0.61	320
AL03TO R68K	0.68				190	0.67	310
AL03TO R82K	0.82				170	0.74	290
AL03TO 1R0K	1.0				150	0.80	270
AL03TO 1R2K	1.2				144	0.90	260
AL03TO 1R5K	1.5		131	1.0	250		
AL03TO 1R8K	1.8		121	1.1	240		
AL03TO 2R2K	2.2		110	1.2	230		
AL03TO 2R7K	2.7		100	1.3	220		
AL03TO 3R3K	3.3		94	1.4	210		
AL03TO 3R9K	3.9		65	1.6	200		
AL03TO 4R7K	4.7		56	1.7	190		
AL03TO 5R6K	5.6		48	1.9	180		
AL03TO 6R8K	6.8		37	2.0	175		
AL03TO 8R2K	8.2		25	2.2	165		
AL03TO 100K	10		21	2.3	160		
AL03TO 120K	12		19	2.5	150		
AL03TO 150K	15		17	2.8	145		
AL03TO 180K	18		13	3.1	140		
AL03TO 220K	22		9.6	3.4	130		
AL03TO 270K	27		7.2	3.8	125		
AL03TO 330K	33		6.3	4.1	120		
AL03TO 390K	39		6.3	4.5	115		
AL03TO 470K	47		6.3	4.9	110		
AL03TO 560K	56		6.2	5.3	105		
AL03TO 680K	68		5.7	5.8	100		
AL03TO 820K	82		5.3	6.3	95		
AL03TO 101K	100		4.8	7.0	90		
AL03TO 121K	120		3.8	13	90		
AL03TO 151K	150		3.5	15	85		
AL03TO 181K	180		3.3	16	80		
AL03TO 221K	220		3.0	17	75		
AL03TO 271K	270		2.8	19	65		
AL03TO 331K	330		2.6	20	60		
AL03TO 391K	390		2.4	22	55		
AL03TO 471K	470	2.25	24	55			
AL03TO 561K	560	2.10	26	50			
AL03TO 681K	680	1.95	28	45			
AL03TO 821K	820	1.85	30	40			
AL03TO 102K	1000	1.40	33	40			

*please specify the taping configuration code.

*O: A, B, R

●AL04

Ordering Code	Inductance [μH]	Inductanced Tolerance	Q (min.)	Measuring Frequency [MHz]	Self-Resonant Frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rated Current [mA] (max.)		
AL04T O R22K	0.22	± 10% (± 5%)	45	25.2	300	0.10	1400		
AL04T O R27K	0.27				270	0.11	1320		
AL04T O R33K	0.33				250	0.12	1280		
AL04T O R39K	0.39				230	0.13	1200		
AL04T O R47K	0.47				220	0.14	1150		
AL04T O R56K	0.56				200	0.15	1100		
AL04T O R68K	0.68				190	0.16	1030		
AL04T O R82K	0.82				172	0.17	980		
AL04T O 1R0K	1.0				157	0.19	920		
AL04T O 1R2K	1.2				50	7.96	144	0.21	880
AL04T O 1R5K	1.5		131	0.23			830		
AL04T O 1R8K	1.8		121	0.25			790		
AL04T O 2R2K	2.2		110	0.28			750		
AL04T O 2R7K	2.7		60	100			0.30	720	
AL04T O 3R3K	3.3		65	70			94	0.34	670
AL04T O 3R9K	3.9						65	0.37	640
AL04T O 4R7K	4.7		75	80			56	0.39	620
AL04T O 5R6K	5.6						48	0.43	590
AL04T O 6R8K	6.8		37	0.48			550		
AL04T O 8R2K	8.2		25	0.52	530				
AL04T O 100K	10		21	0.58	500				
AL04T O 120K	12		50	2.52	19	0.63	480		
AL04T O 150K	15				17	0.72	460		
AL04T O 180K	18				13	0.77	430		
AL04T O 220K	22				9.6	0.84	410		
AL04T O 270K	27				55	45	7.2	0.94	390
AL04T O 330K	33						6.3	1.03	370
AL04T O 390K	39				6.3	1.12	350		
AL04T O 470K	47				6.3	1.22	340		
AL04T O 560K	56				40	6.2	1.34	320	
AL04T O 680K	68				5.7	1.47	305		
AL04T O 820K	82		35	5.3	1.62	290			
AL04T O 101K	100		30	4.8	1.80	275			
AL04T O 121K	120		55	3.8	3.70	185			
AL04T O 151K	150		45	3.5	4.20	175			
AL04T O 181K	180		50	3.3	4.60	165			
AL04T O 221K	220		55	3.0	5.10	155			
AL04T O 271K	270		65	0.796	2.8	5.80	145		
AL04T O 331K	330				2.6	6.40	137		
AL04T O 391K	390		60	55	2.4	7.00	133		
AL04T O 471K	470				2.25	7.70	126		
AL04T O 561K	560		55	50	2.10	8.50	120		
AL04T O 681K	680				1.95	9.40	113		
AL04T O 821K	820		1.85	10.5	105				
AL04T O 102K	1000		1.40	14.0	100				
AL04T O 122K	1200		50	0.252	1.20	22.0	110		
AL04T O 152K	1500				1.10	25.0	100		
AL04T O 182K	1800				0.98	28.0	90		
AL04T O 222K	2200				0.90	40.0	80		
AL04T O 272K	2700				0.85	44.0	70		
AL04T O 332K	3300	0.81			50.0	70			
AL04T O 392K	3900	40			0.252	0.72	63.0	60	
AL04T O 472K	4700					0.60	69.0	55	
AL04T O 562K	5600					0.55	77.0	50	
AL04T O 682K	6800					0.50	104.0	45	
AL04T O 822K	8200	0.48	116.0	45					
AL04T O 103K	10000	30	0.40	148.0	35				

*please specify the taping configuration code.

*O: A, B, R

ITEM PART NUMBERS

●AL05


Ordering Code	Inductance [μH]	Inductance Tolerance	Q (min.)	Measuring Frequency [MHz]	Self-Resonant Frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rate Current [mA] (max.)
AL05TO1R0K	1.0	± 10%	10	7.96	300	0.022	5600
AL05TO1R2K	1.2				260	0.024	5500
AL05TO1R5K	1.5				250	0.026	5000
AL05TO1R8K	1.8				240	0.029	4700
AL05TO2R2K	2.2				220	0.031	4500
AL05TO2R7K	2.7				195	0.034	4000
AL05TO3R3K	3.3				155	0.038	3400
AL05TO3R9K	3.9				115	0.040	3100
AL05TO4R7K	4.7				85	0.044	2800
AL05TO5R6K	5.6				55	0.048	2600
AL05TO6R8K	6.8				50	0.051	2400
AL05TO8R2K	8.2				38	0.056	2200
AL05TO100K	10				24	0.062	2100
AL05TO120K	12				18	0.076	1800
AL05TO150K	15				16	0.088	1700
AL05TO180K	18				15	0.110	1600
AL05TO220K	22				14	0.130	1400
AL05TO270K	27				13	0.140	1300
AL05TO330K	33				11	0.200	1200
AL05TO390K	39				10	0.220	1100
AL05TO430K	43				9.5	0.280	1000
AL05TO470K	47		9.5	0.280	1000		
AL05TO560K	56		8.0	0.300	900		
AL05TO680K	68		7.5	0.340	800		
AL05TO820K	82		7.0	0.385	700		
AL05TO101K	100		6.5	0.480	700		
AL05TO121K	120		5.0	0.595	600		
AL05TO151K	150		4.5	0.900	550		
AL05TO181K	180		4.0	1.10	500		
AL05TO221K	220		3.8	1.25	440		
AL05TO271K	270		3.5	1.85	420		
AL05TO331K	330		3.0	2.10	380		
AL05TO391K	390		2.8	2.28	340		
AL05TO471K	470	2.5	3.22	320			
AL05TO561K	560	2.2	3.85	290			
AL05TO681K	680	2.1	4.00	260			
AL05TO821K	820	2.0	5.00	250			
AL05TO102K	1000	1.8	5.80	240			
AL05TO122K	1200	1.6	7.10	200			
AL05TO152K	1500	1.5	7.80	190			
			15	0.796			
				0.252			

*please specify the taping configuration code.

*O: A, B, R


ELECTRICAL CHARACTERISTICS

● DC Bias Characteristics (Measured by HP4284A + HP42841A)

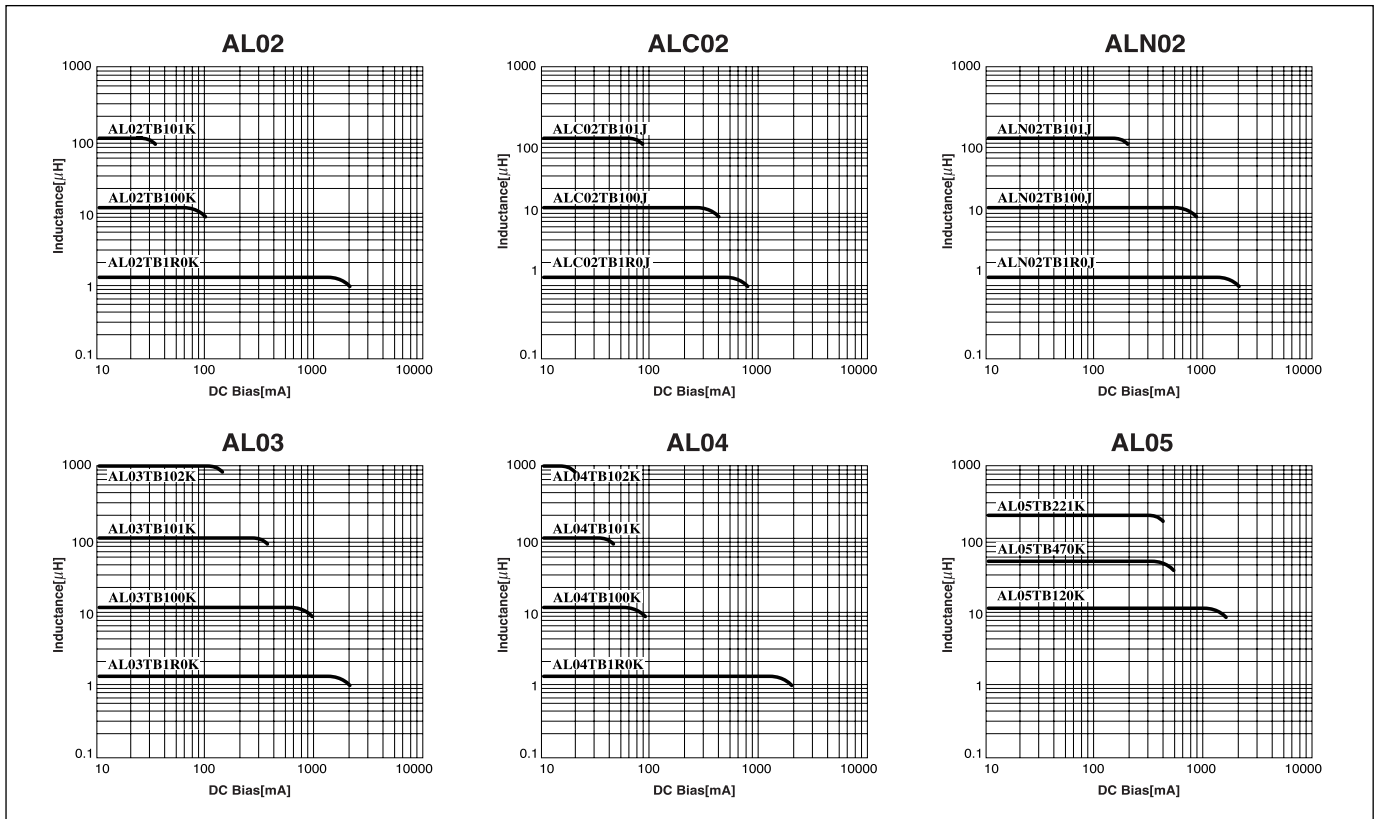


LEADED INDUCTORS

● Temperature Characteristics (Measured by HP4284A + HP42841A)

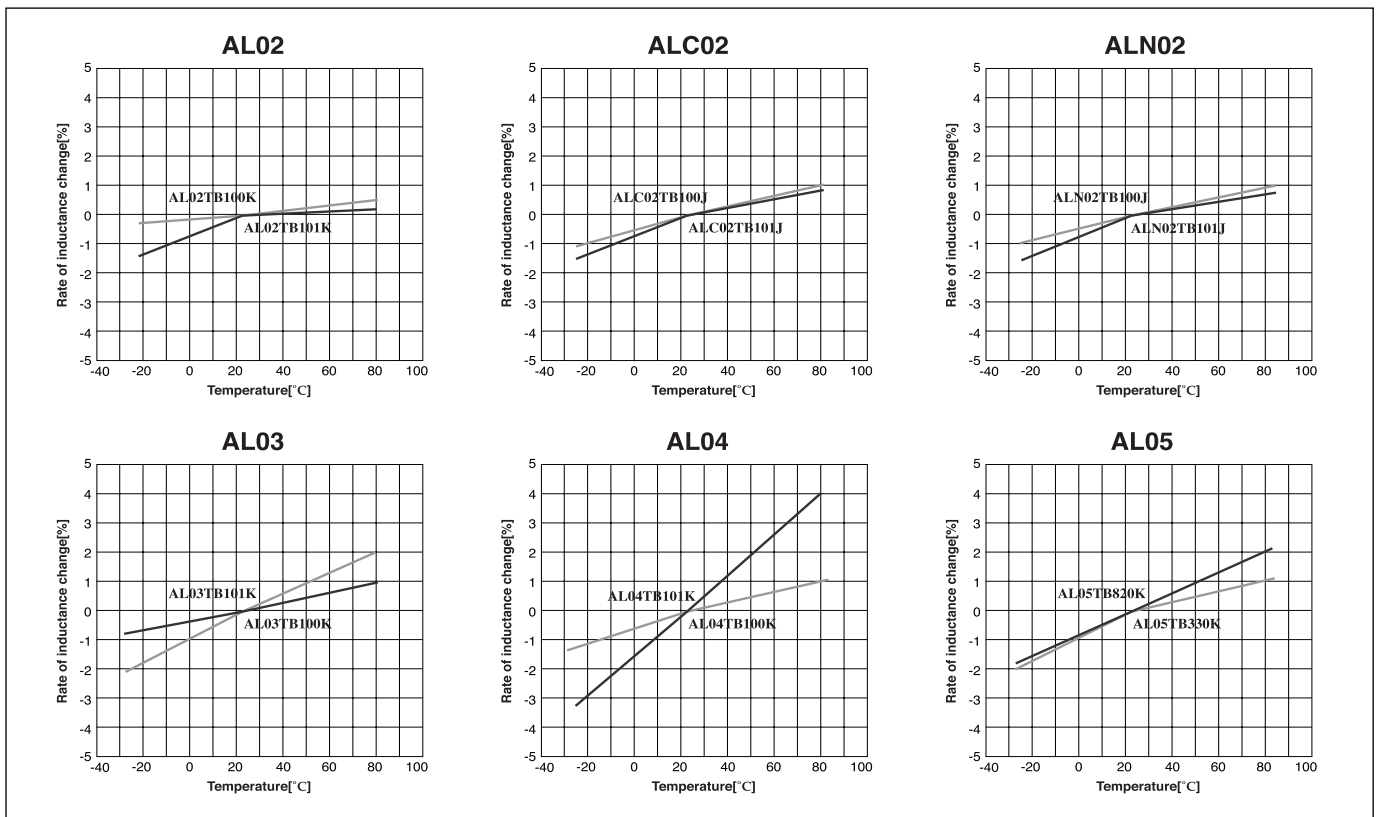

ELECTRICAL CHARACTERISTICS

- Q-Characteristics(Measured by HP 4285A + HP 42851A)

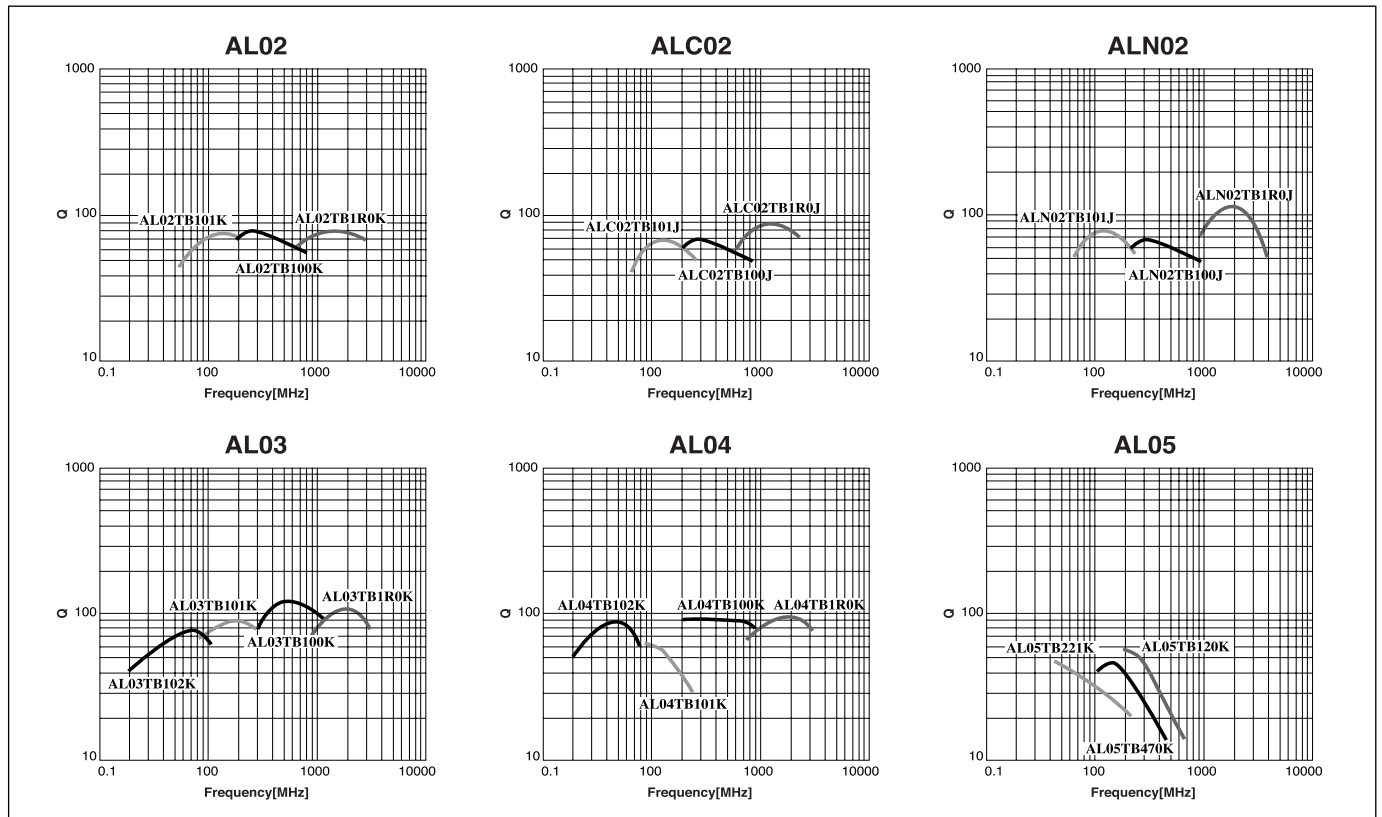

RELIABILITY

Item	Specified Value			Test Methods and Remarks												
	AL02, AL03 Type	AL04 Type	AL05 Type													
1. Operating Temperature Range	-25 ~ +85°C			Including self-generated heat.												
2. Storage Temperature Range	-40 ~ +85°C															
3. Q	Within the specified tolerance			Measuring equipment: LCR meter(HP4285A+42851A or its equivalent) Measuring frequency: Specified frequency												
4. Self Resonant Frequency	Within the specified tolerance			Measuring equipment: (Dip meter or its equivalent)												
5. DC Resistance	Within the specified tolerance			Measuring equipment: m+J80Ω Hi Tester(3226 or its equivalent)												
6. DC Bias Characteristics	ΔL/L → Within -10%			Measure inductance with application of rated current using LCR meter to compare it with the initial value.												
7. Temperature Characteristics	ΔL/L → Within ±5%			Change of maximum inductance deviation in step 1 to 5 <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20</td> </tr> <tr> <td>2</td> <td>-25 (Minimum operating temperature)</td> </tr> <tr> <td>3</td> <td>20 (Reference temperature)</td> </tr> <tr> <td>4</td> <td>+85 (Maximum operating temperature)</td> </tr> <tr> <td>5</td> <td>20</td> </tr> </tbody> </table>	Step	Temperature(°C)	1	20	2	-25 (Minimum operating temperature)	3	20 (Reference temperature)	4	+85 (Maximum operating temperature)	5	20
Step	Temperature(°C)															
1	20															
2	-25 (Minimum operating temperature)															
3	20 (Reference temperature)															
4	+85 (Maximum operating temperature)															
5	20															
8. Inductance	Within the Specified tolerance			Measuring equipment: LCR meter (HP4285A+42851A or its equivalent) Measuring frequency: Specified frequency												
9. Rated Current	Within the specified tolerance			The maximum DC value having inductance decrease within 10% and temperature increase within 20°C by the application of DC bias												
10. Terminal Strength	Tensile	No abnormality such as cutoff or looseness of lead		Apply the stated tensile force progressively in the direction to draw terminal <table border="1"> <thead> <tr> <th>Nominal wire diameter(mm)</th> <th>Tensile force(N)</th> <th>Duration(S)</th> </tr> </thead> <tbody> <tr> <td>0.43 < Ød ≤ 0.65</td> <td>25</td> <td>5</td> </tr> </tbody> </table>	Nominal wire diameter(mm)	Tensile force(N)	Duration(S)	0.43 < Ød ≤ 0.65	25	5						
	Nominal wire diameter(mm)	Tensile force(N)	Duration(S)													
0.43 < Ød ≤ 0.65	25	5														
Bending	No abnormality such as cutoff or looseness of lead		Suspend a mass at the terminal, incline the body through angle of 90° and return it to initial position is This operation is done over a period of 2~3 sec. Then a second bend in the opposite direction shall be made. Number of bends: Two times <table border="1"> <thead> <tr> <th>Nominal wire diameter(mm)</th> <th>Bending force(N)</th> <th>Mass weight(kg)</th> </tr> </thead> <tbody> <tr> <td>0.3 < Ød ≤ 0.5</td> <td>2.5</td> <td>0.25</td> </tr> <tr> <td>0.5 < Ød ≤ 0.8</td> <td>5</td> <td>0.5</td> </tr> </tbody> </table>	Nominal wire diameter(mm)	Bending force(N)	Mass weight(kg)	0.3 < Ød ≤ 0.5	2.5	0.25	0.5 < Ød ≤ 0.8	5	0.5				
Nominal wire diameter(mm)	Bending force(N)	Mass weight(kg)														
0.3 < Ød ≤ 0.5	2.5	0.25														
0.5 < Ød ≤ 0.8	5	0.5														
11. Body Strength	No abnormality such as damage			AL02 Applied force: 30N Duration: 10 sec. Speed: Shall attain to specified force in 2 sec. AL03, 04, 05 Applied force: 50N Duration: 10 sec. Speed: Shall attain to specified force in 2 sec.												
12. Resistance to vibration	ΔL/L → Within ±5% Q → 30 min.	ΔL/L → Within ±5% Q/Q → Within ±10%	ΔL/L → Within ±5% Q → 15 min.	According to JIS C 5102 clause 8.2 Vibration type: A Duration: 2 hrs each in X, Y and Z directions Total: 6 hrs Frequency range: 10 to 55 to 10 Hz(1min.) Amplitude: 1.5 mm Mounting method: Soldering onto printed board Recovery: At least 1 hr of recovery under the standard condition after the test, followed by the measurement within 2 hrs.												
13. Resistance to Shock	No significant abnormality in appearance	No significant abnormality in appearance	No significant abnormality in appearance	Drop test impact material: Concrete of vinyl tile Height: 1m Total number of drops: 10 times												
14. Solderability	At least 75% of terminal electrode is covered by new solder			Solder temperature: 230 ± 5°C Duration: 3 ± 0.5 sec.												
15. Resistance to Soldering Heat	No significant abnormality in appearance	No significant abnormality in appearance	ΔL/L → Within ±5% Q → 15 min.	Solder temperature: 270 ± 5°C Duration: 5 ± 0.5 sec. Immersed conditions: inserted into substrate with t = 1.6 mm Recovery: At least 1 hr of recovery under the standard condition after the test, followed by the measurement within 2 hrs.												

RELIABILITY


Item	Specified Value			Test Methods and Remarks															
	AL02, AL03 Type	AL04 Type	AL05 Type																
16. Resistance to Solvent	Please avoid the ultrasonic cleaning of this product.																		
17. Thermal shock	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q \rightarrow 30min.	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q/Q \rightarrow Within $\pm 30\%$	$\Delta L/L \rightarrow$ Within $\pm 5\%$ Q \rightarrow 15min.	Conditions for 1 cycle <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> <th>Duration(min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25^{+0}_{-3}</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>within 3</td> </tr> <tr> <td>3</td> <td>$+85^{+2}_{-0}$</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>within 3</td> </tr> </tbody> </table> Number of cycles: 5 cycles Recovery: At least 1 hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2 hrs.	Step	Temperature(°C)	Duration(min)	1	-25^{+0}_{-3}	30 ± 3	2	Room temperature	within 3	3	$+85^{+2}_{-0}$	30 ± 3	4	Room temperature	within 3
Step	Temperature(°C)	Duration(min)																	
1	-25^{+0}_{-3}	30 ± 3																	
2	Room temperature	within 3																	
3	$+85^{+2}_{-0}$	30 ± 3																	
4	Room temperature	within 3																	
18. Damp Heat	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q \rightarrow 30min.	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q/Q \rightarrow Within $\pm 30\%$	$\Delta L/L \rightarrow$ Within $\pm 5\%$ Q \rightarrow 15min.	- Temperature: $40 \pm 2^\circ\text{C}$ - Humidity: 90 to 95% RH - Duration: 1000hrs - Recovery: At least 1 hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2 hrs.															
19. Loading under Tensile Damp Heat	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q \rightarrow 30min.	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q/Q \rightarrow Within $\pm 30\%$	$\Delta L/L \rightarrow$ Within $\pm 5\%$ Q \rightarrow 15min.	- Temperature: $40 \pm 2^\circ\text{C}$ - Humidity: 90 to 95% RH - Duration: 1000hrs - Applied current: Rated current - Recovery: At least 1 hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2 hrs.															
20. Loading at High Temperature	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q \rightarrow 30min.	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q/Q \rightarrow Within $\pm 30\%$	$\Delta L/L \rightarrow$ Within $\pm 5\%$ Q \rightarrow 15min.	- Temperature: $85 \pm 2^\circ\text{C}$ - Duration: 1000hrs - Applied current: Rated current - Recovery: At least 1 hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2 hrs.															
21. Low Temperature Life Test	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q \rightarrow 30min.	$\Delta L/L \rightarrow$ Within $\pm 10\%$ Q/Q \rightarrow Within $\pm 30\%$	$\Delta L/L \rightarrow$ Within $\pm 5\%$ Q \rightarrow 15min.	- Temperature: $-25 \pm 2^\circ\text{C}$ - Duration: 1000hrs - Applied current: Rated current - Recovery: At least 1 hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2 hrs.															

Note on standard condition: "standard condition" referred to herein is defined as follows.

5 to 35°C of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure.

When there are questions concerning measurement results: In order to provide correlation data, the test shall be conducted under condition of $20 \pm 2^\circ\text{C}$ of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure Unless otherwise specified, all the tests are conducted under the "standard condition"

■ PACKING

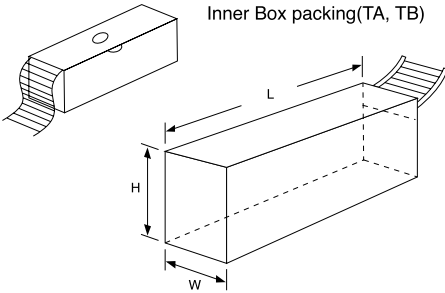Type	Taping Lead Style	Inner Box		Out Box			Item
		Size(m/m) (W × H × L)	Quantity	Size(m/m) (W × H × L)	Quantity	Weight (100μH)	
 Inner Box packing(TA, TB)	TA	26m/m	50 × 65 × 252	2,000	285 × 260 × 455	54,000	AL02
							ALC02
							ALN02
	TB	52m/m	70 × 65 × 265	2,500	285 × 250 × 455	45,000	AL02
							ALC02, ALN02
TR	52m/m	280 × 280 (A × A)	5,000	460 × 320 × 600	50,000	14kg	AL02
14.29 to 15.88 Hole (9/10" to 5/8")	4,000	14kg	AL03				
	2,500	16kg	AL04				