

June 1999

LM325 Dual Voltage Regulator

## LM325 Dual Voltage Regulator


### General Description

This dual polarity tracking regulator is designed to provide balanced positive and negative output voltages at current up to 100 mA, and is set for  $\pm 15V$  outputs. Input voltages up to  $\pm 30V$  can be used and there is provision for adjustable current limiting. The device is available in two package types to accommodate various power requirements and temperature ranges.


### Features

- $\pm 15V$  tracking outputs
- Output current to 100 mA
- Output voltage balanced to within 2%
- Line and load regulation of 0.06%
- Internal thermal overload protection
- Standby current drain of 3 mA
- Externally adjustable current limit
- Internal current limit

### Schematic and Connection Diagrams

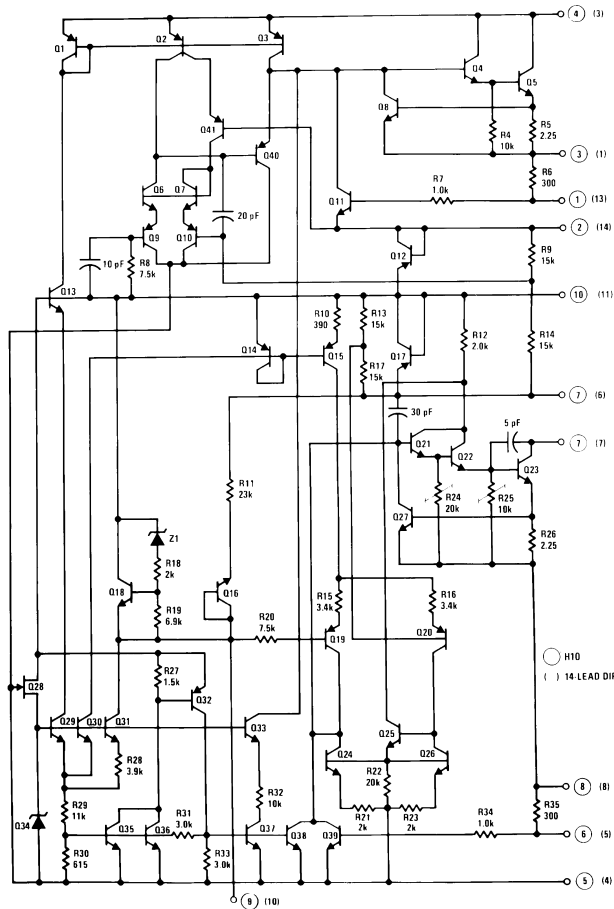

### Metal Can Package



DS007776-3

Case connected to  $-V_{IN}$


**Top View**  
**Order Number LM325H**  
**See NS Package Number H10C**

DS007776-1

<b>Absolute Maximum Ratings</b> (Note 1)		Output Short-Circuit Duration (Note 4)	Continuous		
If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.		<b>Operating Conditions</b>			
Input Voltage	±30V	Operating Free Temperature Range	0°C to +70°C		
Forced $V_{O^+}$ (Min) (Note 2)	-0.5V	Storage Temperature Range	-65°C to +150°C		
Forced $V_{O^-}$ (Max) (Note 2)	+0.5V	Lead Temperature (Soldering, 10 sec.)	300°C		
Power Dissipation (Note 3)	$P_{MAX}$				
<b>Electrical Characteristics</b>					
Parameter	Conditions	Min	Typ	Max	Units
Output Voltage	$T_j = 25^\circ\text{C}$	14.5	15	15.5	V
Input-Output Differential		2.0			V
Line Regulation	$V_{IN} = 18\text{V to }30\text{V}$ , $I_L = 20\text{ mA}$ , $T_j = 25^\circ\text{C}$		2.0	10	mV
Line Regulation Over Temperature Range	$V_{IN} = 18\text{V to }30\text{V}$ , $I_L = 20\text{ mA}$ ,		20	20	mV
Load Regulation	$I_L = 0\text{ mA to }50\text{ mA}$ , $V_{IN} = \pm 30\text{V}$ , $T_j = 25^\circ\text{C}$		3.0	10	mV
$V_{O^+}$			5.0	10	mV
$V_{O^-}$					
Load Regulation Over Temperature Range	$I_L = 0\text{ mA to }50\text{ mA}$ , $V_{IN} = \pm 30\text{V}$		4.0	20	mV
$V_{O^+}$			7.0	20	mV
$V_{O^-}$					
Output Voltage Balance	$T_j = 25^\circ\text{C}$			±300	mV
Output Voltage Over Temperature Range	$P \leq P_{MAX}$ , $0 \leq I_O \leq 50\text{ mA}$ , $18\text{V} \leq  V_{IN}  \leq 30$	14.27		15.73	V
Temperature Stability of $V_O$			±0.3		%
Short Circuit Current Limit	$T_j = 25^\circ\text{C}$		260		mA
Output Noise Voltage	$T_j = 25^\circ\text{C}$ , BW = 100 – 10 kHz		150		µVrms
Positive Standby Current	$T_j = 25^\circ\text{C}$		1.75	3.0	mA
Negative Standby Current	$T_j = 25^\circ\text{C}$		3.1	5.0	mA
Long Term Stability			0.2		%/kHr
Thermal Resistance Junction to Case (Note 5)					
LM325H			20		°C/W
Junction to Ambient	(Still Air)		215		°C/W
Junction to Ambient	(400 Lf/min Air Flow)		82		°C/W
Junction to Ambient	(Still Air)		90		°C/W
LM325N					
<p><b>Note 1:</b> "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur. Operating ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits.</p> <p><b>Note 2:</b> That voltage to which the output may be forced without damage to the device.</p> <p><b>Note 3:</b> Unless otherwise specified these specifications apply for <math>T_j = 0^\circ\text{C}</math> to <math>+125^\circ\text{C}</math> on LM325, <math>V_{IN} = \pm 20\text{V}</math>, <math>I_L = 0\text{ mA}</math>, <math>I_{MAX} = 100\text{ mA}</math>, <math>P_{MAX} = 2.0\text{W}</math> for the H10 Package.</p> <p><b>Note 4:</b> If the junction temperature exceeds <math>150^\circ\text{C}</math>, the output short circuit duration is 60 seconds.</p> <p><b>Note 5:</b> Without a heat sink, the thermal resistance junction to ambient of the H10 Package is about <math>155^\circ\text{C/W}</math>. With a heat sink, the effective thermal resistance can only approach the junction to case values specified, depending on the efficiency of the sink.</p>					


## Typical Performance Characteristics

Load Regulation




DS007776-11

Standby Current Drain




DS007776-12

Regulator Dropout Voltage for Positive Regulator




DS007776-13

Regulator Dropout Voltage for Negative Regulator




DS007776-14

Peak Output Current vs Junction Temperature




DS007776-15

LM325 Maximum Average Power Dissipation vs Ambient Temperature




DS007776-17

Load Transient Response for Positive Regulator




DS007776-20

Load Transient Response for Negative Regulator



DS007776-21


Line Transient Response for Positive Regulator



DS007776-22

### Typical Performance Characteristics (Continued)


Line Transient Response for Negative Regulator



TIME (10µs/DIV)


DS007776-23

Ripple Rejection



DS007776-24


Output Impedance vs Frequency



DS007776-25

### Typical Applications


Basic Regulator†††

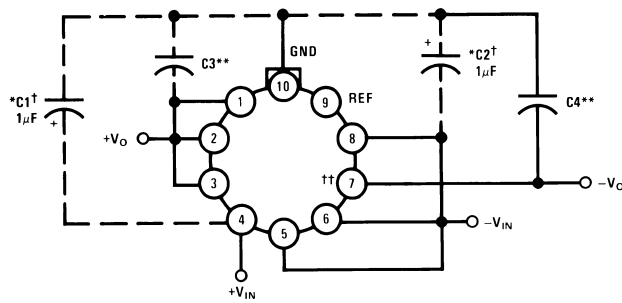

DS007776-6

Typical Applications (Continued)

2.0 Amp Boosted Regulator with Current Limit

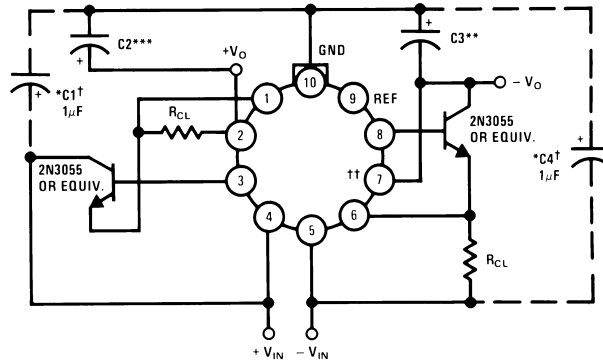

DS007776-7

Note: Metal can (H) packages shown.

$$I_{CL} = \frac{\text{Current Limit Sense Voltage (See Curve)}}{R_{CL}}$$

†Solid tantalum

††Short pins 6 and 7 on dip


†††R<sub>CL</sub> can be added to the basic regulator between pins 6 and 5, 1 and 2 to reduce current limit.

\*Required if regulator is located an appreciable distance from power supply filter.

\*\*Although no capacitor is needed for stability, it does help transient response. (If needed use 1 μF electrolytic.)

\*\*\*Although no capacitor is needed for stability, it does help transient response. (If needed use 10 μF electrolytic.)

Positive Current Dependent Simultaneous Current Limiting

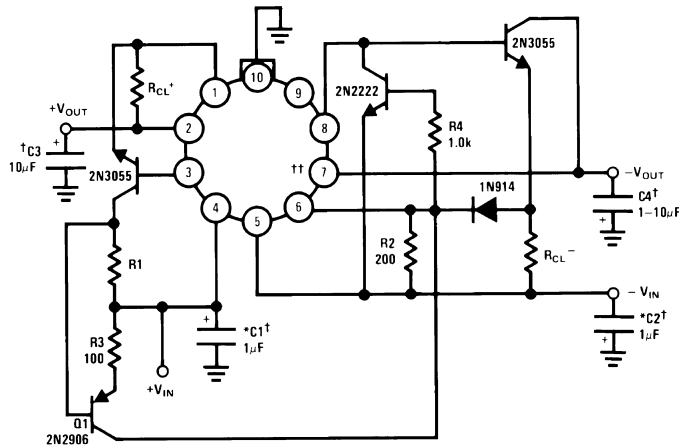

DS007776-8

$$I_{CL}^+ = \frac{\frac{V_{SENSE\_NEG}}{2} + V_{BEQ1}}{R1}$$


$$I_{CL}^+ = \frac{V_{SENSE\_NEG} + V_{DIODE}}{R_{CL}^-}$$

$$R_{CL}^+ = \frac{V_{SENSE}^+}{1.1 I_{CL}^+}$$

I<sub>CL</sub><sup>+</sup> Controls Both Sides of the Regulator.

**Typical Applications** (Continued)

**Boosted Regulator With Foldback Current Limit**

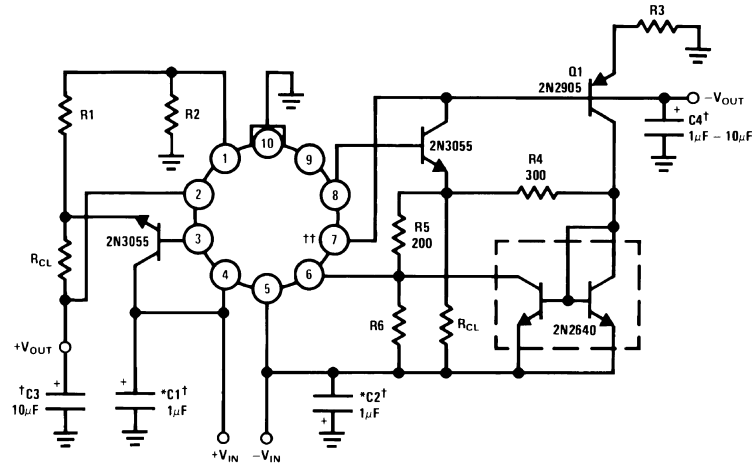


DS007776-9

Positive Reg.  
 $I_{MAX} = 2.0A$   
 $I_{SC} = 750\text{ mA}$   
 $@T_A = 25^\circ C$   
 $+V_{IN} = +25V$   
 Negative Reg.  
 $I_{MAX} = 2.0A$   
 $I_{SC} = 750\text{ mA}$   
 $@T_A = 25^\circ C$   
 $-V_{IN} = -25V$

**Resistor Values**

	125	126
R1	18	20
R2	310	180
R3	2.4k	1.35k
R6	300	290
R <sub>CL</sub>	0.7	0.9

Typical Applications (Continued)

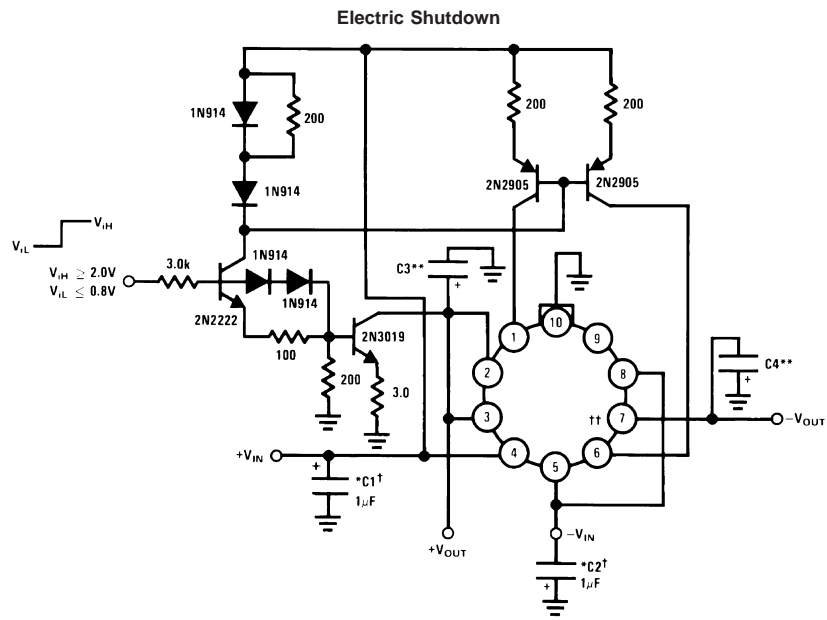

DS007776-10


†Solid tantalum

††Short pins 6 and 7 on dip

\*Required if regulator is located an appreciable distance from power supply filter.

\*\*Although no capacitor is needed for stability, it does help transient response. (If needed use 1  $\mu$ F electrolytic.)

**Physical Dimensions** inches (millimeters) unless otherwise noted

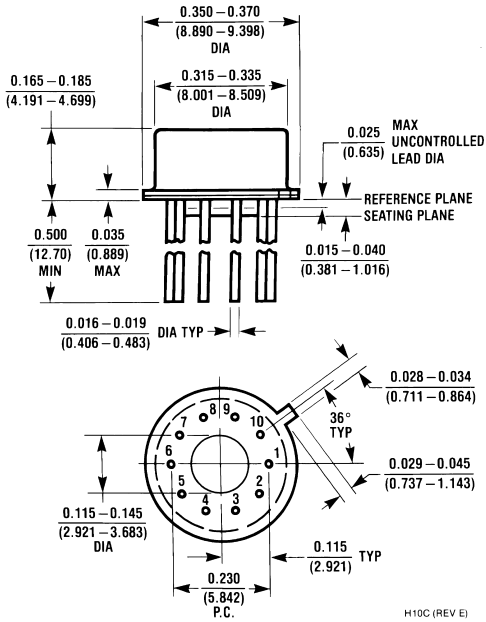

**Metal Can Package (H)  
Order Number LM325H  
NS Package Number H10C**

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**National Semiconductor Corporation**  
Americas  
Tel: 1-800-272-9959  
Fax: 1-800-737-7018  
Email: support@nsc.com

**National Semiconductor Europe**  
Fax: +49 (0) 1 80-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 1 80-530 85 85  
English Tel: +49 (0) 1 80-532 78 32  
Français Tel: +49 (0) 1 80-532 93 58  
Italiano Tel: +49 (0) 1 80-534 16 80

**National Semiconductor Asia Pacific Customer Response Group**  
Tel: 65-2544466  
Fax: 65-2504466  
Email: sea.support@nsc.com

**National Semiconductor Japan Ltd.**  
Tel: 81-3-5639-7560  
Fax: 81-3-5639-7507

www.national.com