

# AIMB-562 KIOSK

**LGA 775 Core™ 2 Duo  
MicroATX with Dual VGA/  
LVDS, 10 COM, and LAN**

**NEW**



CE FCC

## Features

- Intel® 945G/945GC chipset supports 533/800/1066 MHz FSB
- Dual channel DDR2 533/667 SDRAM up to 4 GB
- Supports dual VGA and 24-bit LVDS panel, dual channel 3 W amplifier
- Supports 10 serial ports, 8 USB, 16-bit GPIO, TPM 1.2 (optional)
- Supports Embedded Software API and Utility

### Software API:



SMBus



H/W Monitor



GPIO



Watchdog

### Utility:



BIOS flash



eSOS



Monitoring



Flash Lock




Embedded  
Security ID

## Specifications

Processor System	CPU (65 nm/90 nm)	Intel Core 2 Duo	Intel Pentium Dual-Core	Intel Pentium 4	Intel Celeron
	Max. Speed	E7400 2.8 GHz	E2200 2.2 GHz	651 3.4 GHz	440 2.0 GHz
	L2 Cache	4 MB	1 MB	2 MB	512 KB
	Chipset	Intel 945G/945GC + ICH7			
	BIOS	Award 16 Mbit, SPI			
	Front Side Bus	533/800/1066 MHz			
Expansion Slot	PCIe x16	-			
	PCIe x1	250 MB per direction, 1 slot			
	PCI	32-bit/33 MHz, 2 slots			
Memory	Technology	Dual channel DDR2 533/667 MHz			
	Max. Capacity	4 GB			
	Socket	2 x 240-pin DIMM			
Graphics	Embedded	Intel GMA 950 sharing 224 MB system memory			
	LVDS	Supports single channel 24-bit/dual channel 48-bit LVDS, via Chronitel 7308B SDVO transmitter			
	2nd VGA	Supports 2nd CRT, via Chronitel 7317 SDVO transmitter			
	Dual Display	CRT + LVDS, CRT + CRT			
Ethernet	Interface	10/100/1000 Mbps			
	Controller	GbE LAN: Realtek 8111C			
	Connector	RJ-45 x 1			
SATA II	Max. Data Transfer Rate	300 MB/s			
	Channel	2			
EIDE	Mode	ATA 100/66/33			
	Channel	1 (max. 2 devices)			
I/O Interface	VGA	2			
	USB	8			
	Audio	2 (Line-out, Mic-in)			
	Serial	10 (8 of RS-232; 2 of RS-232/422/485 support auto flow control)			
	Parallel	1 (SPP/EPP/ECP)			
	FDD	-			
	PS/2	2 (1 x keyboard and 1 x mouse)			
	GPIO	16-bit GPIO			
Watchdog Timer	Output	System reset			
	Interval	Programmable 1 ~ 255 sec/min			
Power Requirement	Power On	Intel Core 2 Duo E4300 1.8 GHz FSB 800 MHz, 1 GB DDR2 667 SDRAM			
		3.3 V	5 V	12 V	5 Vsb
		1.02 A	4 A	2.35 A	0.26 A
Environment		Operating		Non-Operating	
	Temperature	0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution		-20 ~ 70° C (-4 ~ 158° F)	
Physical Characteristics	Dimensions (W x D)	244 x 244 mm (9.6" x 9.6")			

## Board Diagram

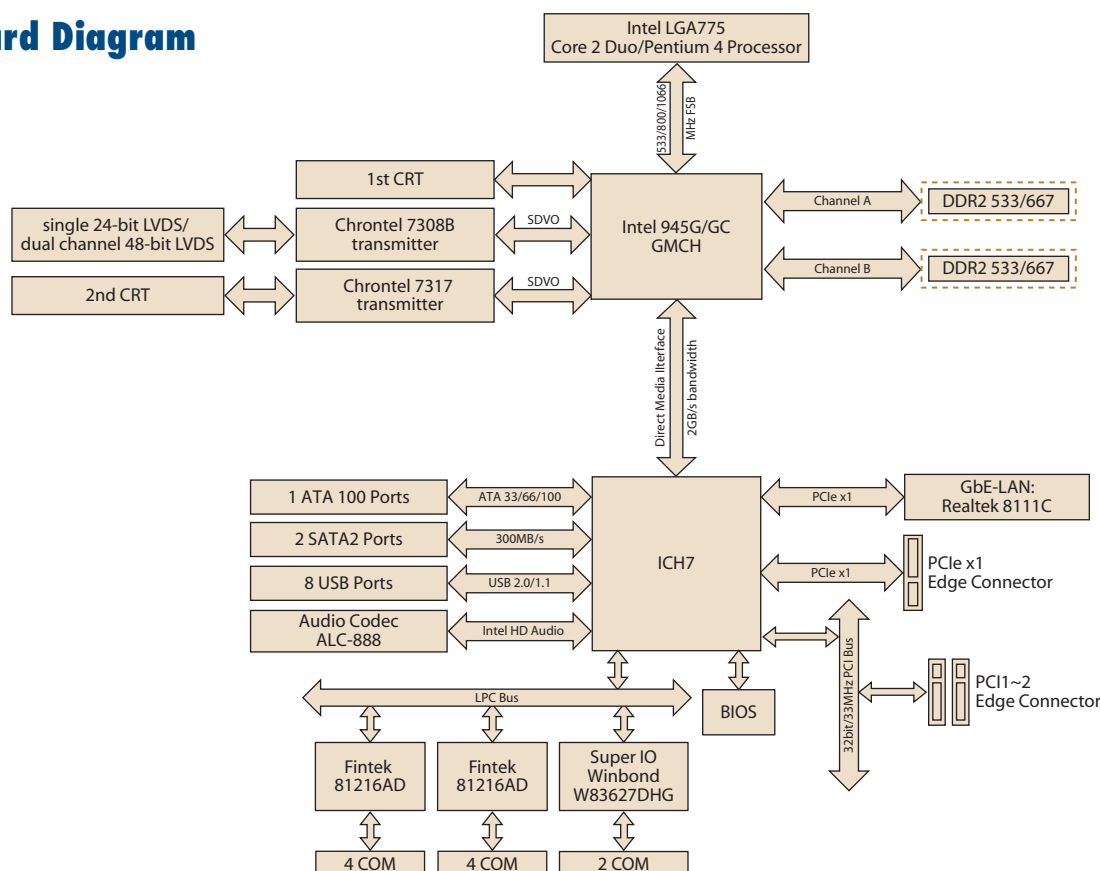

## Ordering Information

Part Number	Chipset	Display	COM	GbE LAN
AIMB-562VG-KSA1E	945G	2 CRT/LVDS	10	1
AIMB-562VG-GRA1E	945G	2 CRT	10	1
AIMB-562L-KSA1E	945GC	1 CRT	10	1

## Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card for 3 PCI expansion

## Bracket View



AIMB-562VG-KSA1E  
AIMB-562VG-GRA1E

## Packing List

Description	Quantity
IDE HDD cable	x 1
Serial ATA HDD data cable	x 2
Serial ATA HDD power cable	x 2
COM port cable kit	x 4
I/O port bracket	x 1
Startup manual	x 1
Utility CD	x 1

## Accessories

Part Number	Description
1750000334	LGA775 CPU cooler (115 W)
1960022033T000	LGA775 CPU cooler for 2U chassis
1700002314	USB cable with four ports, 30.5 cm
1700002204	USB cable with dual ports, 27 cm
1700003195	USB cable with dual ports, 17.5 cm

# Value-Added Software Services

**Software API:** An interface that defines the ways by which an application program may request services from libraries and/or operating systems. Provides not only the underlying drivers required but also a rich set of user-friendly, intelligent and integrated interfaces, which speeds development, enhances security and offers add-on value for Advantech platforms. It plays the role of catalyst between developer and solution, and makes Advantech embedded platforms easier and simpler to adopt and operate with customer applications.

## Software API

### Control



**GPIO**

General Purpose Input/Output is a flexible parallel interface that allows a variety of custom connections. allows users to monitor the level of signal input or set the output status to switch on/off the device. Our API also provide Programmable GPIO, allows developers to dynamically set the GPIO input or output status



**SMBus**

SMBus is the System Management Bus defined by Intel® Corporation in 1995. It is used in personal computers and servers for low-speed system management communications. The SMBus API allows a developer to interface a embedded system environment and transfer serial messages using the SMBus protocols, allowing multiple simultaneous device control.



**I2C**

I2C is a bi-directional two wire bus that was developed by Philips for use in their televisions in the 1980s. The I2C API allows a developer to interface a embedded system environment and transfer serial messages using the I2C protocols, allowing multiple simultaneous device control.

### Display



**Brightness Control**

The Brightness Control API allows a developer to interface Embedded device to easily control brightness.



**Backlight**

The Backlight API allows a developer to control the backlight (screen) on/off in Embedded Device.

### Monitor



**Watchdog**

A watchdog timer (WDT) is a device that performs a specific operation after a certain period of time if something goes wrong and the system does not recover on its own. A watchdog timer can be programmed to perform a warm boot (restarting the system) after a certain number of seconds.



**Hardware Monitor**

The Hardware Monitor (HWM) API is a system health supervision API that inspects certain condition indexes, such as fan speed, temperature and voltage.



**Hardware Control**


The Hardware Control API allows developers to set the PWM (Pulse Width Modulation) value to adjust Fan Speed or other devices; can also be used to adjust the LCD brightness.

### Power Saving



**CPU Speed**


Make use of Intel SpeedStep technology to save the power consumption. The system will automatically adjust the CPU Speed depend on the system loading.



**System Throttling**

Refers to a series of methods for reducing power consumption in computers by lowering the clock frequency. These API allow user to lower the clock from 87.5% to 12.5%.

## Software Utility



**BIOS Flash**

The BIOS Flash utility allows customers to update the flash ROM BIOS version, or use it to back up current BIOS by copying it from the flash chip to a file on customers' disk. The BIOS Flash utility also provides a command line version and API for fast implementation into customized applications.



**Embedded Security ID**

The embedded application is the most important property of a system integrator. It contains valuable intellectual property, design knowledge and innovation, but it is easy to be copied! Embedded Security ID utility which provides reliable security functions for customers to secure their application data within embedded BIOS.



**Monitoring**

The Monitoring is a utility for customer to monitor the system health, like Voltage, CPU and System temperature and FAN speed. These items are important to a device, if the critical errors happen and not be solved immediately, a permanent damage may be caused.



**eSOS**

The eSOS is a small OS stored in BIOS ROM. It will boot up in case of main OS crash. It will diagnose the hardware status, and then send an e-mail to administrator. The eSOS also provide Remote Connection: Telnet server and FTP server for administrator to rescue the system.



**Flash Lock**

Flash Lock is a mechanism to bind the Board and CF card (SQFlash) together. User can "Lock" SQFlash via Flash Lock function and "Unlock" by BIOS while booting. A locked SQFlash cannot be read by any card reader or boot from other platforms without a BIOS with "Unlock" feature.