



## **SAW Components**

### **SAW Rx 2in1 filter**

<b>Series/type:</b>	<b>B4236</b>
<b>Ordering code:</b>	<b>B39811B4236H410</b>
<b>Date:</b>	<b>July 06, 2007</b>
<b>Version:</b>	<b>2.0</b>




<b>SAW Components</b>	<b>B4236</b>
<b>SAW Rx 2in1 filter</b>	<b>769.0 / 809.5 MHz</b>

Data sheet




**Application**

- Low-loss 2in1 RF filter for Trunked Radio
- Device with two integrated Rx filters
- Low amplitude ripple
- Usable passband:  
 Filter 1 : 31.0 MHz  
 Filter 2 : 14.0 MHz
- No matching network required for operation at 50 Ω




**Features**

- Package size 3.0 x 2.5 x 0.98 mm<sup>3</sup>
- Package code QCC8E
- RoHS compatible
- Approx. weight 0.008 g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**

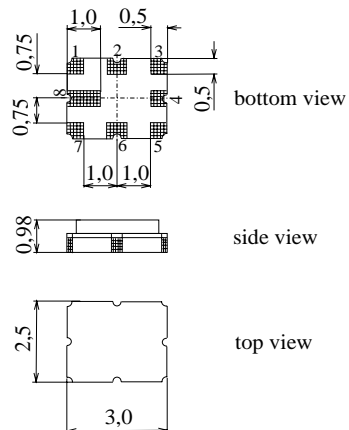

**Pin configuration**

- 1 Input (filter 1)
- 7 Output (filter 1)
- 3 Input (filter 2)
- 5 Output (filter 2)
- 2,6 Ground
- 4,8 Case ground

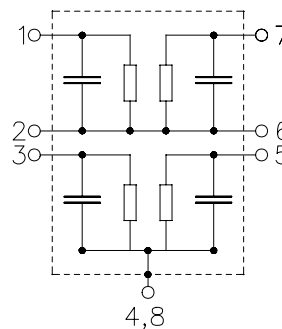



<b>SAW Components</b>	<b>B4236</b>
<b>SAW Rx 2in1 filter</b>	<b>769.0 / 809.5 MHz</b>

Data sheet



**Characteristics of Filter 1**

Temperature range for specification:  $T = -30 \dots +70 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ } \Omega$   
 Terminating load impedance:  $Z_L = 50 \text{ } \Omega$

		min.	typ. @25°C	max.	
<b>Center frequency</b>	$f_C$	—	809.5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	—	2.3	3.3 <sup>1)</sup>	dB
	794.0 ... 825.0 MHz				
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0.9	1.9 <sup>2)</sup>	dB
	794.0 ... 825.0 MHz				
<b>Group delay ripple (p-p)</b>	$\Delta\tau$	—	27.0	75.0 <sup>3)</sup>	ns
	794.0 ... 825.0 MHz				
<b>Return loss (Input and Output)</b>		8.0	9.0	—	dB
	794.0 ... 825.0 MHz				
<b>Attenuation</b>	$\alpha$				
	0.0 ... 645.0 MHz	40	62	—	dB
	674.0 ... 735.0 MHz	30	56	—	dB
	735.0 ... 777.0 MHz	20	28	—	dB
	851.0 ... 884.0 MHz	20	28	—	dB
	884.0 ... 945.0 MHz	30	56	—	dB
	974.0 ... 1065.0 MHz	40	54	—	dB
	1065.0 ... 1564.5 MHz	20	42	—	dB
	1564.5 ... 1594.5 MHz	30	43	—	dB
	2326.5 ... 2371.5 MHz	36	41	—	dB
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-36	—	ppm/K

1) 2.8 dB at  $25 \pm 2 \text{ }^\circ\text{C}$ .

2) 1.4 dB at  $25 \pm 2 \text{ }^\circ\text{C}$ .

3) 50 ns at  $25 \pm 2 \text{ }^\circ\text{C}$ .



**SAW Components** **B4236**

**SAW Rx 2in1 filter** **769.0 / 809.5 MHz**

Data sheet



**Maximum ratings of Filter 1**

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T <sub>stg</sub>	-40/+85	°C	
DC voltage	V <sub>DC</sub>	5	V	
ESD voltage	V <sub>ESD</sub>	100 <sup>1)</sup>	V	machine model, 10 pulses
Source power (cw)	P <sub>s</sub>	15	dBm	source and load impedance 50 Ω

<sup>1)</sup> acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



SAW Components

B4236


SAW Rx 2in1 filter

769.0 / 809.5 MHz


Data sheet



### Transfer function of Filter 1

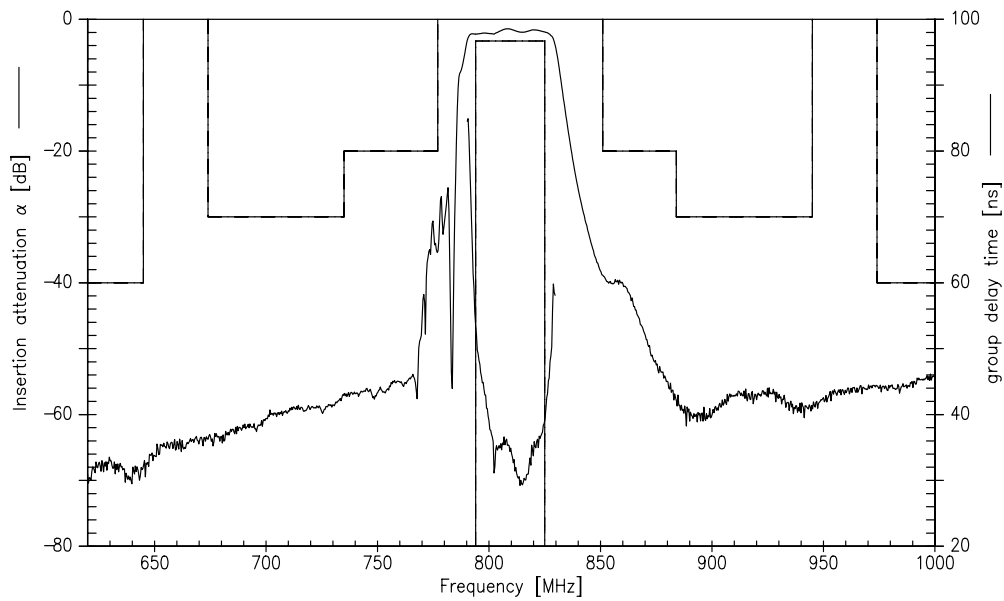

### Transfer function of Filter 1 (wideband)

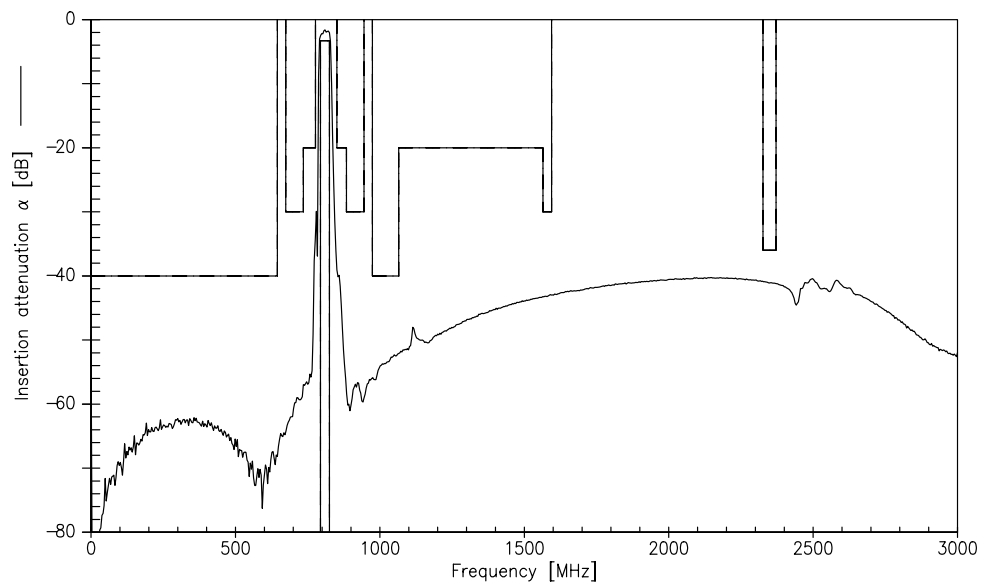



<b>SAW Components</b>	<b>B4236</b>
<b>SAW Rx 2in1 filter</b>	<b>769.0 / 809.5 MHz</b>

Data sheet



**Characteristics of Filter 2**

Temperature range for specification:  $T = -30 \dots +70 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ }\Omega$   
 Terminating load impedance:  $Z_L = 50 \text{ }\Omega$

		min.	typ. @25°C	max.	
<b>Center frequency</b>	$f_C$	—	769.0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	—	1.7	2.6 <sup>1)</sup>	dB
	762.0 ... 776.0 MHz				
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0.4	1.0	dB
	762.0 ... 776.0 MHz				
<b>Group delay ripple (p-p)</b>	$\Delta\tau$	—	22.0	50.0	ns
	762.0 ... 776.0 MHz				
<b>Return loss (Input and Output)</b>		12.0	13.5	—	dB
	762.0 ... 776.0 MHz				
<b>Attenuation</b>	$\alpha$				
	0.0 ... 431.0 MHz	57	60	—	dB
	431.0 ... 604.0 MHz	50	60	—	dB
	604.0 ... 690.0 MHz	30	58	—	dB
	690.0 ... 733.0 MHz	20	52	—	dB
	733.0 ... 752.0 MHz	9	22	—	dB
	804.0 ... 847.0 MHz	25	36	—	dB
	847.0 ... 892.7 MHz	30	52	—	dB
	892.7 ... 910.7 MHz	50	56	—	dB
	910.7 ... 995.3 MHz	47	54	—	dB
	995.3 ... 1121.0 MHz	42	52	—	dB
	1524.0 ... 1554.0 MHz	30	42	—	dB
	2286.0 ... 2331.0 MHz	30	39	—	dB
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-36	—	ppm/K

<sup>1)</sup> 2.4 dB at 25±2 °C.



<b>SAW Components</b>	<b>B4236</b>
<b>SAW Rx 2in1 filter</b>	<b>769.0 / 809.5 MHz</b>
Data sheet	<b>SMD</b>

**Maximum ratings of Filter 2**

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T <sub>stg</sub>	-40/+85	°C	
DC voltage	V <sub>DC</sub>	5	V	
ESD voltage	V <sub>ESD</sub>	100 <sup>1)</sup>	V	machine model, 10 pulses
Source power (cw)	P <sub>s</sub>	15	dBm	source and load impedance 50 Ω

<sup>1)</sup> acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



SAW Components

B4236


SAW Rx 2in1 filter

769.0 / 809.5 MHz


Data sheet



### Transfer function of Filter 2

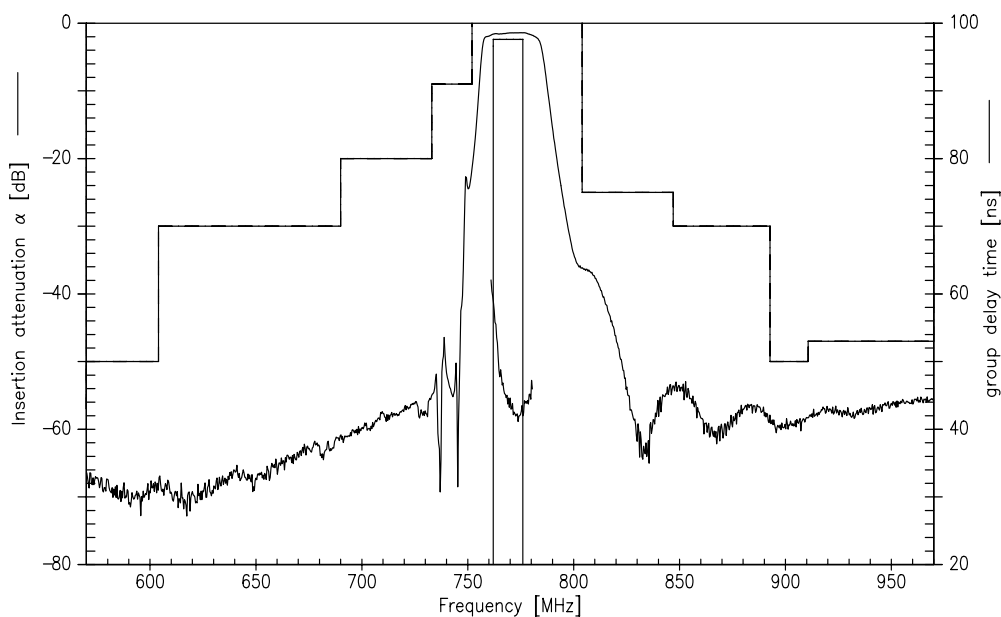

### Transfer function of Filter 2 (wideband)

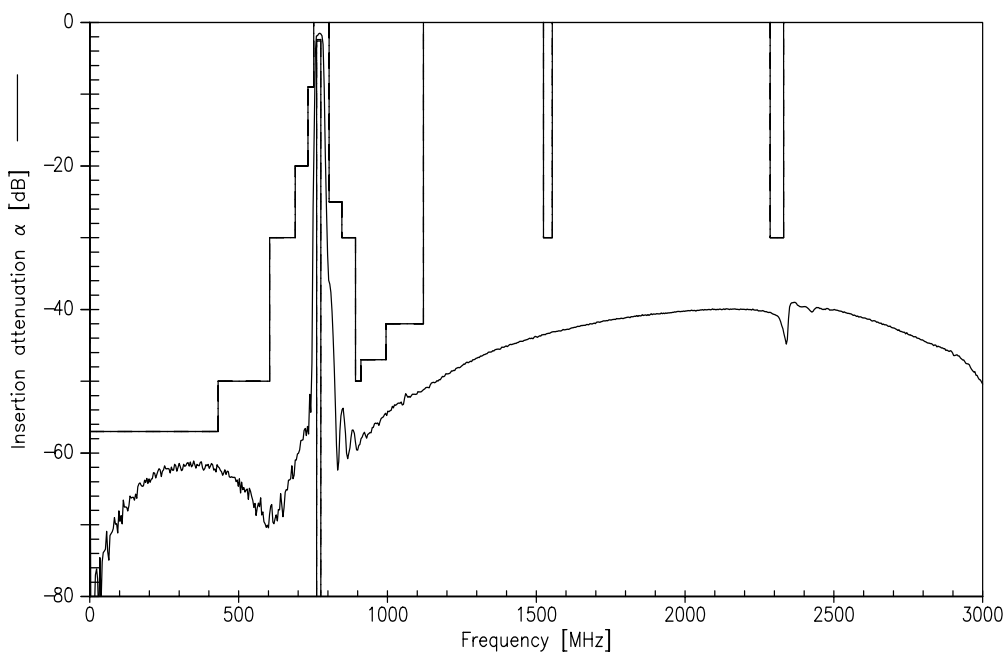

Please read *cautions and warnings* and *important notes* at the end of this document.





<b>SAW Components</b>	<b>B4236</b>
<b>SAW Rx 2in1 filter</b>	<b>769.0 / 809.5 MHz</b>
Data sheet	

### References

<b>Type</b>	B4236
<b>Ordering code</b>	B39811B4236H410
<b>Marking and package</b>	C61157-A7-A92
<b>Packaging</b>	F61074-V8174-Z000
<b>Date code</b>	L_1126
<b>S-parameters</b>	B4236_LB_NB.s2p B4236_LB_WB.s2p B4236_UB_NB.s2p B4236_UB_WB.s2p
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com) .

Published by EPCOS AG  
Surface Acoustic Wave Components Division  
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2007. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.



## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous")**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, Silver-Cap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).