



Pb-free

\*Pb-Free Part

THE POSSIBILITIES ARE INFINITE

FUJITSU

查询FAR-D5GD-942M50-D1DF"供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version 1.0gg	

**Table 1. Electrical Specification**

Item		Condition (MHz)	Specification (ver.1.0gg)			Unit	Remarks	
			Min	Typ	Max			
Tx to ANT	Insertion loss	880.4-914.6	-	2.2	3.0	dB (*1)		
	Pass band ripple	880.4-914.6	-	1.0	2.0		dB	
	VSWR	880.4-914.6	Tx	-	1.9	2.2	-	
			Ant	-	1.7	2.1	-	
	Input Power	880.4-914.6	29dBm, Ta=+55°C 10000h, CW			-		
Absolute attenuation	927.4-957.6	42	49	-	dB	(*2)		
	1574-1577	28	34	-	dB			
	1760-1830	20	28	-	dB			
	2640-2745	12	19	-	dB			
ANT to Rx	Insertion loss	925.4-959.6	-	2.5	3.5	dB (*1)		
	Pass band ripple	925.4-959.6	-	0.9	2.0		dB	
	Amplitude balance	925.4-959.6	-1.1	-0.5/ +0.5	+1.1	dB		
	Phase balance	925.4-959.6	-11	-6/ +4	+11	deg		
	VSWR	925.4-959.6	Ant	-	1.8	2.2	-	
			Rx	-	2.0	2.3	-	
Absolute attenuation	882.4-912.6	47	54	-	dB	(*2)		
Tx to Rx	Isolation	882.4-912.6	53	56	-	dB	(*2)	
		927.4-957.6	46	50	-	dB	(*2)	
Terminating Impedance	Tx port		50			Ohm	Single-ended	
	Rx port		100			Ohm	Differential	
	Ant port		50			Ohm	Single-ended	
Operating Temperature			-15 to +80			°C		
Device size (LxWxH)			3.0 x 2.5 x 0.7			mm		

(\*1) Specification of insertion loss excludes loss that comes from the test board. (Approximately 0.05dB)


(\*2) Integrated attenuation or isolation over +/-1.92MHz around the WCDMA channel center frequency



Pb-free Part  
零件号 FAR-D5GD-942M50-D1DF 供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version 1.0gg	

### Dimensions

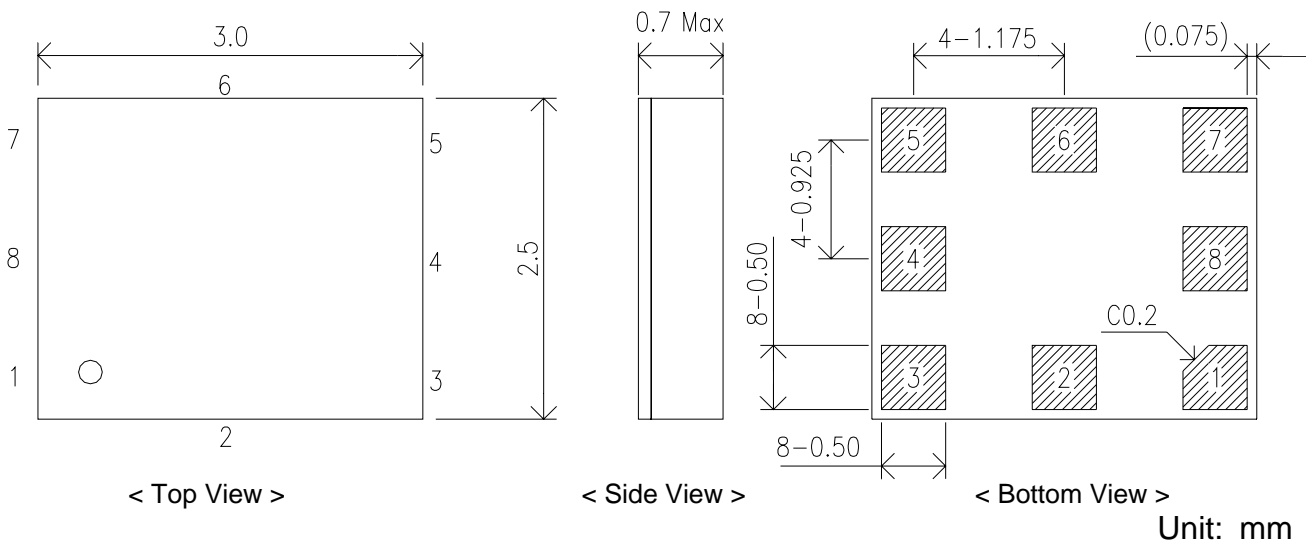

### Pin Configuration

Pin No.	Pin name	Description
1	Rx	Receiver Pin (balanced)
2	GND	Ground Pin
3	Tx	Transmitter Pin
4	GND	Ground Pin
5	GND	Ground Pin
6	ANT	Antenna Pin
7	GND	Ground Pin
8	Rx	Receiver Pin (balanced)


**Figure 1. Dimensions and Pin assignment**




Pb-free Part  
零件号: FAR-D5GD-942M50-D1DF 供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version 1.0gg	

### Evaluation Circuit

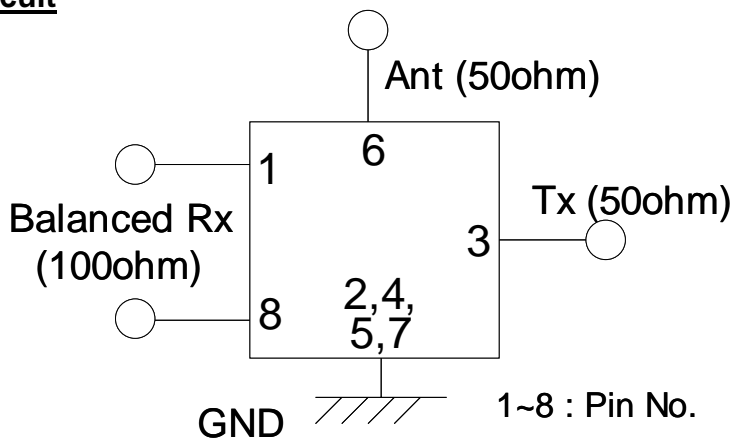

### Recommended foot print pattern

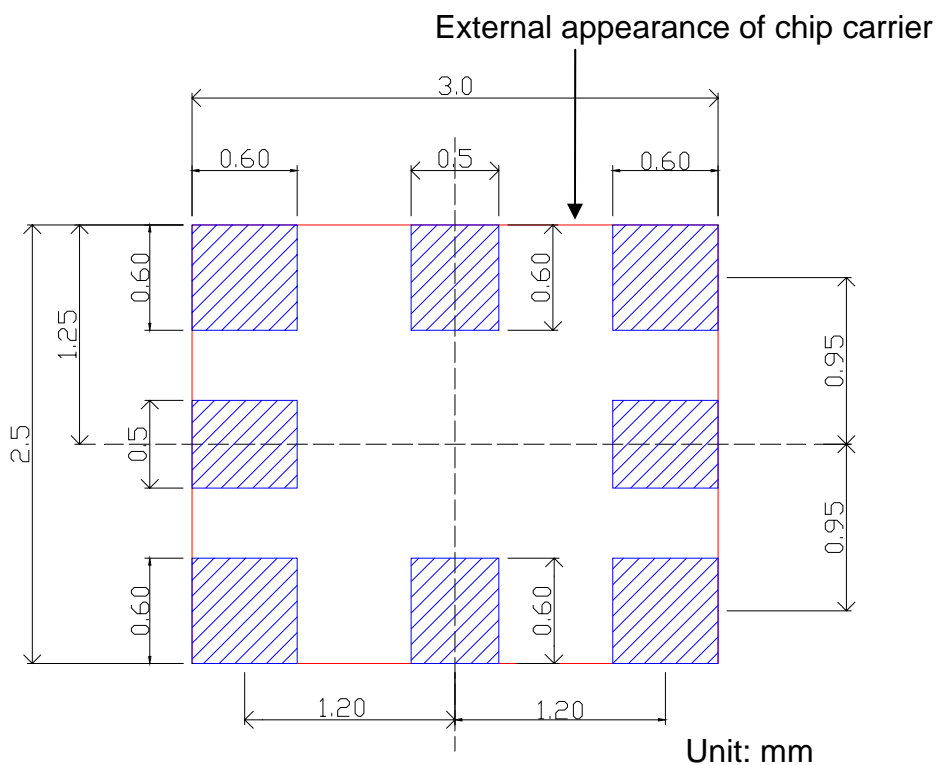


**Figure 2. Recommended foot print pattern**




Pb-free Part  
零件号: FAR-D5GD-942M50-D1DF 供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version	1.0gg

### Tx to Ant

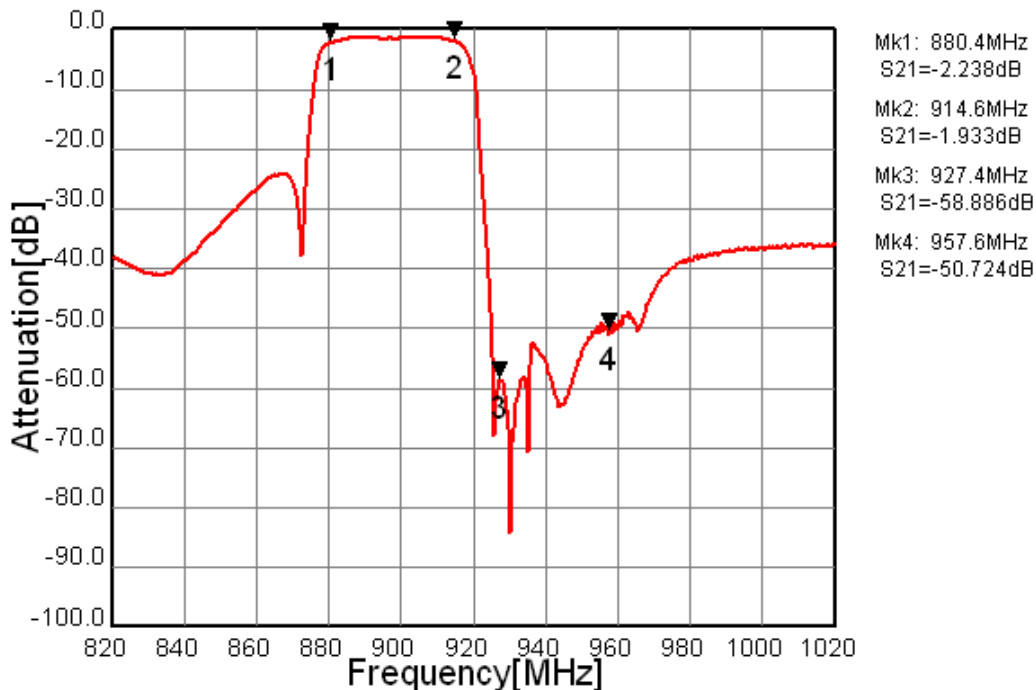

### Ant to Rx

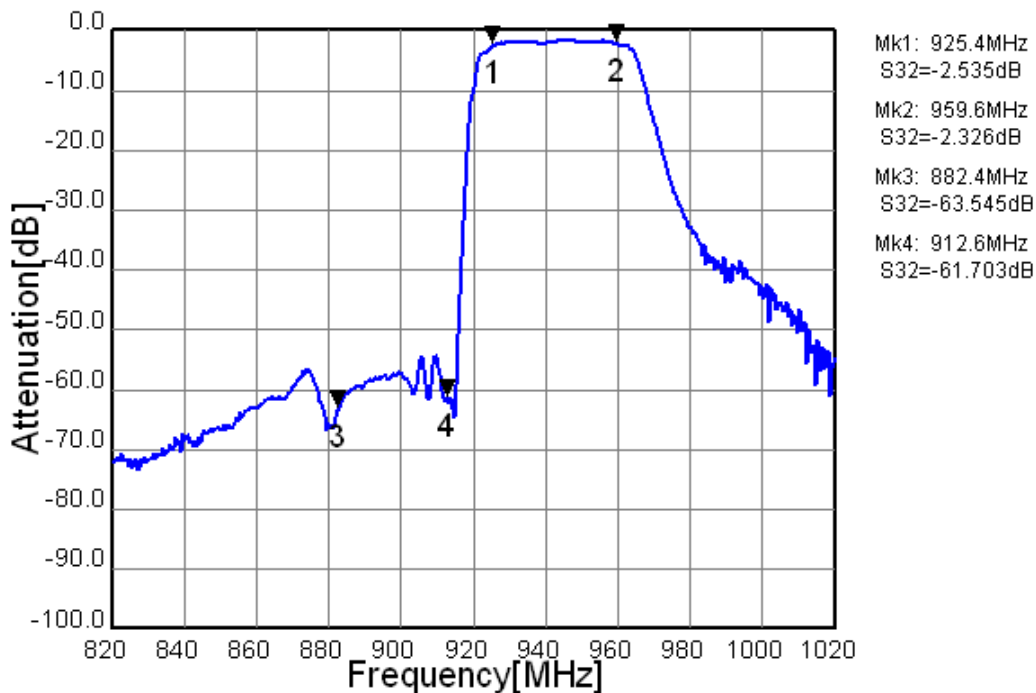

**Figure 3-1. Electrical Characteristics**

These data include loss that comes from the test board. (Approximately 0.05dB)



Pb-free

\*Pb-Free Part


THE POSSIBILITIES ARE INFINITE




查询FAR-D5GD-942M50-D1DF"供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version 1.0gg	

## Tx to Ant, Ant to Rx

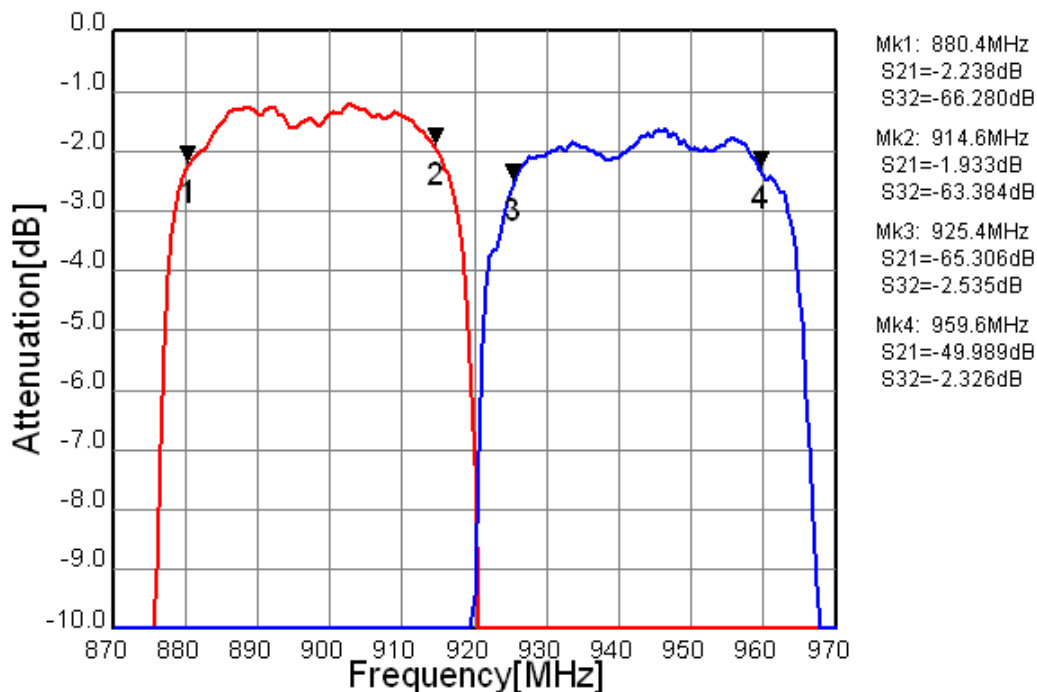

## Tx to Rx Isolation

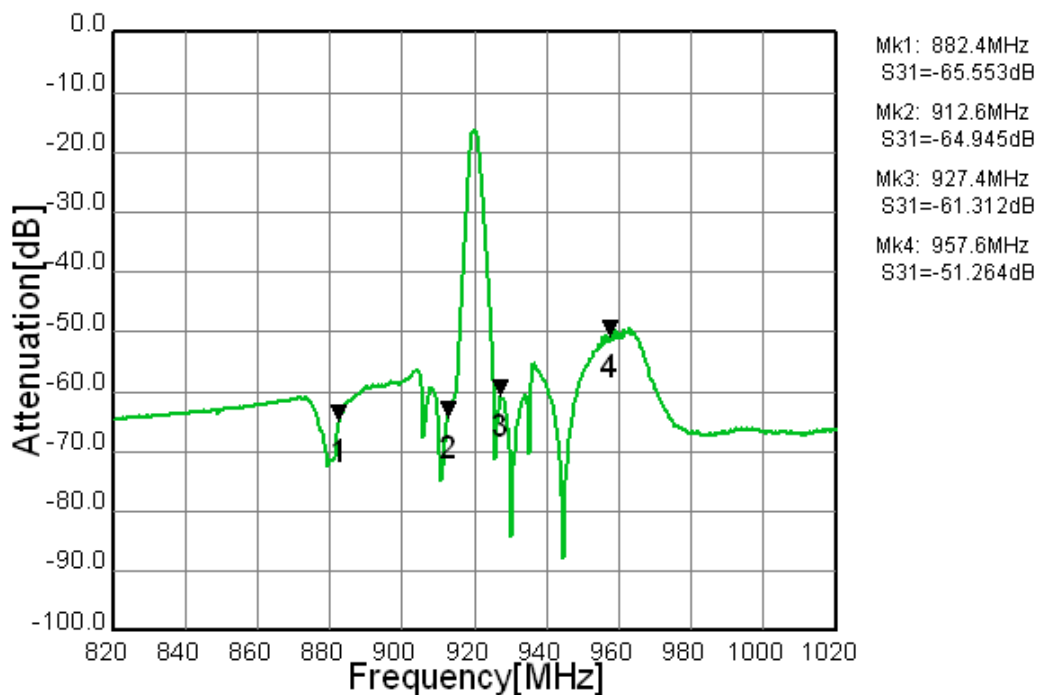

**Figure 3-2. Electrical Characteristics**



These data include loss that comes from the test board. (Approximately 0.05dB)



Pb-free Part  
查询“FAR-D5GD-942M50-D1DF”供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version	1.0gg

## Tx Port

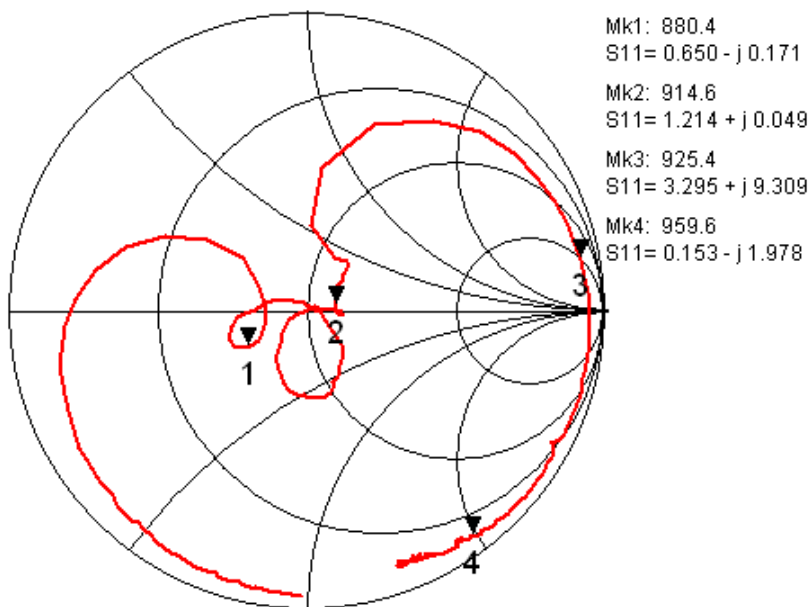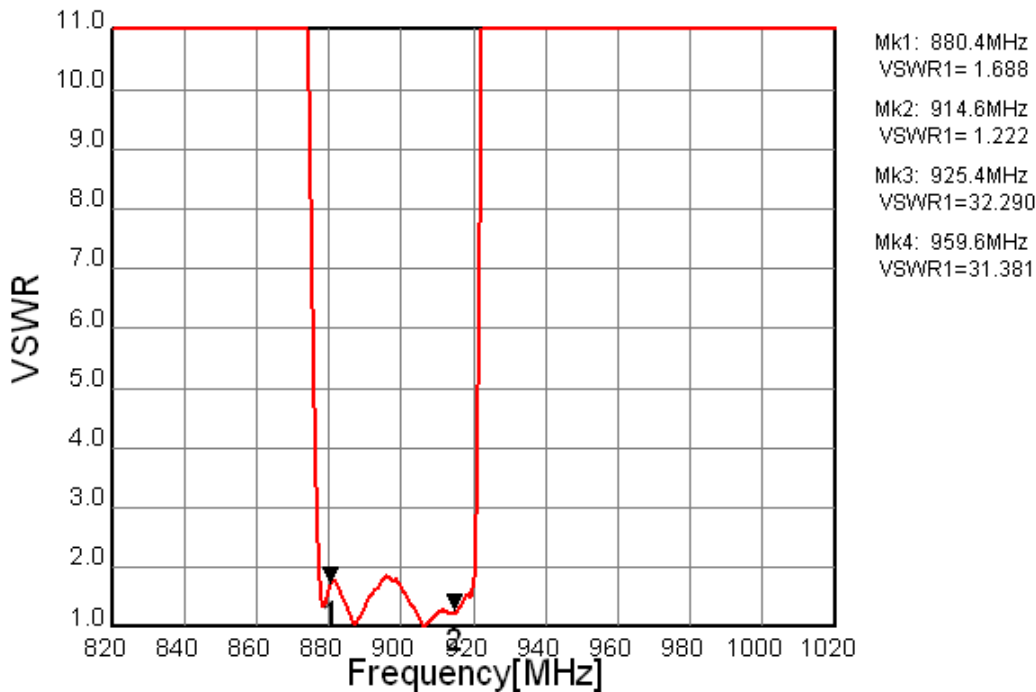



**Figure 3-3. Electrical Characteristics**



Pb-free Part  
查询“FAR-D5GD-942M50-D1DF”供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version	1.0gg

## Rx Port

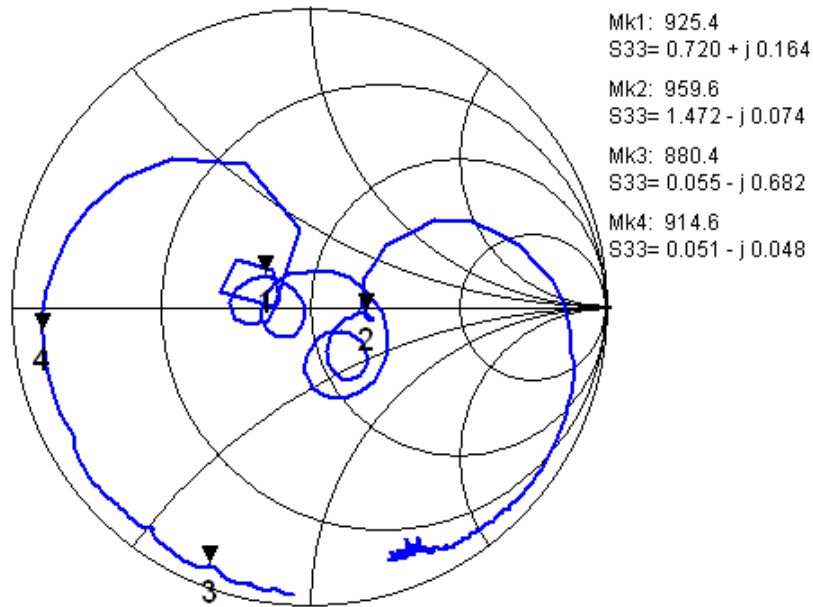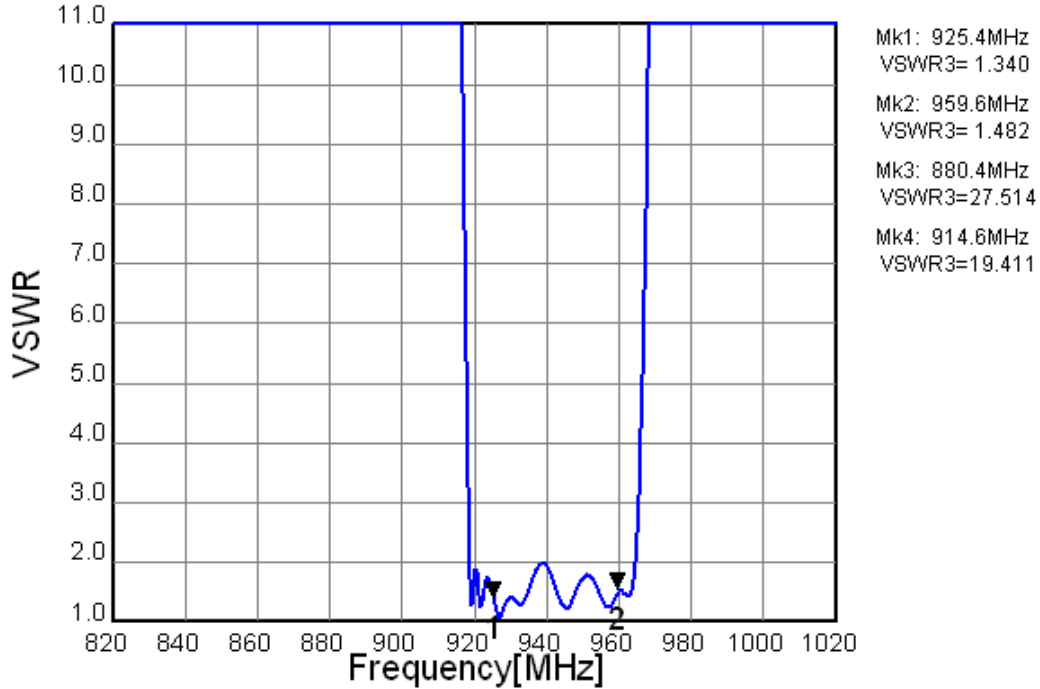



**Figure 3-4. Electrical Characteristics**



Pb-free Part  
查询“FAR-D5GD-942M50-D1DF”供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version	1.0gg

## Ant Port

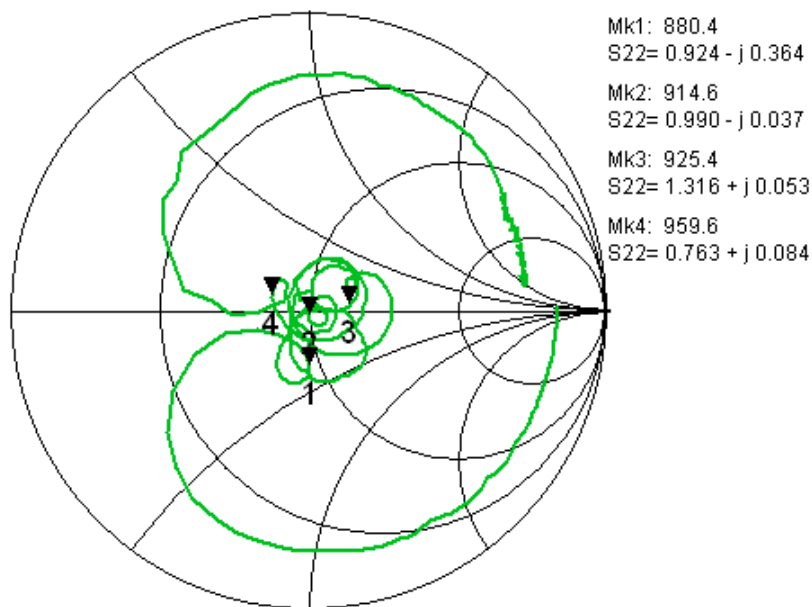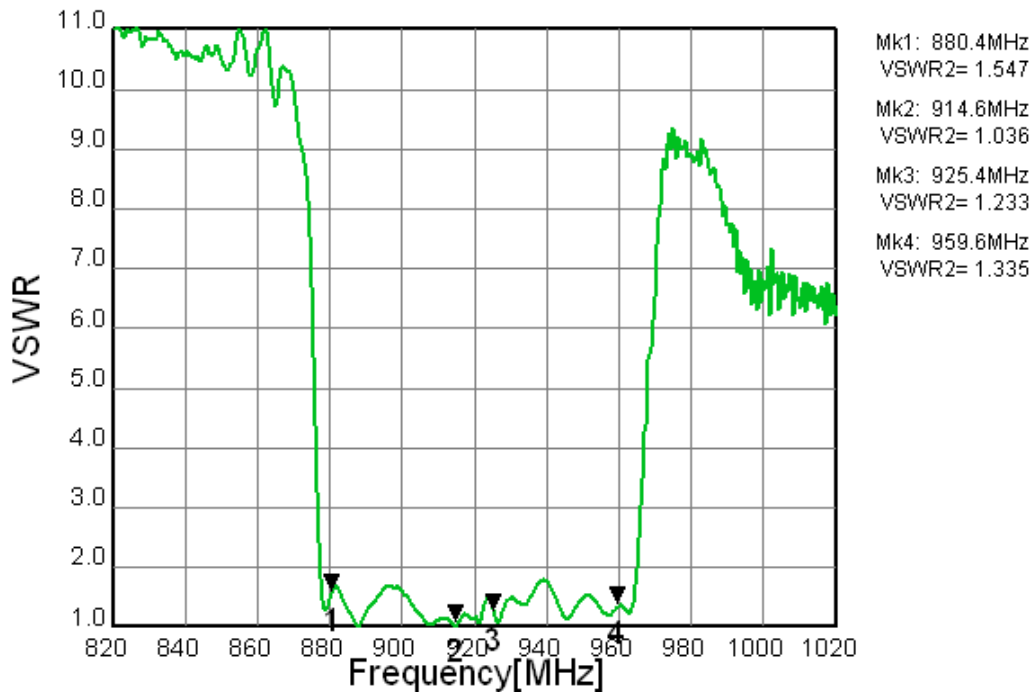

**Figure 3-5. Electrical Characteristics**






Pb-free Part  
零件名: FAR-D5GD-942M50-D1DF 供应商


Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version	1.0gg

### Ant to Rx (Amplitude balance)

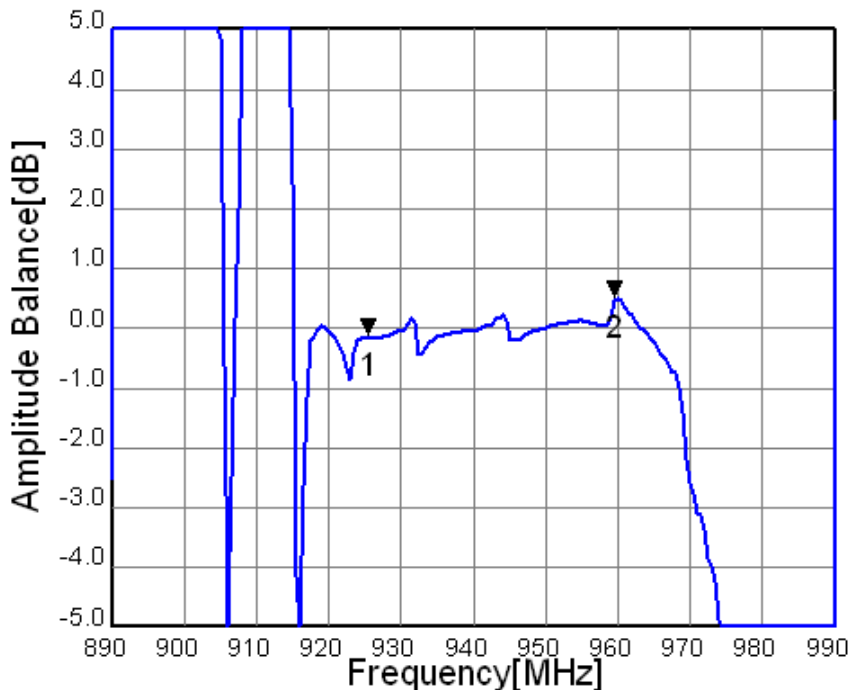

Mk1: 925.4MHz  
A Bal=-0.175dB  
Mk2: 959.6MHz  
A Bal= 0.466dB

### Ant to Rx (Phase balance)

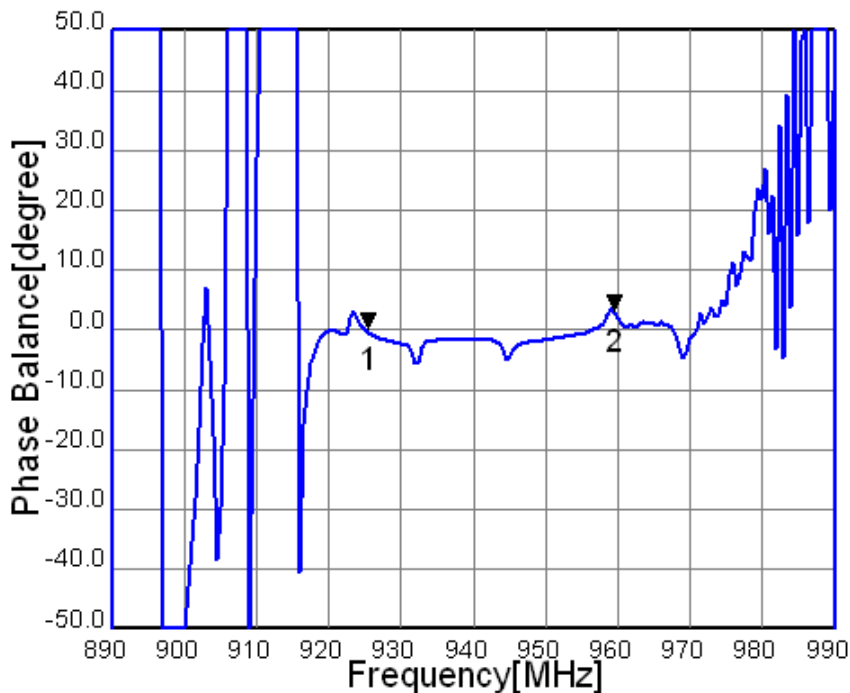

Mk1: 925.4MHz  
P Bal=-0.373deg  
Mk2: 959.6MHz  
P Bal= 2.590deg


Figure 3-6. Electrical Characteristics



Pb-free Part  
查询“FAR-D5GD-942M50-D1DF”供应商

Customer Name	Standard	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA Band VIII Duplexer (Rx balanced)	DATE	July 30, 2008
FMD P/N	FAR-D5GD-942M50-D1DF	Version	1.0gg

### Tx to Ant (Wide span)

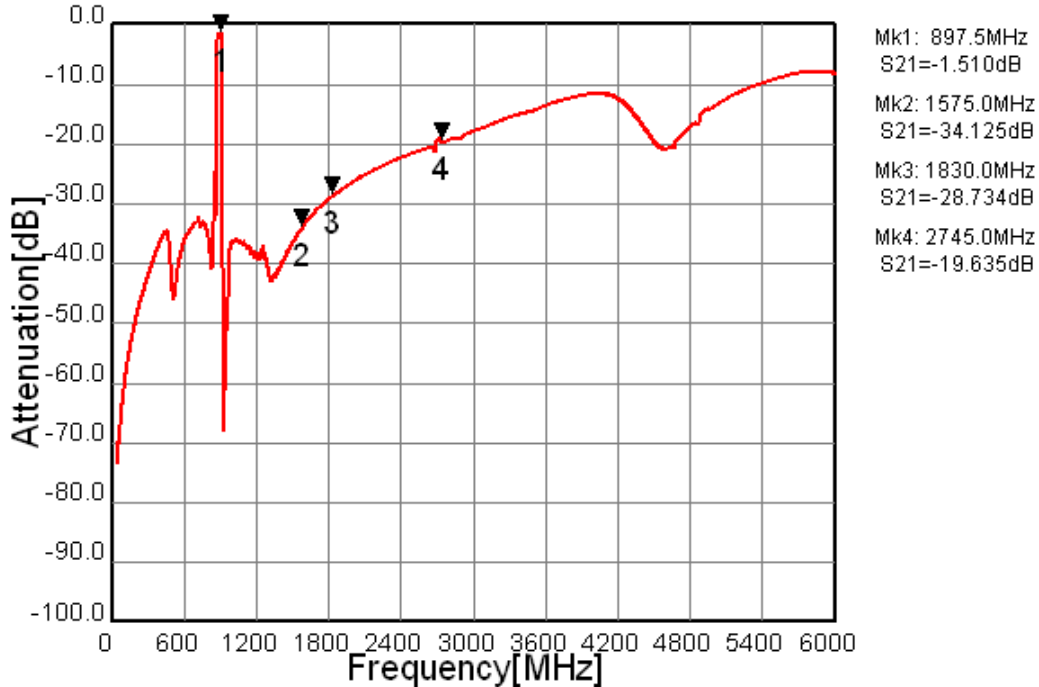

### Ant to Rx (Wide span)

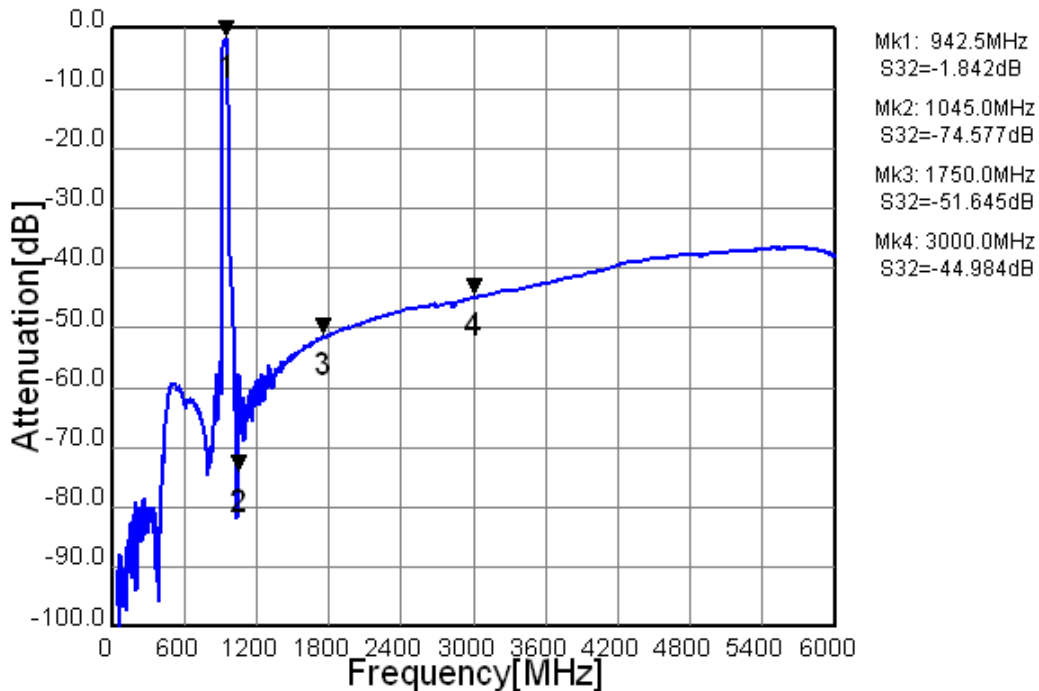


Figure 3-7. Electrical Characteristics

**This datasheet has been downloaded from:**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**Free Download**

**Daily Updated Database**

**100% Free Datasheet Search Site**

**100% Free IC Replacement Search Site**

**Convenient Electronic Dictionary**

**Fast Search System**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**