

MOS FIELD EFFECT TRANSISTOR 2SK3113B

SWITCHING N-CHANNEL POWER MOS FET

DESCRIPTION

The 2SK3113B is N-channel MOS FET device that features a low gate charge and excellent switching characteristics, and designed for high voltage applications such as switching power supply, AC adapter.

FEATURES

• Low on-state resistance

 $R_{DS(on)} = 4.4 \Omega MAX. (V_{GS} = 10 V, I_{D} = 1.0 A)$

Low gate charge

 $Q_G = 7.9 \text{ nC TYP.}$ ($V_{DD} = 450 \text{ V}$, $V_{GS} = 10 \text{ V}$, $I_D = 2.0 \text{ A}$)

Gate voltage rating: ±30 V

Avalanche capability ratings

<R> ORDERING INFORMATION

PART NUMBER	LEAD PLATING	PACKING	PACKAGE	
2SK3113B-S15-AY Note	Pure Sn (Tin)	Tube 70 p/tube	TO-251 (MP-3-a) typ. 0.39 g	
2SK3113B(1)-S27-AY Note		Tube 75 p/tube	TO-251 (MP-3-b) typ. 0.34 g	
2SK3113B-ZK-E1-AY Note		Tape 2500 p/reel	TO 050 (MD 07K) L 0 07 .	
2SK3113B-ZK-E2-AY Note			TO-252 (MP-3ZK) typ. 0.27 g	

Note Pb-free (This product does not contain Pb in external electrode.)

ABSOLUTE MAXIMUM RATINGS (TA = 25°C)

Drain to Source Voltage (Vgs = 0 V) 600 Gate to Source Voltage (VDS = 0 V) Vgss ±30 Drain Current (DC) (Tc = 25°C) ID(DC) ±2.0 Drain Current (pulse) Note1 ID(pulse) ±8.0 Total Power Dissipation (Tc = 25°C) P_{T1} 20 W Total Power Dissipation (T_A = 25°C) Note2 1.0 W PT2 150 °C **Channel Temperature** Tch Storage Temperature -55 to +150 °C Tstg Single Avalanche Current Note3 las 2.0 Α Single Avalanche Energy Note3 Eas 2.7 mJ







Notes 1. PW \leq 10 μ s, Duty Cycle \leq 1%

- 2. Mounted on glass epoxy board of 40 mm × 40 mm × 1.6 mm
- 3. Starting T_{ch} = 25°C, V_{DD} = 150 V, R_G = 25 Ω , V_{GS} = 20 \rightarrow 0 V

The information in this document is subject to change without notice. Before using this document, please

confirm that this is the latest version.

Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.




ELECTRICAL CHARACTERISTICS (TA = 25°C)


CHARACTERISTICS	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Zero Gate Voltage Drain Current	Inss	V _{DS} = 600 V, V _{GS} = 0 V			100	μA
Gate Leakage Current	Igss	V _{GS} = ±30 V, V _{DS} = 0 V			±10	μA
Gate Cut-off Voltage	V _{GS(off)}	V _{DS} = 10 V, I _D = 1 mA	2.5		3.5	V
Forward Transfer Admittance Note	y fs	V _{DS} = 10 V, I _D = 1.0 A	0.5	0.9		S
Drain to Source On-state Resistance Note	R _{DS(on)}	V _{GS} = 10 V, I _D = 1.0 A		3.2	4.4	Ω
Input Capacitance	Ciss	V _{DS} = 10 V		290		pF
Output Capacitance	Coss	V _{GS} = 0 V		75		pF
Reverse Transfer Capacitance	Crss	f = 1 MHz		7		pF
Turn-on Delay Time	t d(on)	V _{DD} = 150 V, I _D = 1.0 A		10.5		ns
Rise Time	t r	V _{GS} = 10 V		4.8		ns
Turn-off Delay Time	td(off)	R _G = 10 Ω		15.8		ns
Fall Time	tf	R _L = 10 Ω		10.5		ns
Total Gate Charge	Q _G	V _{DD} = 450 V		7.9		nC
Gate to Source Charge	Qgs	V _{GS} = 10 V		2.7		nC
Gate to Drain Charge	Q _{GD}	I _D = 2.0 A		3.2		nC
Body Diode Forward Voltage Note	V _{F(S-D)}	I _F = 2.0 A, V _{GS} = 0 V		0.8		V
Reverse Recovery Time	trr	I _F = 2.0 A, V _{GS} = 0 V		190		ns
Reverse Recovery Charge	Qrr	di/dt = 50 A/μs		500		nC

Note Pulsed

TEST CIRCUIT 1 AVALANCHE CAPABILITY




TEST CIRCUIT 2 SWITCHING TIME

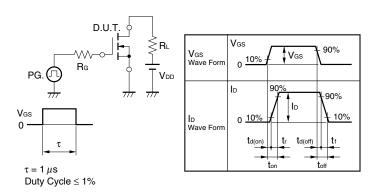


TEST CIRCUIT 3 GATE CHARGE


$$\begin{array}{c|c} D.U.T. & \\ \hline \\ I_G = 2 \text{ mA} \\ \hline \\ PG. & \\ \hline \\ \end{array} \begin{array}{c} R_L \\ \hline \\ \end{array}$$

TYPICAL CHARACTERISTICS (TA = 25°C)







FORWARD BIAS SAFE OPERATING AREA




TRANSIENT THERMAL RESISTANCE vs. PULSE WIDTH

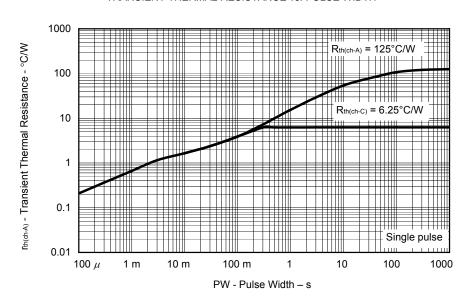


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE




FORWARD TRANSFER CHARACTERISTICS




GATE CUT-OFF VOLTAGE vs. CHANNEL TEMPERATURE




FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT



DRAIN TO SOURCE ON-STATE RESISTANCE vs. GATE TO SOURCE VOLTAGE




DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT




 $\mathsf{R}_{\mathsf{DS}(\varpi)}$ - Drain to Source On-state Resistance - Ω

| yfs | - Forward Transfer Admittance - S






SOURCE TO DRAIN DIODE FORWARD VOLTAGE



V_{F(S-D)} – Source to Drain Voltage - V


CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE




Coss, Crss - Capacitance - pF

trr - Reverse Recovery Time - ns


SWITCHING CHARACTERISTICS





REVWESE RECOVERY TIME vs. DRAIN CURRENT




DYNAMIC INPUT/OUTPUT CHARACTERISTICS









<R> PACKAGE DRAWINGS (Unit: mm)

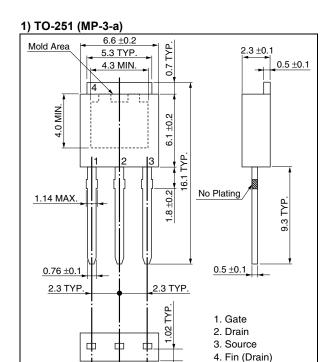


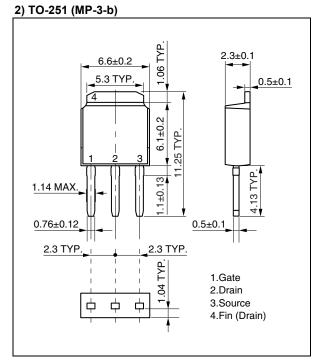

3) TO-252 (MP-3ZK)



EQUIVALENT CIRCUIT



Remark The diode connected between the gate and source of the transistor serves as a protector against ESD. When this device actually used, an additional protection circuit is externally required if a voltage exceeding the rated voltage may be applied to this device.

- The information in this document is current as of June, 2007. The information is subject to change
 without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or
 data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all
 products and/or types are available in every country. Please check with an NEC Electronics sales
 representative for availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without the prior
 written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may
 appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".
 - The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.
 - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.
 - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).
 - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).