



The Am29LV008B is not offered for new designs. Please contact a Spansion representative for alternatives.

The following document contains information on Spansion memory products. Although the document is marked with the name of the company that originally developed the specification, Spansion will continue to offer these products to existing customers.

### **Continuity of Specifications**

There is no change to this data sheet as a result of offering the device as a Spansion product. Any changes that have been made are the result of normal data sheet improvement and are noted in the document revision summary, where supported. Future routine revisions will occur when approved and changes will be noted in a revision summary.

### **Continuity of Ordering Part Numbers**

Spansion continues to support existing part numbers beginning with "Am" and "MBM". To order these products, please use only the Ordering Part Numbers listed in this document.

### **For More Information**

Please contact your local sales office for additional information about Spansion memory solutions.

[查询"AM29LV008BB-70RED"供应商](#)

**THIS PAGE LEFT INTENTIONALLY BLANK.**

# Am29LV008B

8 Megabit (1 M x 8-Bit)

CMOS 3.0 Volt-only Boot Sector Flash Memory

The Am29LV008B is not offered for new designs. Please contact a Spansion representative for alternates.

## DISTINCTIVE CHARACTERISTICS

### ■ Single power supply operation

- Full voltage range: 2.7 to 3.6 volt read and write operations for battery-powered applications
- Regulated voltage range: 3.0 to 3.6 volt read and write operations and for compatibility with high performance 3.3 volt microprocessors

### ■ Manufactured on 0.32 $\mu$ m process technology

- Compatible with 0.5  $\mu$ m Am29LV008 device

### ■ High performance

- Full voltage range: access times as fast as 90 ns
- Regulated voltage range: access times as fast as 70 ns

### ■ Ultra low power consumption (typical values at 5 MHz)

- 200 nA Automatic Sleep mode current
- 200 nA standby mode current
- 7 mA read current
- 15 mA program/erase current

### ■ Flexible sector architecture

- One 16 Kbyte, two 8 Kbyte, one 32 Kbyte, and fifteen 64 Kbyte sectors
- Supports full chip erase
- Sector Protection features:  
A hardware method of locking a sector to prevent any program or erase operations within that sector  
Sectors can be locked in-system or via programming equipment  
Temporary Sector Unprotect feature allows code changes in previously locked sectors

### ■ Unlock Bypass Program Command

- Reduces overall programming time when issuing multiple program command sequences

### ■ Top or bottom boot block configurations available

### ■ Embedded Algorithms

- Embedded Erase algorithm automatically preprograms and erases the entire chip or any combination of designated sectors
- Embedded Program algorithm automatically writes and verifies data at specified addresses

### ■ Minimum 1,000,000 write cycle guarantee per sector

### ■ 20-year data retention at 125°C

- Reliable operation for the life of the system

### ■ Package option

- 40-pin TSOP

### ■ Compatibility with JEDEC standards

- Pinout and software compatible with single-power supply Flash
- Superior inadvertent write protection

### ■ Data# Polling and toggle bits

- Provides a software method of detecting program or erase operation completion

### ■ Ready/Busy# pin (RY/BY#)

- Provides a hardware method of detecting program or erase cycle completion

### ■ Erase Suspend/Erase Resume

- Suspends an erase operation to read data from, or program data to, a sector that is not being erased, then resumes the erase operation

### ■ Hardware reset pin (RESET#)

- Hardware method to reset the device to reading array data

## GENERAL DESCRIPTION

查询"AM29LV008BB-70RED"供应商  
The Am29LV008B is an 8-Mbit, 3.0-volt-only Flash memory organized as 1,048,576 bytes. The device is offered in a 40-pin TSOP package. The byte-wide (x8) data appears on DQ7–DQ0. This device requires only a single, 3.0 volt VCC supply to perform read, program, and erase operations. A standard EPROM programmer can also be used to program and erase the device.

This device is manufactured using AMD's 0.32  $\mu\text{m}$  process technology, and offers all the features and benefits of the Am29LV008, which was manufactured using 0.5  $\mu\text{m}$  process technology. In addition, the Am29LV008B features unlock bypass programming and in-system sector protection/unprotection.

The standard device offers access times of 70, 90, and 120 ns, allowing high speed microprocessors to operate without wait states. To eliminate bus contention the device has separate chip enable (CE#), write enable (WE#) and output enable (OE#) controls.

The device requires only a **single 3.0 volt power supply** for both read and write functions. Internally generated and regulated voltages are provided for the program and erase operations.

The device is entirely command set compatible with the **JEDEC single-power-supply Flash standard**. Commands are written to the command register using standard microprocessor write timings. Register contents serve as input to an internal state-machine that controls the erase and programming circuitry. Write cycles also internally latch addresses and data needed for the programming and erase operations. Reading data out of the device is similar to reading from other Flash or EPROM devices.

Device programming occurs by executing the program command sequence. This initiates the **Embedded Program** algorithm—an internal algorithm that automatically times the program pulse widths and verifies proper cell margin. The **Unlock Bypass** mode facilitates faster programming times by requiring only two write cycles to program data instead of four.

Device erasure occurs by executing the erase command sequence. This initiates the **Embedded Erase** algorithm—an internal algorithm that automatically preprograms the array (if it is not already

programmed) before executing the erase operation. During erase, the device automatically times the erase pulse widths and verifies proper cell margin.

The host system can detect whether a program or erase operation is complete by observing the RY/BY# pin, or by reading the DQ7 (Data# Polling) and DQ6 (toggle) **status bits**. After a program or erase cycle has been completed, the device is ready to read array data or accept another command.

The **sector erase architecture** allows memory sectors to be erased and reprogrammed without affecting the data contents of other sectors. The device is fully erased when shipped from the factory.

**Hardware data protection** measures include a low VCC detector that automatically inhibits write operations during power transitions. The **hardware sector protection** feature disables both program and erase operations in any combination of the sectors of memory. This can be achieved in-system or via programming equipment.

The **Erase Suspend** feature enables the user to put erase on hold for any period of time to read data from, or program data to, any sector that is not selected for erasure. True background erase can thus be achieved.

The **hardware RESET# pin** terminates any operation in progress and resets the internal state machine to reading array data. The RESET# pin may be tied to the system reset circuitry. A system reset would thus also reset the device, enabling the system microprocessor to read the boot-up firmware from the Flash memory.

The device offers two power-saving features. When addresses have been stable for a specified amount of time, the device enters the **automatic sleep mode**. The system can also place the device into the **standby mode**. Power consumption is greatly reduced in both these modes.

AMD's Flash technology combines years of Flash memory manufacturing experience to produce the highest levels of quality, reliability and cost effectiveness. The device electrically erases all bits within a sector simultaneously via Fowler-Nordheim tunneling. The data is programmed using hot electron injection.


## TABLE OF CONTENTS

|                                                                   |           |                                                                   |           |
|-------------------------------------------------------------------|-----------|-------------------------------------------------------------------|-----------|
| <a href="#">查询"AM29LV008BB-70RED"供应商</a>                          | 6         | DQ5: Exceeded Timing Limits .....                                 | 22        |
| <b>Product Selector Guide .....</b>                               | <b>6</b>  | DQ3: Sector Erase Timer .....                                     | 22        |
| <b>Connection Diagrams .....</b>                                  | <b>7</b>  | Table 6. Write Operation Status .....                             | 23        |
| <b>Pin Configuration .....</b>                                    | <b>7</b>  | <b>Absolute Maximum Ratings .....</b>                             | <b>24</b> |
| <b>Logic Symbol .....</b>                                         | <b>7</b>  | Figure 7. Maximum Negative Overshoot Waveform .....               | 24        |
| <b>Ordering Information .....</b>                                 | <b>8</b>  | Figure 8. Maximum Positive Overshoot Waveform.....                | 24        |
| <b>Device Bus Operations .....</b>                                | <b>9</b>  | <b>Operating Ranges .....</b>                                     | <b>24</b> |
| Table 1. Am29LV008B Device Bus Operations .....                   | 9         | <b>DC Characteristics .....</b>                                   | <b>25</b> |
| Requirements for Reading Array Data .....                         | 9         | Figure 9. I <sub>CC1</sub> Current vs. Time (Showing Active and   |           |
| Writing Commands/Command Sequences .....                          | 9         | Automatic Sleep Currents) .....                                   | 26        |
| Program and Erase Operation Status .....                          | 10        | Figure 10. Typical I <sub>CC1</sub> vs. Frequency .....           | 26        |
| Standby Mode .....                                                | 10        | <b>Test Conditions .....</b>                                      | <b>27</b> |
| Automatic Sleep Mode .....                                        | 10        | Figure 11. Test Setup.....                                        | 27        |
| RESET#: Hardware Reset Pin .....                                  | 10        | Table 7. Test Specifications .....                                | 27        |
| Output Disable Mode .....                                         | 10        | Figure 12. Input Waveforms and Measurement Levels .....           | 27        |
| Table 2. Am29LV008BT Top Boot Sector Address Table .....          | 11        | <b>AC Characteristics .....</b>                                   | <b>28</b> |
| Table 3. Am29LV008BB Bottom Boot Sector Address Table .....       | 11        | Read Operations .....                                             | 28        |
| Autoselect Mode .....                                             | 12        | Figure 13. Read Operations Timings .....                          | 28        |
| Table 4. Am29LV008B Autoselect Codes (High Voltage Method) ..     | 12        | Hardware Reset (RESET#) .....                                     | 29        |
| Sector Protection/Unprotection .....                              | 12        | Figure 14. RESET# Timings .....                                   | 29        |
| Figure 1. In-System Sector Protect/Sector Unprotect Algorithms... | 13        | Erase/Program Operations .....                                    | 30        |
| Temporary Sector Unprotect .....                                  | 14        | Figure 15. Program Operation Timings.....                         | 31        |
| Figure 2. Temporary Sector Unprotect Operation.....               | 14        | Figure 16. Chip/Sector Erase Operation Timings .....              | 32        |
| Hardware Data Protection .....                                    | 14        | Figure 17. Data# Polling Timings (During Embedded Algorithms).    | 33        |
| Low V <sub>CC</sub> Write Inhibit .....                           | 14        | Figure 18. Toggle Bit Timings (During Embedded Algorithms).....   | 33        |
| Write Pulse "Glitch" Protection .....                             | 14        | Figure 19. DQ2 vs. DQ6.....                                       | 34        |
| Logical Inhibit .....                                             | 14        | Temporary Sector Unprotect .....                                  | 34        |
| Power-Up Write Inhibit .....                                      | 14        | Figure 20. Temporary Sector Unprotect Timing Diagram .....        | 34        |
| <b>Command Definitions .....</b>                                  | <b>15</b> | Figure 21. Sector Protect/Unprotect Timing Diagram .....          | 35        |
| Reading Array Data .....                                          | 15        | Alternate CE# Controlled Erase/Program Operations .....           | 36        |
| Reset Command .....                                               | 15        | Figure 22. Alternate CE# Controlled Write Operation Timings ..... | 37        |
| Autoselect Command Sequence .....                                 | 15        | <b>Erase and Programming Performance .....</b>                    | <b>38</b> |
| Byte Program Command Sequence .....                               | 15        | <b>Latchup Characteristics .....</b>                              | <b>38</b> |
| Unlock Bypass Command Sequence .....                              | 16        | <b>TSOP Pin Capacitance .....</b>                                 | <b>38</b> |
| Figure 3. Program Operation .....                                 | 16        | <b>Data Retention .....</b>                                       | <b>38</b> |
| Chip Erase Command Sequence .....                                 | 16        | <b>Physical Dimensions .....</b>                                  | <b>39</b> |
| Sector Erase Command Sequence .....                               | 17        | TS 040—40-Pin Standard TSOP .....                                 | 39        |
| Erase Suspend/Erase Resume Commands .....                         | 17        | <b>Revision Summary .....</b>                                     | <b>40</b> |
| Figure 4. Erase Operation.....                                    | 18        | Revision A (October 1997) .....                                   | 40        |
| Command Definitions .....                                         | 19        | Revision B (January 1998) .....                                   | 40        |
| Table 5. Am29LV008B Command Definitions .....                     | 19        | Revision B+1 (March 1998) .....                                   | 40        |
| <b>Write Operation Status .....</b>                               | <b>20</b> | Revision C (January 1999) .....                                   | 40        |
| DQ7: Data# Polling .....                                          | 20        | Revision D (November 19, 1999) .....                              | 40        |
| Figure 5. Data# Polling Algorithm .....                           | 20        | Revision D+1 (August 14, 2000) .....                              | 40        |
| RY/BY#: Ready/Busy# .....                                         | 21        | Revision D+2 (November 10, 2000) .....                            | 40        |
| DQ6: Toggle Bit I .....                                           | 21        | Revision D+3 (June 11, 2004) .....                                | 40        |
| DQ2: Toggle Bit II .....                                          | 21        | Revision D4 (February 21, 2006) .....                             | 40        |
| Reading Toggle Bits DQ6/DQ2 .....                                 | 21        | Revision D5 (September 12, 2006) .....                            | 40        |
| Figure 6. Toggle Bit Algorithm.....                               | 22        |                                                                   |           |

**PRODUCT SELECTOR GUIDE**


| Family Part Number                   |                                               | Am29LV008B |     |      |
|--------------------------------------|-----------------------------------------------|------------|-----|------|
| Speed Options                        | Regulated Voltage Range: $V_{CC} = 3.0-3.6$ V | -70R       |     |      |
|                                      | Full Voltage Range: $V_{CC} = 2.7-3.6$ V      |            | -90 | -120 |
| Max access time, ns ( $t_{ACC}$ )    |                                               | 70         | 90  | 120  |
| Max CE# access time, ns ( $t_{CE}$ ) |                                               | 70         | 90  | 120  |
| Max OE# access time, ns ( $t_{OE}$ ) |                                               | 30         | 35  | 50   |

**Note:** See "AC Characteristics" for full specifications.

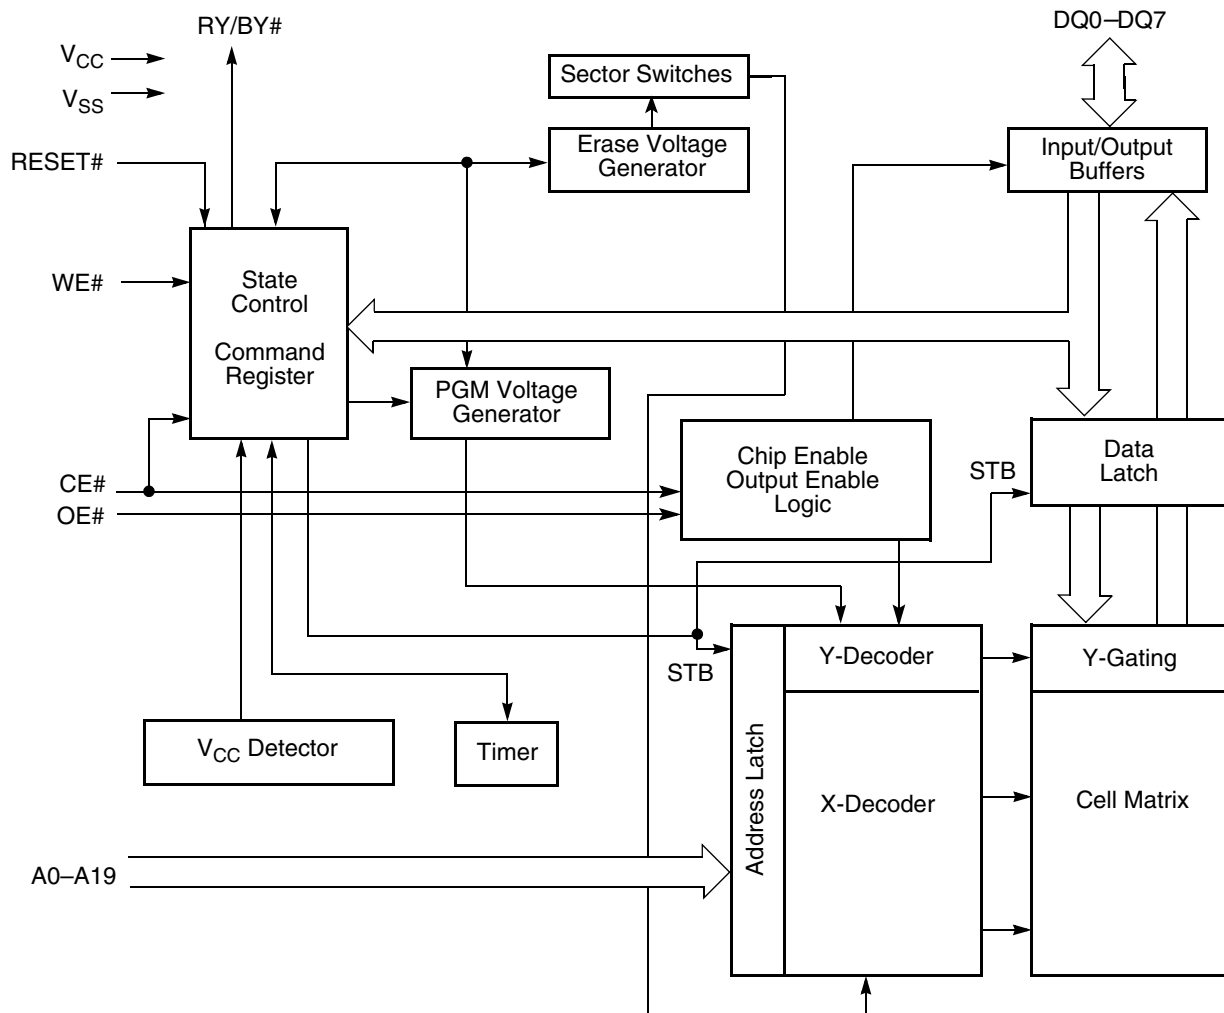**BLOCK DIAGRAM**


## CONNECTION DIAGRAMS


[查询"AM29LV008BB-70RED"供应商](#)

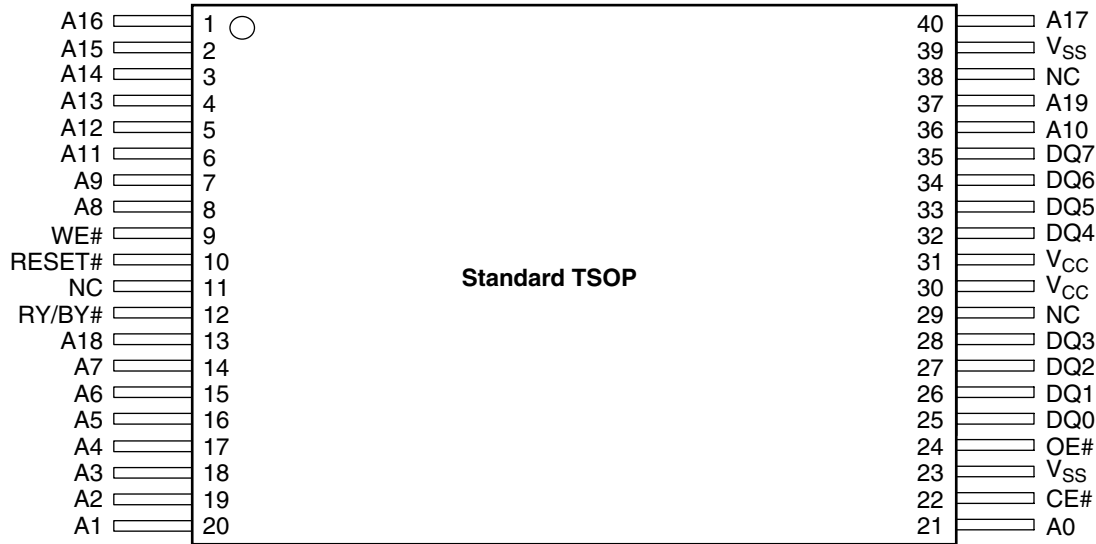

## PIN CONFIGURATION

|                 |   |                                                                                                                      |
|-----------------|---|----------------------------------------------------------------------------------------------------------------------|
| A0–A19          | = | 20 addresses                                                                                                         |
| DQ0–DQ7         | = | 8 data inputs/outputs                                                                                                |
| CE#             | = | Chip enable                                                                                                          |
| OE#             | = | Output enable                                                                                                        |
| WE#             | = | Write enable                                                                                                         |
| RESET#          | = | Hardware reset pin, active low                                                                                       |
| RY/BY#          | = | Ready/Busy# output                                                                                                   |
| V <sub>CC</sub> | = | 3.0 volt-only single power supply<br>(see Product Selector Guide for speed<br>options and voltage supply tolerances) |
| V <sub>SS</sub> | = | Device ground                                                                                                        |
| NC              | = | Pin not connected internally                                                                                         |


## LOGIC SYMBOL

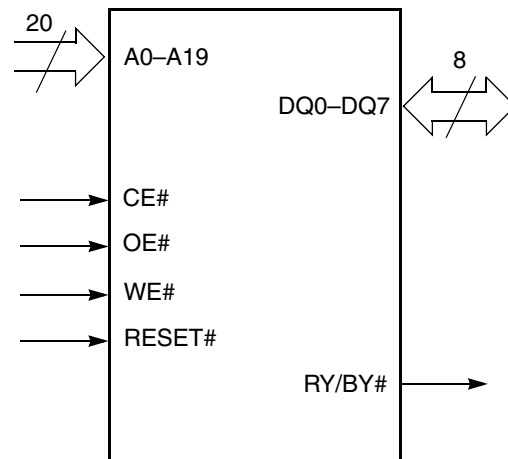

ORDERING INFORMATION

[查询"AM29LV008BB-70RED"供应商](#)  
Standard Products

AMD standard products are available in several packages and operating ranges. The order number (Valid Combination) is formed by a combination of the elements below.

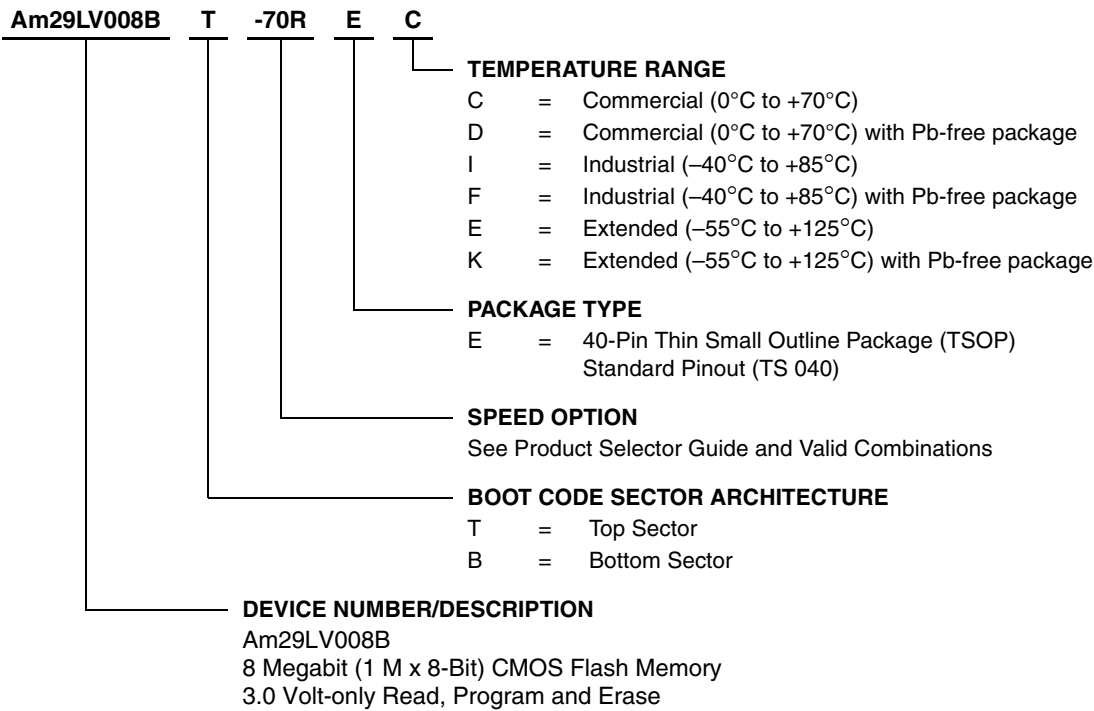

Valid Combinations

Valid Combinations list configurations planned to be supported in volume for this device. Consult the local AMD sales office to confirm availability of specific valid combinations and to check on newly released combinations.

| Valid Combinations                  |                        |
|-------------------------------------|------------------------|
| AM29LV008BT-70R,<br>AM29LV008BB-70R | EC, EI, ED, EF         |
| AM29LV008BT-90,<br>AM29LV008BB-90   | EC, EI, EE, ED, EF, EK |
| AM29LV008BT-120,<br>AM29LV008BB-120 |                        |



## DEVICE BUS OPERATIONS

This section describes the requirements and use of the device bus operations, which are initiated through the internal command register. The command register itself does not occupy any addressable memory location. The register is composed of latches that store the commands, along with the address and data information needed to execute the command. The contents of

the register serve as inputs to the internal state machine. The state machine outputs dictate the function of the device. Table 1 lists the device bus operations, the inputs and control levels they require, and the resulting output. The following subsections describe each of these operations in further detail.

**Table 1. Am29LV008B Device Bus Operations**

| Operation                  | CE#                     | OE# | WE# | RESET#                  | Addresses (Note 1)                     | DQ0–DQ7                            |
|----------------------------|-------------------------|-----|-----|-------------------------|----------------------------------------|------------------------------------|
| Read                       | L                       | L   | H   | H                       | A <sub>IN</sub>                        | D <sub>OUT</sub>                   |
| Write                      | L                       | H   | L   | H                       | A <sub>IN</sub>                        | D <sub>IN</sub>                    |
| Standby                    | V <sub>CC</sub> ± 0.3 V | X   | X   | V <sub>CC</sub> ± 0.3 V | X                                      | High-Z                             |
| Output Disable             | L                       | H   | H   | H                       | X                                      | High-Z                             |
| Reset                      | X                       | X   | X   | L                       | X                                      | High-Z                             |
| Sector Protect (Note 2)    | L                       | H   | L   | V <sub>ID</sub>         | Sector Address, A6 = L, A1 = H, A0 = L | D <sub>IN</sub> , D <sub>OUT</sub> |
| Sector Unprotect (Note 2)  | L                       | H   | L   | V <sub>ID</sub>         | Sector Address, A6 = H, A1 = H, A0 = L | D <sub>IN</sub> , D <sub>OUT</sub> |
| Temporary Sector Unprotect | X                       | X   | X   | V <sub>ID</sub>         | A <sub>IN</sub>                        | D <sub>IN</sub>                    |

### Legend:

L = Logic Low = V<sub>IL</sub>, H = Logic High = V<sub>IH</sub>, V<sub>ID</sub> = 12.0 ± 0.5 V, X = Don't Care, A<sub>IN</sub> = Address In, D<sub>IN</sub> = Data In, D<sub>OUT</sub> = Data Out

### Notes:

- Addresses are A19–A0.
- The sector protect and sector unprotect functions may also be implemented via programming equipment. See the “Sector Protection/Unprotection” section.

## Requirements for Reading Array Data

To read array data from the outputs, the system must drive the CE# and OE# pins to V<sub>IL</sub>. CE# is the power control and selects the device. OE# is the output control and gates array data to the output pins. WE# should remain at V<sub>IH</sub>.

The internal state machine is set for reading array data upon device power-up, or after a hardware reset. This ensures that no spurious alteration of the memory content occurs during the power transition. No command is necessary in this mode to obtain array data. Standard microprocessor read cycles that assert valid addresses on the device address inputs produce valid data on the device data outputs. The device remains enabled for read access until the command register contents are altered.

See “Reading Array Data” for more information. Refer to the AC Read Operations table for timing specifications and to Figure 13 for the timing waveforms. I<sub>CC1</sub> in the DC Characteristics table represents the active current specification for reading array data.

## Writing Commands/Command Sequences

To write a command or command sequence (which includes programming data to the device and erasing sectors of memory), the system must drive WE# and CE# to V<sub>IL</sub>, and OE# to V<sub>IH</sub>.

An erase operation can erase one sector, multiple sectors, or the entire device. Tables 2 and 3 indicate the address space that each sector occupies. A “sector address” consists of the address bits required to uniquely select a sector. The “Command Definitions” section has details on erasing a sector or the entire chip, or suspending/resuming the erase operation.

After the system writes the autoselect command sequence, the device enters the autoselect mode. The system can then read autoselect codes from the internal register (which is separate from the memory array) on DQ7–DQ0. Standard read cycle timings apply in this mode. Refer to the Autoselect Mode and Autoselect Command Sequence sections for more information.

I<sub>CC2</sub> in the DC Characteristics table represents the active current specification for the write mode. The “AC

Characteristics” section contains timing specification tables and timing diagrams for write operations.

## Program and Erase Operation Status

During an erase or program operation, the system may check the status of the operation by reading the status bits on DQ7–DQ0. Standard read cycle timings and  $I_{CC}$  read specifications apply. Refer to “Write Operation Status” for more information, and to “AC Characteristics” for timing diagrams.

## Standby Mode

When the system is not reading or writing to the device, it can place the device in the standby mode. In this mode, current consumption is greatly reduced, and the outputs are placed in the high impedance state, independent of the OE# input.

The device enters the CMOS standby mode when the CE# and RESET# pins are both held at  $V_{CC} \pm 0.3$  V. (Note that this is a more restricted voltage range than  $V_{IH}$ .) If CE# and RESET# are held at  $V_{IH}$ , but not within  $V_{CC} \pm 0.3$  V, the device will be in the standby mode, but the standby current will be greater. The device requires standard access time ( $t_{CE}$ ) for read access when the device is in either of these standby modes, before it is ready to read data.

If the device is deselected during erasure or programming, the device draws active current until the operation is completed.

In the DC Characteristics table,  $I_{CC3}$  and  $I_{CC4}$  represents the standby current specification.

## Automatic Sleep Mode

The automatic sleep mode minimizes Flash device energy consumption. The device automatically enables this mode when addresses remain stable for  $t_{ACC} + 30$  ns. The automatic sleep mode is independent of the CE#, WE#, and OE# control signals. Standard address access timings provide new data when addresses are changed. While in sleep mode, output data is latched and always available to the system.  $I_{CC5}$  in the DC

Characteristics table represents the automatic sleep mode current specification.

## RESET#: Hardware Reset Pin

The RESET# pin provides a hardware method of resetting the device to reading array data. When the RESET# pin is driven low for at least a period of  $t_{RP}$  the device **immediately terminates** any operation in progress, tristates all output pins, and ignores all read/write commands for the duration of the RESET# pulse. The device also resets the internal state machine to reading array data. The operation that was interrupted should be reinitiated once the device is ready to accept another command sequence, to ensure data integrity.

Current is reduced for the duration of the RESET# pulse. When RESET# is held at  $V_{SS} \pm 0.3$  V, the device draws CMOS standby current ( $I_{CC4}$ ). If RESET# is held at  $V_{IL}$  but not within  $V_{SS} \pm 0.3$  V, the standby current will be greater.

The RESET# pin may be tied to the system reset circuitry. A system reset would thus also reset the Flash memory, enabling the system to read the boot-up firmware from the Flash memory.

If RESET# is asserted during a program or erase operation, the RY/BY# pin remains a “0” (busy) until the internal reset operation is complete, which requires a time of  $t_{READY}$  (during Embedded Algorithms). The system can thus monitor RY/BY# to determine whether the reset operation is complete. If RESET# is asserted when a program or erase operation is not executing (RY/BY# pin is “1”), the reset operation is completed within a time of  $t_{READY}$  (not during Embedded Algorithms). The system can read data  $t_{RH}$  after the RESET# pin returns to  $V_{IH}$ .

Refer to the AC Characteristics tables for RESET# parameters and to Figure 14 for the timing diagram.

## Output Disable Mode

When the OE# input is at  $V_{IH}$ , output from the device is disabled. The output pins are placed in the high impedance state.

Table 2. Am29LV008BT Top Boot Sector Address Table

查询"AM29LV008BB-70RED"供应商

| Sector | A19 | A18 | A17 | A16 | A15 | A14 | A13 | Sector Size (Kbytes) | Address Range (in hexadecimal) |
|--------|-----|-----|-----|-----|-----|-----|-----|----------------------|--------------------------------|
| SA0    | 0   | 0   | 0   | 0   | X   | X   | X   | 64                   | 00000h–0FFFFh                  |
| SA1    | 0   | 0   | 0   | 1   | X   | X   | X   | 64                   | 10000h–1FFFFh                  |
| SA2    | 0   | 0   | 1   | 0   | X   | X   | X   | 64                   | 20000h–2FFFFh                  |
| SA3    | 0   | 0   | 1   | 1   | X   | X   | X   | 64                   | 30000h–3FFFFh                  |
| SA4    | 0   | 1   | 0   | 0   | X   | X   | X   | 64                   | 40000h–4FFFFh                  |
| SA5    | 0   | 1   | 0   | 1   | X   | X   | X   | 64                   | 50000h–5FFFFh                  |
| SA6    | 0   | 1   | 1   | 0   | X   | X   | X   | 64                   | 60000h–6FFFFh                  |
| SA7    | 0   | 1   | 1   | 1   | X   | X   | X   | 64                   | 70000h–7FFFFh                  |
| SA8    | 1   | 0   | 0   | 0   | X   | X   | X   | 64                   | 80000h–8FFFFh                  |
| SA9    | 1   | 0   | 0   | 1   | X   | X   | X   | 64                   | 90000h–9FFFFh                  |
| SA10   | 1   | 0   | 1   | 0   | X   | X   | X   | 64                   | A0000h–AFFFFh                  |
| SA11   | 1   | 0   | 1   | 1   | X   | X   | X   | 64                   | B0000h–BFFFFh                  |
| SA12   | 1   | 1   | 0   | 0   | X   | X   | X   | 64                   | C0000h–CFFFFh                  |
| SA13   | 1   | 1   | 0   | 1   | X   | X   | X   | 64                   | D0000h–DFFFFh                  |
| SA14   | 1   | 1   | 1   | 0   | X   | X   | X   | 64                   | E0000h–EFFFFh                  |
| SA15   | 1   | 1   | 1   | 1   | 0   | X   | X   | 32                   | F0000h–F7FFFh                  |
| SA16   | 1   | 1   | 1   | 1   | 1   | 0   | 0   | 8                    | F8000h–F9FFFh                  |
| SA17   | 1   | 1   | 1   | 1   | 1   | 0   | 1   | 8                    | FA000h–FBFFFh                  |
| SA18   | 1   | 1   | 1   | 1   | 1   | 1   | X   | 16                   | FC000h–FFFFFh                  |

Table 3. Am29LV008BB Bottom Boot Sector Address Table

| Sector | A19 | A18 | A17 | A16 | A15 | A14 | A13 | Sector Size (Kbytes) | Address Range (in hexadecimal) |
|--------|-----|-----|-----|-----|-----|-----|-----|----------------------|--------------------------------|
| SA0    | 0   | 0   | 0   | 0   | 0   | 0   | X   | 16                   | 00000h–03FFFh                  |
| SA1    | 0   | 0   | 0   | 0   | 0   | 1   | 0   | 8                    | 04000h–05FFFh                  |
| SA2    | 0   | 0   | 0   | 0   | 0   | 1   | 1   | 8                    | 06000h–07FFFh                  |
| SA3    | 0   | 0   | 0   | 0   | 1   | X   | X   | 32                   | 08000h–0FFFFh                  |
| SA4    | 0   | 0   | 0   | 1   | X   | X   | X   | 64                   | 10000h–1FFFFh                  |
| SA5    | 0   | 0   | 1   | 0   | X   | X   | X   | 64                   | 20000h–2FFFFh                  |
| SA6    | 0   | 0   | 1   | 1   | X   | X   | X   | 64                   | 30000h–3FFFFh                  |
| SA7    | 0   | 1   | 0   | 0   | X   | X   | X   | 64                   | 40000h–4FFFFh                  |
| SA8    | 0   | 1   | 0   | 1   | X   | X   | X   | 64                   | 50000h–5FFFFh                  |
| SA9    | 0   | 1   | 1   | 0   | X   | X   | X   | 64                   | 60000h–6FFFFh                  |
| SA10   | 0   | 1   | 1   | 1   | X   | X   | X   | 64                   | 70000h–7FFFFh                  |
| SA11   | 1   | 0   | 0   | 0   | X   | X   | X   | 64                   | 80000h–8FFFFh                  |
| SA12   | 1   | 0   | 0   | 1   | X   | X   | X   | 64                   | 90000h–9FFFFh                  |
| SA13   | 1   | 0   | 1   | 0   | X   | X   | X   | 64                   | A0000h–AFFFFh                  |
| SA14   | 1   | 0   | 1   | 1   | X   | X   | X   | 64                   | B0000h–BFFFFh                  |
| SA15   | 1   | 1   | 0   | 0   | X   | X   | X   | 64                   | C0000h–CFFFFh                  |
| SA16   | 1   | 1   | 0   | 1   | X   | X   | X   | 64                   | D0000h–DFFFFh                  |
| SA17   | 1   | 1   | 1   | 0   | X   | X   | X   | 64                   | E0000h–EFFFFh                  |
| SA18   | 1   | 1   | 1   | 1   | X   | X   | X   | 64                   | F0000h–FFFFFh                  |

## Autoselect Mode

The autoselect mode provides manufacturer and device identification, and sector protection verification, through identifier codes output on DQ7–DQ0. This mode is primarily intended for programming equipment to automatically match a device to be programmed with its corresponding programming algorithm. However, the autoselect codes can also be accessed in-system through the command register.

When using programming equipment, the autoselect mode requires  $V_{ID}$  (11.5 V to 12.5 V) on address pin A9. Address pins A6, A1, and A0 must be as shown in

Table 4. In addition, when verifying sector protection, the sector address must appear on the appropriate highest order address bits (see Tables 2 and 3). Table 4 shows the remaining address bits that are don't care. When all necessary bits have been set as required, the programming equipment may then read the corresponding identifier code on DQ7–DQ0.

To access the autoselect codes in-system, the host system can issue the autoselect command via the command register, as shown in Table 5. This method does not require  $V_{ID}$ . See “Command Definitions” for details on using the autoselect mode.

**Table 4. Am29LV008B Autoselect Codes (High Voltage Method)**

| Description                                   | CE# | OE# | WE# | A19<br>to<br>A13 | A12<br>to<br>A10 | A9       | A8<br>to<br>A7 | A6 | A5<br>to<br>A2 | A1 | A0 | DQ7<br>to<br>DQ0     |
|-----------------------------------------------|-----|-----|-----|------------------|------------------|----------|----------------|----|----------------|----|----|----------------------|
| Manufacturer ID: AMD                          | L   | L   | H   | X                | X                | $V_{ID}$ | X              | L  | X              | L  | L  | 01h                  |
| Device ID: Am29LV008BT<br>(Top Boot Block)    | L   | L   | H   | X                | X                | $V_{ID}$ | X              | L  | X              | L  | H  | 3Eh                  |
| Device ID: Am29LV008BB<br>(Bottom Boot Block) | L   | L   | H   | X                | X                | $V_{ID}$ | X              | L  | X              | L  | H  | 37h                  |
| Sector Protection Verification                | L   | L   | H   | SA               | X                | $V_{ID}$ | X              | L  | X              | H  | L  | 01h<br>(protected)   |
|                                               |     |     |     |                  |                  |          |                |    |                |    |    | 00h<br>(unprotected) |

$L$  = Logic Low =  $V_{IL}$ ,  $H$  = Logic High =  $V_{IH}$ ,  $SA$  = Sector Address,  $X$  = Don't care.

## Sector Protection/Unprotection

The hardware sector protection feature disables both program and erase operations in any sector. The hardware sector unprotection feature re-enables both program and erase operations in previously protected sectors.

The device is shipped with all sectors unprotected. AMD offers the option of programming and protecting sectors at its factory prior to shipping the device through AMD's ExpressFlash™ Service. Contact an AMD representative for details.

It is possible to determine whether a sector is protected or unprotected. See “Autoselect Mode” for details.

Sector protection/unprotection can be implemented via two methods.

The primary method requires  $V_{ID}$  on the RESET# pin only, and can be implemented either in-system or via programming equipment. Figure 2 shows the algorithms and Figure 21 shows the waveform. This method uses standard microprocessor bus cycle timing. For sector unprotect, all unprotected sectors must first be protected prior to the first sector unprotect write cycle.

The alternate method intended only for programming equipment requires  $V_{ID}$  on address pin A9 and OE#. This method is compatible with programmer routines written for earlier 3.0 volt-only AMD flash devices. Details on this method are provided in a supplement, publication number 20875. Contact an AMD representative to request a copy.


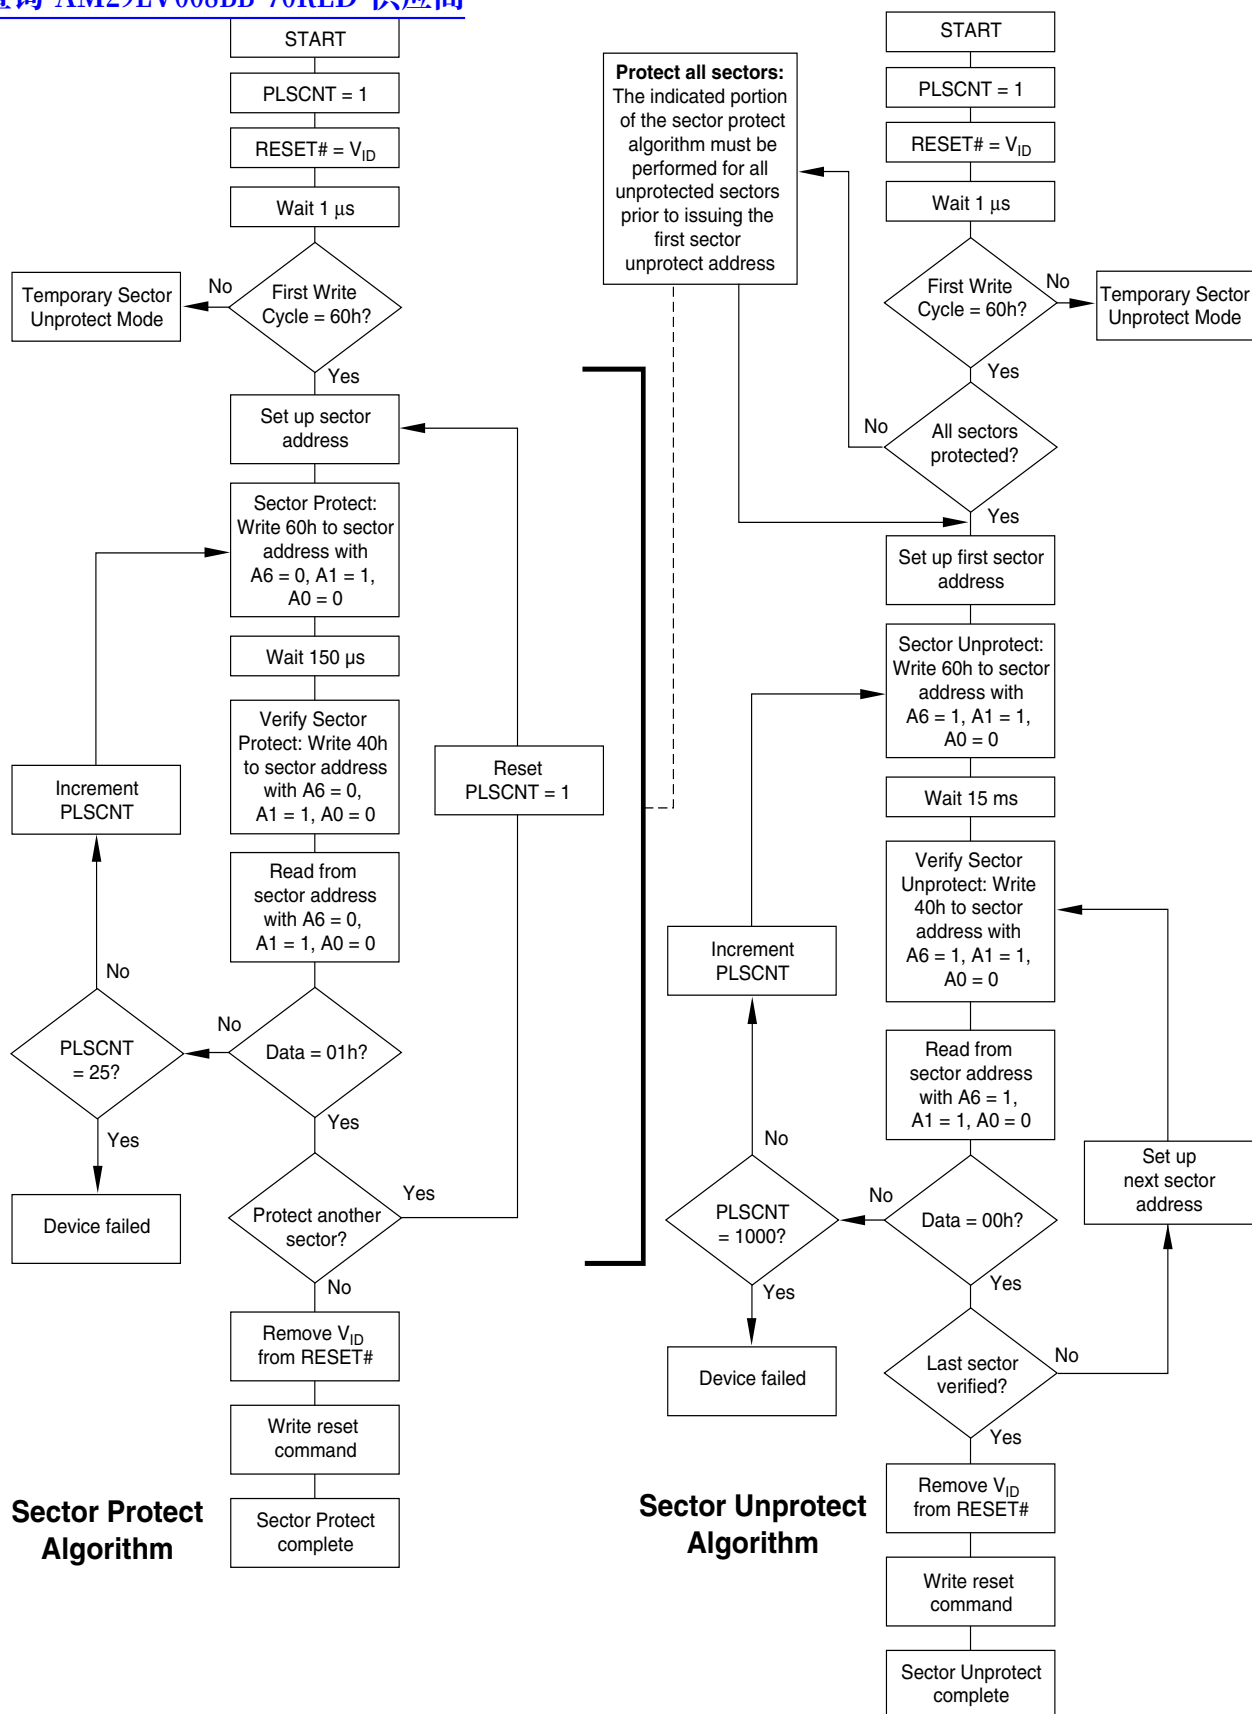
[查询"AM29LV008BB-70RED"供应商](#)


Figure 1. In-System Sector Protect/Sector Unprotect Algorithms

## Temporary Sector Unprotect

This feature allows temporary unprotection of previously protected sectors to change data in-system. The Sector Unprotect mode is activated by setting the RESET# pin to  $V_{ID}$ . During this mode, formerly protected sectors can be programmed or erased by selecting the sector addresses. Once  $V_{ID}$  is removed from the RESET# pin, all the previously protected sectors are protected again. Figure 2 shows the algorithm, and Figure 20 shows the timing diagrams, for this feature.

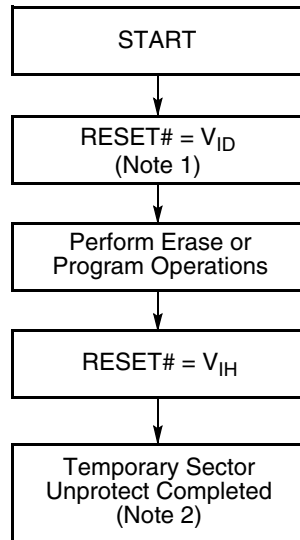

### Note:

1. All protected sectors unprotected.
2. All previously protected sectors are protected once again.

Figure 2. Temporary Sector Unprotect Operation

## Hardware Data Protection

The command sequence requirement of unlock cycles for programming or erasing provides data protection against inadvertent writes (refer to Table 5 for command definitions). In addition, the following hardware data protection measures prevent accidental erasure or programming, which might otherwise be caused by spurious system level signals during  $V_{CC}$  power-up and power-down transitions, or from system noise.

### Low $V_{CC}$ Write Inhibit

When  $V_{CC}$  is less than  $V_{LKO}$ , the device does not accept any write cycles. This protects data during  $V_{CC}$  power-up and power-down. The command register and all internal program/erase circuits are disabled, and the device resets. Subsequent writes are ignored until  $V_{CC}$  is greater than  $V_{LKO}$ . The system must provide the proper signals to the control pins to prevent unintentional writes when  $V_{CC}$  is greater than  $V_{LKO}$ .

### Write Pulse “Glitch” Protection

Noise pulses of less than 5 ns (typical) on OE#, CE# or WE# do not initiate a write cycle.

### Logical Inhibit

Write cycles are inhibited by holding any one of OE# =  $V_{IL}$ , CE# =  $V_{IH}$  or WE# =  $V_{IH}$ . To initiate a write cycle, CE# and WE# must be a logical zero while OE# is a logical one.

### Power-Up Write Inhibit

If WE# = CE# =  $V_{IL}$  and OE# =  $V_{IH}$  during power up, the device does not accept commands on the rising edge of WE#. The internal state machine is automatically reset to reading array data on power-up.



## COMMAND DEFINITIONS

Writing specific address and data commands or sequences into the command register initiates device operations. Table 5 defines the valid register command sequences. Writing **incorrect address and data values** or writing them in the **improper sequence** resets the device to reading array data.

All addresses are latched on the falling edge of WE# or CE#, whichever happens later. All data is latched on the rising edge of WE# or CE#, whichever happens first. Refer to the appropriate timing diagrams in the “AC Characteristics” section.

### Reading Array Data

The device is automatically set to reading array data after device power-up. No commands are required to retrieve data. The device is also ready to read array data after completing an Embedded Program or Embedded Erase algorithm.

After the device accepts an Erase Suspend command, the device enters the Erase Suspend mode. The system can read array data using the standard read timings, except that if it reads at an address within erase-suspended sectors, the device outputs status data. After completing a programming operation in the Erase Suspend mode, the system may once again read array data with the same exception. See “Erase Suspend/Erase Resume Commands” for more information on this mode.

The system *must* issue the reset command to re-enable the device for reading array data if DQ5 goes high, or while in the autoselect mode. See the “Reset Command” section, next.

See also “Requirements for Reading Array Data” in the “Device Bus Operations” section for more information. The Read Operations table provides the read parameters, and Figure 13 shows the timing diagram.

### Reset Command

Writing the reset command to the device resets the device to reading array data. Address bits don't care for this command.

The reset command may be written between the sequence cycles in an erase command sequence before erasing begins. This resets the device to reading array data. Once erasure begins, however, the device ignores reset commands until the operation is complete.

The reset command may be written between the sequence cycles in a program command sequence before programming begins. This resets the device to reading array data (also applies to programming in Erase Suspend mode). Once programming begins,

however, the device ignores reset commands until the operation is complete.

The reset command may be written between the sequence cycles in an autoselect command sequence. Once in the autoselect mode, the reset command *must* be written to return to reading array data (also applies to autoselect during Erase Suspend).

If DQ5 goes high during a program or erase operation, writing the reset command returns the device to reading array data (also applies during Erase Suspend).

### Autoselect Command Sequence

The autoselect command sequence allows the host system to access the manufacturer and device codes, and determine whether or not a sector is protected. Table 5 shows the address and data requirements. This method is an alternative to that shown in Table 4, which is intended for PROM programmers and requires V<sub>ID</sub> on address bit A9.

The autoselect command sequence is initiated by writing two unlock cycles, followed by the autoselect command. The device then enters the autoselect mode, and the system may read at any address any number of times, without initiating another command sequence.

A read cycle at address XX00h retrieves the manufacturer code. A read cycle at address XX01h returns the device code. A read cycle containing a sector address (SA) and the address 02h returns 01h if that sector is protected, or 00h if it is unprotected. Refer to Tables 2 and 3 for valid sector addresses.

The system must write the reset command to exit the autoselect mode and return to reading array data.

### Byte Program Command Sequence

Programming is a four-bus-cycle operation. The program command sequence is initiated by writing two unlock write cycles, followed by the program set-up command. The program address and data are written next, which in turn initiate the Embedded Program algorithm. The system is *not* required to provide further controls or timings. The device automatically provides internally generated program pulses and verifies the programmed cell margin. Table 5 shows the address and data requirements for the byte program command sequence.

When the Embedded Program algorithm is complete, the device then returns to reading array data and addresses are no longer latched. The system can determine the status of the program operation by using DQ7, DQ6, or RY/BY#. See “Write Operation Status” for information on these status bits.

Any commands written to the device during the Embedded Program Algorithm are ignored. Note that a **hardware reset** immediately terminates the programming operation. The Byte Program command sequence should be reinitiated once the device has reset to reading array data, to ensure data integrity.


Programming is allowed in any sequence and across sector boundaries. **A bit cannot be programmed from a “0” back to a “1”.** Attempting to do so may halt the operation and set DQ5 to “1”, or cause the Data# Polling algorithm to indicate the operation was successful. However, a succeeding read will show that the data is still “0”. Only erase operations can convert a “0” to a “1”.

### Unlock Bypass Command Sequence

The unlock bypass feature allows the system to program bytes or words to the device faster than using the standard program command sequence. The unlock bypass command sequence is initiated by first writing two unlock cycles. This is followed by a third write cycle containing the unlock bypass command, 20h. The device then enters the unlock bypass mode. A two-cycle unlock bypass program command sequence is all that is required to program in this mode. The first cycle in this sequence contains the unlock bypass program command, A0h; the second cycle contains the program address and data. Additional data is programmed in the same manner. This mode dispenses with the initial two unlock cycles required in the standard program command sequence, resulting in faster total programming time. The Command Definitions table shows the requirements for the command sequence.

During the unlock bypass mode, only the Unlock Bypass Program and Unlock Bypass Reset commands are valid. To exit the unlock bypass mode, the system must issue the two-cycle unlock bypass reset command sequence. The first cycle must contain the data 90h; the second cycle the data 00h. Addresses are don't care for both cycles. The device then returns to reading array data.

Figure 3 illustrates the algorithm for the program operation. See the Erase/Program Operations table in “AC Characteristics” for parameters, and Figure 15 for timing diagrams.

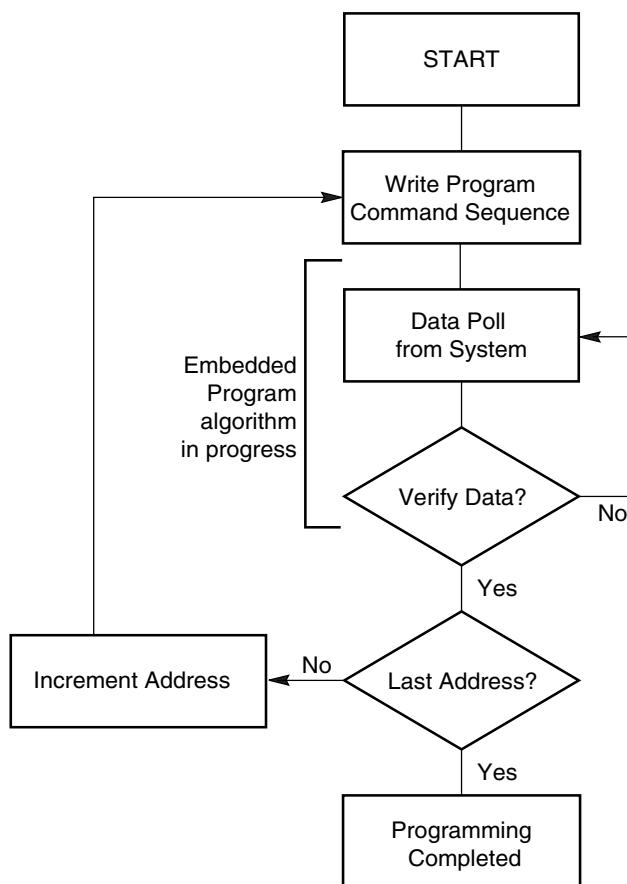

**Note:** See Table 5 for program command sequence.

**Figure 3. Program Operation**

### Chip Erase Command Sequence

Chip erase is a six bus cycle operation. The chip erase command sequence is initiated by writing two unlock cycles, followed by a set-up command. Two additional unlock write cycles are then followed by the chip erase command, which in turn invokes the Embedded Erase algorithm. The device does *not* require the system to preprogram prior to erase. The Embedded Erase algorithm automatically preprograms and verifies the entire memory for an all zero data pattern prior to electrical erase. The system is not required to provide any controls or timings during these operations. Table 5 shows the address and data requirements for the chip erase command sequence.

Any commands written to the chip during the Embedded Erase algorithm are ignored. Note that a **hardware reset** during the chip erase operation immediately terminates the operation. The Chip Erase command sequence should be reinitiated once the



device has returned to reading array data, to ensure data integrity.

[查询 Am29LV008BB-70RED"供应商"](#)

The system can determine the status of the erase operation by using DQ7, DQ6, DQ2, or RY/BY#. See “Write Operation Status” for information on these status bits. When the Embedded Erase algorithm is complete, the device returns to reading array data and addresses are no longer latched.

Figure 4 illustrates the algorithm for the erase operation. See the Erase/Program Operations tables in “AC Characteristics” for parameters, and to Figure 16 for timing diagrams.

## Sector Erase Command Sequence

Sector erase is a six bus cycle operation. The sector erase command sequence is initiated by writing two unlock cycles, followed by a set-up command. Two additional unlock write cycles are then followed by the address of the sector to be erased, and the sector erase command. Table 5 shows the address and data requirements for the sector erase command sequence.

The device does *not* require the system to preprogram the memory prior to erase. The Embedded Erase algorithm automatically programs and verifies the sector for an all zero data pattern prior to electrical erase. The system is not required to provide any controls or timings during these operations.

After the command sequence is written, a sector erase time-out of 50  $\mu$ s begins. During the time-out period, additional sector addresses and sector erase commands may be written. Loading the sector erase buffer may be done in any sequence, and the number of sectors may be from one sector to all sectors. The time between these additional cycles must be less than 50  $\mu$ s, otherwise the last address and command might not be accepted, and erasure may begin. It is recommended that processor interrupts be disabled during this time to ensure all commands are accepted. The interrupts can be re-enabled after the last Sector Erase command is written. If the time between additional sector erase commands can be assumed to be less than 50  $\mu$ s, the system need not monitor DQ3. **Any command other than Sector Erase or Erase Suspend during the time-out period resets the device to reading array data.** The system must rewrite the command sequence and any additional sector addresses and commands.

The system can monitor DQ3 to determine if the sector erase timer has timed out. (See the “DQ3: Sector Erase Timer” section.) The time-out begins from the rising edge of the final WE# pulse in the command sequence.

Once the sector erase operation has begun, only the Erase Suspend command is valid. All other commands are ignored. Note that a **hardware reset** during the sector erase operation immediately terminates the

operation. The Sector Erase command sequence should be reinitiated once the device has returned to reading array data, to ensure data integrity.

When the Embedded Erase algorithm is complete, the device returns to reading array data and addresses are no longer latched. The system can determine the status of the erase operation by using DQ7, DQ6, DQ2, or RY/BY#. Refer to “Write Operation Status” for information on these status bits.

Figure 4 illustrates the algorithm for the erase operation. Refer to the Erase/Program Operations tables in the “AC Characteristics” section for parameters, and to Figure 16 for timing waveforms.

## Erase Suspend/Erase Resume Commands

The Erase Suspend command allows the system to interrupt a sector erase operation and then read data from, or program data to, any sector not selected for erasure. This command is valid only during the sector erase operation, including the 50  $\mu$ s time-out period during the sector erase command sequence. The Erase Suspend command is ignored if written during the chip erase operation or Embedded Program algorithm. Writing the Erase Suspend command during the Sector Erase time-out immediately terminates the time-out period and suspends the erase operation. Addresses are “don’t-cares” when writing the Erase Suspend command.

When the Erase Suspend command is written during a sector erase operation, the device requires a maximum of 20  $\mu$ s to suspend the erase operation. However, when the Erase Suspend command is written during the sector erase time-out, the device immediately terminates the time-out period and suspends the erase operation.


After the erase operation has been suspended, the system can read array data from or program data to any sector not selected for erasure. (The device “erase suspends” all sectors selected for erasure.) Normal read and write timings and command definitions apply. Reading at any address within erase-suspended sectors produces status data on DQ7–DQ0. The system can use DQ7, or DQ6 and DQ2 together, to determine if a sector is actively erasing or is erase-suspended. See “Write Operation Status” for information on these status bits.

After an erase-suspended program operation is complete, the system can once again read array data within non-suspended sectors. The system can determine the status of the program operation using the DQ7 or DQ6 status bits, just as in the standard program operation. See “Write Operation Status” for more information.

The system may also write the autoselect command sequence when the device is in the Erase Suspend

mode. The device allows reading autoselect codes even at addresses within erasing sectors, since the codes are not stored in the memory array. When the device exits the autoselect mode, the device reverts to the Erase Suspend mode, and is ready for another valid operation. See “Autoselect Command Sequence” for more information.

The system must write the Erase Resume command (address bits are “don’t care”) to exit the erase suspend mode and continue the sector erase operation. Further writes of the Resume command are ignored. Another Erase Suspend command can be written after the device has resumed erasing.

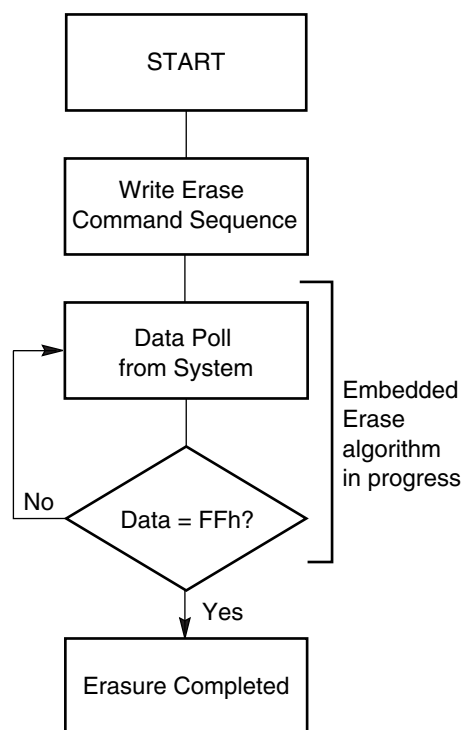

**Notes:**

1. See Table 5 for erase command sequence.
2. See “DQ3: Sector Erase Timer” for more information.

**Figure 4. Erase Operation**

## Command Definitions

[查询"AM29LV008BB-70RED"供应商](#)

Table 5. Am29LV008B Command Definitions

| Command Sequence<br>(Note 1)   |                                   | Cycles | Bus Cycles (Notes 2-4) |      |        |      |       |      |             |          |       |      |       |      |
|--------------------------------|-----------------------------------|--------|------------------------|------|--------|------|-------|------|-------------|----------|-------|------|-------|------|
|                                |                                   |        | First                  |      | Second |      | Third |      | Fourth      |          | Fifth |      | Sixth |      |
|                                |                                   |        | Addr                   | Data | Addr   | Data | Addr  | Data | Addr        | Data     | Addr  | Data | Addr  | Data |
| Read (Note 5)                  |                                   | 1      | RA                     | RD   |        |      |       |      |             |          |       |      |       |      |
| Reset (Note 6)                 |                                   | 1      | XXX                    | F0   |        |      |       |      |             |          |       |      |       |      |
| Auto-select<br>(Note 7)        | Manufacturer ID                   | 4      | 555                    | AA   | 2AA    | 55   | 555   | 90   | X00         | 01       |       |      |       |      |
|                                | Device ID, Top Boot Block         | 4      | 555                    | AA   | 2AA    | 55   | 555   | 90   | X01         | 3E       |       |      |       |      |
|                                | Device ID, Bottom Boot Block      | 4      | 555                    | AA   | 2AA    | 55   | 555   | 90   | X01         | 37       |       |      |       |      |
|                                | Sector Protect Verify<br>(Note 8) | 4      | 555                    | AA   | 2AA    | 55   | 555   | 90   | (SA)<br>X02 | 00<br>01 |       |      |       |      |
| Program                        |                                   | 4      | 555                    | AA   | 2AA    | 55   | 555   | A0   | PA          | PD       |       |      |       |      |
| Unlock Bypass                  |                                   | 3      | 555                    | AA   | 2AA    | 55   | 555   | 20   |             |          |       |      |       |      |
| Unlock Bypass Program (Note 9) |                                   | 2      | XXX                    | A0   | PA     | PD   |       |      |             |          |       |      |       |      |
| Unlock Bypass Reset (Note 10)  |                                   | 2      | XXX                    | 90   | XXX    | 00   |       |      |             |          |       |      |       |      |
| Chip Erase                     |                                   | 6      | 555                    | AA   | 2AA    | 55   | 555   | 80   | 555         | AA       | 2AA   | 55   | 555   | 10   |
| Sector Erase                   |                                   | 6      | 555                    | AA   | 2AA    | 55   | 555   | 80   | 555         | AA       | 2AA   | 55   | SA    | 30   |
| Erase Suspend (Note 11)        |                                   | 1      | XXX                    | B0   |        |      |       |      |             |          |       |      |       |      |
| Erase Resume (Note 12)         |                                   | 1      | XXX                    | 30   |        |      |       |      |             |          |       |      |       |      |

**Legend:***X = Don't care**RA = Address of the memory location to be read.**RD = Data read from location RA during read operation.**PA = Address of the memory location to be programmed.**Addresses latch on the falling edge of the WE# or CE# pulse, whichever happens later.**PD = Data to be programmed at location PA. Data latches on the rising edge of WE# or CE# pulse, whichever happens first.**SA = Address of the sector to be verified (in autoselect mode) or erased. Address bits A19–A13 uniquely select any sector.***Notes:**

- See Table 1 for description of bus operations.
- All values are in hexadecimal.
- Except when reading array or autoselect data, all bus cycles are write operations.
- Address bits A19–A11 are don't cares for unlock and command cycles.
- No unlock or command cycles required when reading array data.
- The Reset command is required to return to reading array data when device is in the autoselect mode, or if DQ5 goes high (while the device is providing status data).
- The fourth cycle of the autoselect command sequence is a read cycle.
- The data is 00h for an unprotected sector and 01h for a protected sector. See "Autoselect Command Sequence" for more information.
- The Unlock Bypass command is required prior to the Unlock Bypass Program command.
- The Unlock Bypass Reset command is required to return to reading array data when the device is in the unlock bypass mode.
- The system may read and program in non-erasing sectors, or enter the autoselect mode, when in the Erase Suspend mode. The Erase Suspend command is valid only during a sector erase operation.
- The Erase Resume command is valid only during the Erase Suspend mode.

## WRITE OPERATION STATUS

The device provides several bits to determine the status of a write operation: DQ2, DQ3, DQ5, DQ6, DQ7, and RY/BY#. Table 6 and the following subsections describe the functions of these bits. DQ7, RY/BY#, and DQ6 each offer a method for determining whether a program or erase operation is complete or in progress. These three bits are discussed first.

### DQ7: Data# Polling

The Data# Polling bit, DQ7, indicates to the host system whether an Embedded Algorithm is in progress or completed, or whether the device is in Erase Suspend. Data# Polling is valid after the rising edge of the final WE# pulse in the program or erase command sequence.


During the Embedded Program algorithm, the device outputs on DQ7 the complement of the datum programmed to DQ7. This DQ7 status also applies to programming during Erase Suspend. When the Embedded Program algorithm is complete, the device outputs the datum programmed to DQ7. The system must provide the program address to read valid status information on DQ7. If a program address falls within a protected sector, Data# Polling on DQ7 is active for approximately 1  $\mu$ s, then the device returns to reading array data.

During the Embedded Erase algorithm, Data# Polling produces a “0” on DQ7. When the Embedded Erase algorithm is complete, or if the device enters the Erase Suspend mode, Data# Polling produces a “1” on DQ7. This is analogous to the complement/true datum output described for the Embedded Program algorithm: the erase function changes all the bits in a sector to “1”; prior to this, the device outputs the “complement,” or “0.” The system must provide an address within any of the sectors selected for erasure to read valid status information on DQ7.

After an erase command sequence is written, if all sectors selected for erasing are protected, Data# Polling on DQ7 is active for approximately 100  $\mu$ s, then the device returns to reading array data. If not all selected sectors are protected, the Embedded Erase algorithm erases the unprotected sectors, and ignores the selected sectors that are protected.

When the system detects DQ7 has changed from the complement to true data, it can read valid data at DQ7–DQ0 on the *following* read cycles. This is because DQ7 may change asynchronously with DQ0–DQ6 while Output Enable (OE#) is asserted low. Figure 17, Data# Polling Timings (During Embedded Algorithms), in the “AC Characteristics” section illustrates this.

Table 6 shows the outputs for Data# Polling on DQ7. Figure 5 shows the Data# Polling algorithm.

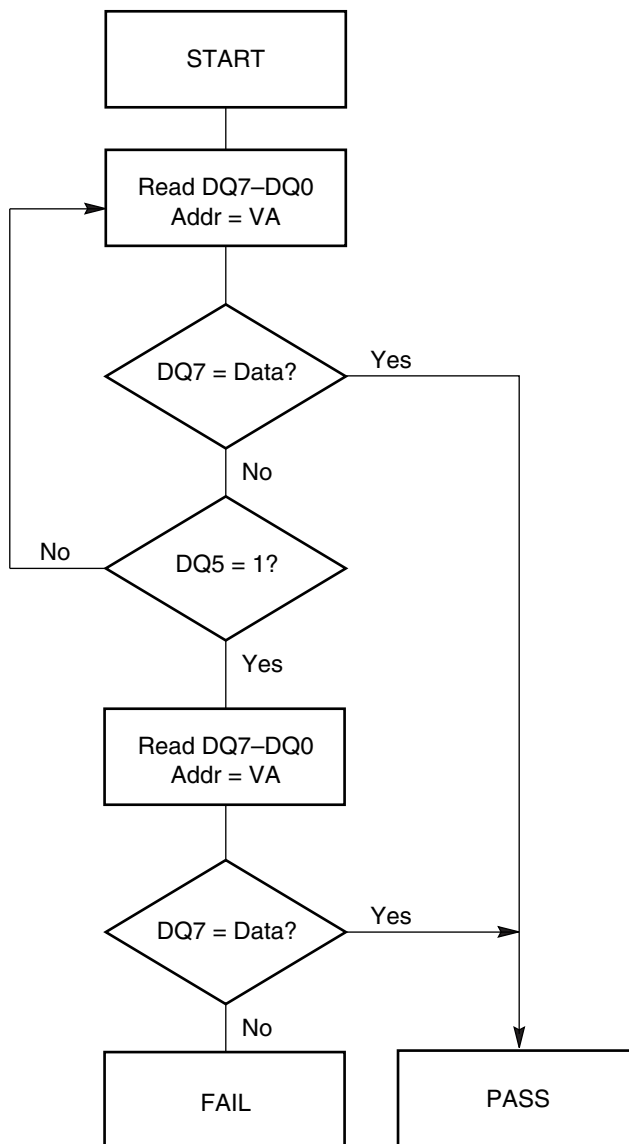

#### Notes:

1. VA = Valid address for programming. During a sector erase operation, a valid address is an address within any sector selected for erasure. During chip erase, a valid address is any non-protected sector address.
2. DQ7 should be rechecked even if DQ5 = “1” because DQ7 may change simultaneously with DQ5.

**Figure 5. Data# Polling Algorithm**

**RY/BY#: Ready/Busy#**

查询"AM29LV008BB-70BED"供应商  
The RY/BY# is a dedicated, open-drain output pin that indicates whether an Embedded Algorithm is in progress or complete. The RY/BY# status is valid after the rising edge of the final WE# pulse in the command sequence. Since RY/BY# is an open-drain output, several RY/BY# pins can be tied together in parallel with a pull-up resistor to V<sub>CC</sub>.

If the output is low (Busy), the device is actively erasing or programming. (This includes programming in the Erase Suspend mode.) If the output is high (Ready), the device is ready to read array data (including during the Erase Suspend mode), or is in the standby mode.

Table 6 shows the outputs for RY/BY#. Figures 13, 14, 15 and 16 shows RY/BY# for read, reset, program, and erase operations, respectively.

**DQ6: Toggle Bit I**

Toggle Bit I on DQ6 indicates whether an Embedded Program or Erase algorithm is in progress or complete, or whether the device has entered the Erase Suspend mode. Toggle Bit I may be read at any address, and is valid after the rising edge of the final WE# pulse in the command sequence (prior to the program or erase operation), and during the sector erase time-out.

During an Embedded Program or Erase algorithm operation, successive read cycles to any address cause DQ6 to toggle. (The system may use either OE# or CE# to control the read cycles.) When the operation is complete, DQ6 stops toggling.

After an erase command sequence is written, if all sectors selected for erasing are protected, DQ6 toggles for approximately 100  $\mu$ s, then returns to reading array data. If not all selected sectors are protected, the Embedded Erase algorithm erases the unprotected sectors, and ignores the selected sectors that are protected.

The system can use DQ6 and DQ2 together to determine whether a sector is actively erasing or is erase-suspended. When the device is actively erasing (that is, the Embedded Erase algorithm is in progress), DQ6 toggles. When the device enters the Erase Suspend mode, DQ6 stops toggling. However, the system must also use DQ2 to determine which sectors are erasing or erase-suspended. Alternatively, the system can use DQ7 (see the subsection on DQ7: Data# Polling).

If a program address falls within a protected sector, DQ6 toggles for approximately 1  $\mu$ s after the program command sequence is written, then returns to reading array data.

DQ6 also toggles during the erase-suspend-program mode, and stops toggling once the Embedded Program algorithm is complete.

Table 6 shows the outputs for Toggle Bit I on DQ6. Refer to Figure 6 shows the toggle bit algorithm and to Figure 18 in the "AC Characteristics" section for the timing diagrams. Figure 19 shows the differences between DQ2 and DQ6 in graphical form. See also the subsection on "DQ2: Toggle Bit II".

**DQ2: Toggle Bit II**

The "Toggle Bit II" on DQ2, when used with DQ6, indicates whether a particular sector is actively erasing (that is, the Embedded Erase algorithm is in progress), or whether that sector is erase-suspended. Toggle Bit II is valid after the rising edge of the final WE# pulse in the command sequence.

DQ2 toggles when the system reads at addresses within those sectors that have been selected for erasure. (The system may use either OE# or CE# to control the read cycles.) But DQ2 cannot distinguish whether the sector is actively erasing or is erase-suspended. DQ6, by comparison, indicates whether the device is actively erasing, or is in Erase Suspend, but cannot distinguish which sectors are selected for erasure. Thus, both status bits are required for sector and mode information. Refer to Table 6 to compare outputs for DQ2 and DQ6.

Figure 6 shows the toggle bit algorithm in flowchart form, and the section "DQ2: Toggle Bit II" explains the algorithm. See also the DQ6: Toggle Bit I subsection. Refer to Figure 18 for the toggle bit timing diagram. Figure 19 shows the differences between DQ2 and DQ6 in graphical form.


**Reading Toggle Bits DQ6/DQ2**

Refer to Figure 6 for the following discussion. Whenever the system initially begins reading toggle bit status, it must read DQ7–DQ0 at least twice in a row to determine whether a toggle bit is toggling. Typically, the system would note and store the value of the toggle bit after the first read. After the second read, the system would compare the new value of the toggle bit with the first. If the toggle bit is not toggling, the device has completed the program or erase operation. The system can read array data on DQ7–DQ0 on the following read cycle.

However, if after the initial two read cycles, the system determines that the toggle bit is still toggling, the system also should note whether the value of DQ5 is high (see the section on DQ5). If it is, the system should then determine again whether the toggle bit is toggling, since the toggle bit may have stopped toggling just as DQ5 went high. If the toggle bit is no longer toggling, the device has successfully completed the program or erase operation. If it is still toggling, the device did not completed the operation successfully, and the system must write the reset command to return to reading array data.



The remaining scenario is that the system initially determines that the toggle bit is toggling and DQ5 has not gone high. The system may continue to monitor the toggle bit and DQ5 through successive read cycles, determining the status as described in the previous paragraph. Alternatively, it may choose to perform other system tasks. In this case, the system must start at the beginning of the algorithm when it returns to determine the status of the operation (top of Figure 6).

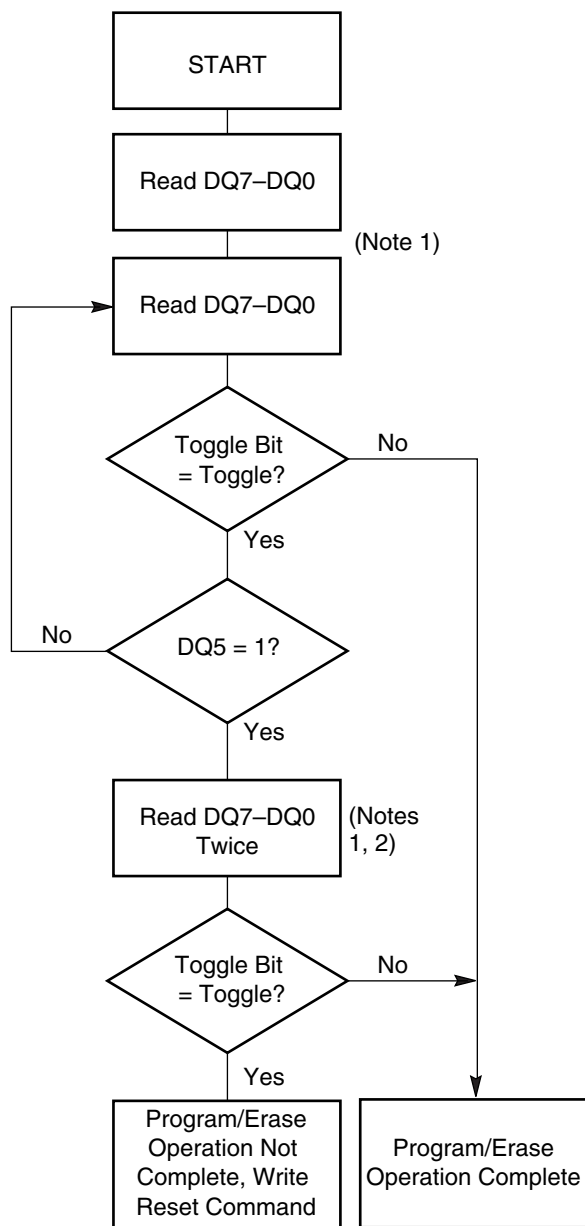

**Notes:**

1. Read toggle bit twice to determine whether or not it is toggling. See text.
2. Recheck toggle bit because it may stop toggling as DQ5 changes to "1". See text.

**Figure 6. Toggle Bit Algorithm**

## DQ5: Exceeded Timing Limits

DQ5 indicates whether the program or erase time has exceeded a specified internal pulse count limit. Under these conditions DQ5 produces a "1." This is a failure condition that indicates the program or erase cycle was not successfully completed.

The DQ5 failure condition may appear if the system tries to program a "1" to a location that is previously programmed to "0." **Only an erase operation can change a "0" back to a "1."** Under this condition, the device halts the operation, and when the operation has exceeded the timing limits, DQ5 produces a "1."

Under both these conditions, the system must issue the reset command to return the device to reading array data.

## DQ3: Sector Erase Timer

After writing a sector erase command sequence, the system may read DQ3 to determine whether or not an erase operation has begun. (The sector erase timer does not apply to the chip erase command.) If additional sectors are selected for erasure, the entire time-out also applies after each additional sector erase command. When the time-out is complete, DQ3 switches from "0" to "1." The system may ignore DQ3 if the system can guarantee that the time between additional sector erase commands will always be less than 50  $\mu$ s. See also the "Sector Erase Command Sequence" section.

After the sector erase command sequence is written, the system should read the status on DQ7 (Data# Polling) or DQ6 (Toggle Bit I) to ensure the device has accepted the command sequence, and then read DQ3. If DQ3 is "1", the internally controlled erase cycle has begun; all further commands (other than Erase Suspend) are ignored until the erase operation is complete. If DQ3 is "0", the device will accept additional sector erase commands. To ensure the command has been accepted, the system software should check the status of DQ3 prior to and following each subsequent sector erase command. If DQ3 is high on the second status check, the last command might not have been accepted. Table 6 shows the outputs for DQ3.

Table 6. Write Operation Status

| Operation          |                                           | DQ7<br>(Note 2) | DQ6       | DQ5<br>(Note 1) | DQ3  | DQ2<br>(Note 2) | RY/BY# |
|--------------------|-------------------------------------------|-----------------|-----------|-----------------|------|-----------------|--------|
| Standard Mode      | Embedded Program Algorithm                | DQ7#            | Toggle    | 0               | N/A  | No toggle       | 0      |
|                    | Embedded Erase Algorithm                  | 0               | Toggle    | 0               | 1    | Toggle          | 0      |
| Erase Suspend Mode | Reading within Erase Suspended Sector     | 1               | No toggle | 0               | N/A  | Toggle          | 1      |
|                    | Reading within Non-Erase Suspended Sector | Data            | Data      | Data            | Data | Data            | 1      |
|                    | Erase-Suspend-Program                     | DQ7#            | Toggle    | 0               | N/A  | N/A             | 0      |

**Notes:**

1. DQ5 switches to '1' when an Embedded Program or Embedded Erase operation has exceeded the maximum timing limits. See "DQ5: Exceeded Timing Limits" for more information.
2. DQ7 and DQ2 require a valid address when reading status information. Refer to the appropriate subsection for further details.



**ABSOLUTE MAXIMUM RATINGS**

Storage Temperature  
Plastic Packages . . . . .  $-65^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$

Ambient Temperature  
with Power Applied. . . . .  $-65^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

Voltage with Respect to Ground

$V_{CC}$  (Note 1) . . . . .  $-0.5\text{ V}$  to  $+4.0\text{ V}$

A9, OE#, and  
RESET# (Note 2). . . . .  $-0.5\text{ V}$  to  $+12.5\text{ V}$


All other pins (Note 1) . . . . .  $-0.5\text{ V}$  to  $V_{CC}+0.5\text{ V}$

Output Short Circuit Current (Note 3) . . . . . 200 mA


**Notes:**

1. Minimum DC voltage on input or I/O pins is  $-0.5\text{ V}$ . During voltage transitions, input or I/O pins may undershoot  $V_{SS}$  to  $-2.0\text{ V}$  for periods of up to 20 ns. See Figure 7. Maximum DC voltage on input or I/O pins is  $V_{CC}+0.5\text{ V}$ . During voltage transitions, input or I/O pins may overshoot to  $V_{CC}+2.0\text{ V}$  for periods up to 20 ns. See Figure 8.
2. Minimum DC input voltage on pins A9, OE#, and RESET# is  $-0.5\text{ V}$ . During voltage transitions, A9, OE#, and RESET# may undershoot  $V_{SS}$  to  $-2.0\text{ V}$  for periods of up to 20 ns. See Figure 7. Maximum DC input voltage on pin A9 is  $+12.5\text{ V}$  which may overshoot to  $14.0\text{ V}$  for periods up to 20 ns.
3. No more than one output may be shorted to ground at a time. Duration of the short circuit should not be greater than one second.

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational sections of this data sheet is not implied. Exposure of the device to absolute maximum rating conditions for extended periods may affect device reliability.

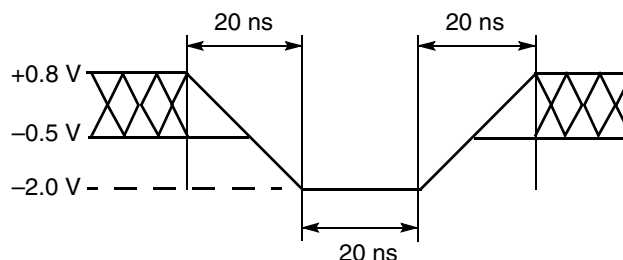

**Figure 7. Maximum Negative Overshoot Waveform**

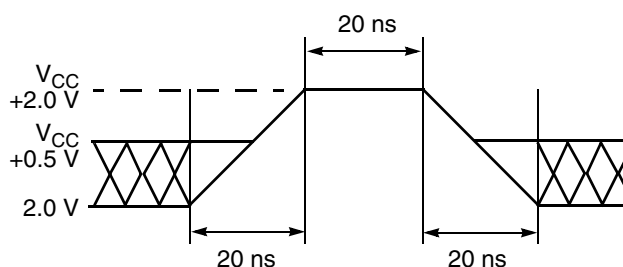

**Figure 8. Maximum Positive Overshoot Waveform**

**OPERATING RANGES****Commercial (C) Devices**

Ambient Temperature ( $T_A$ ) . . . . .  $0^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$

**Industrial (I) Devices**

Ambient Temperature ( $T_A$ ) . . . . .  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

**Extended (E) Devices**

Ambient Temperature ( $T_A$ ) . . . . .  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

 **$V_{CC}$  Supply Voltages**

$V_{CC}$  for regulated voltage range. . . . .  $+3.0\text{ V}$  to  $+3.6\text{ V}$

$V_{CC}$  for full voltage range. . . . .  $+2.7\text{ V}$  to  $+3.6\text{ V}$

Operating ranges define those limits between which the functionality of the device is guaranteed.

## DC CHARACTERISTICS

本海"AM29LV008BB-70RED"供应商

CMOS Compatible


| Parameter | Description                                              | Test Conditions                                                |       | Min                 | Typ | Max            | Unit    |
|-----------|----------------------------------------------------------|----------------------------------------------------------------|-------|---------------------|-----|----------------|---------|
| $I_{LI}$  | Input Load Current                                       | $V_{IN} = V_{SS}$ to $V_{CC}$ ,<br>$V_{CC} = V_{CC\ max}$      |       |                     |     | $\pm 1.0$      | $\mu A$ |
| $I_{LIT}$ | A9 Input Load Current                                    | $V_{CC} = V_{CC\ max}$ ; A9 = 12.5 V                           |       |                     |     | 35             | $\mu A$ |
| $I_{LO}$  | Output Leakage Current                                   | $V_{OUT} = V_{SS}$ to $V_{CC}$ ,<br>$V_{CC} = V_{CC\ max}$     |       |                     |     | $\pm 1.0$      | $\mu A$ |
| $I_{CC1}$ | $V_{CC}$ Active Read Current<br>(Notes 1, 2)             | $CE\# = V_{IL}$ , $OE\# = V_{IH}$                              | 5 MHz |                     | 7   | 12             | mA      |
|           |                                                          |                                                                | 1 MHz |                     | 2   | 4              |         |
| $I_{CC2}$ | $V_{CC}$ Active Write Current<br>(Notes 2, 3, 5)         | $CE\# = V_{IL}$ , $OE\# = V_{IH}$                              |       |                     | 15  | 30             | mA      |
| $I_{CC3}$ | $V_{CC}$ Standby Current (Note 2)                        | $CE\#, RESET\# = V_{CC} \pm 0.3\ V$                            |       |                     | 0.2 | 5              | $\mu A$ |
| $I_{CC4}$ | $V_{CC}$ Standby Current During Reset<br>(Note 2)        | $RESET\# = V_{SS} \pm 0.3\ V$                                  |       |                     | 0.2 | 5              | $\mu A$ |
| $I_{CC5}$ | Automatic Sleep Mode (Notes 2, 4)                        | $V_{IH} = V_{CC} \pm 0.3\ V$ ;<br>$V_{IL} = V_{SS} \pm 0.3\ V$ |       |                     | 0.2 | 5              | $\mu A$ |
| $V_{IL}$  | Input Low Voltage                                        |                                                                |       | -0.5                |     | 0.8            | V       |
| $V_{IH}$  | Input High Voltage                                       |                                                                |       | $0.7 \times V_{CC}$ |     | $V_{CC} + 0.3$ | V       |
| $V_{ID}$  | Voltage for Autoselect and<br>Temporary Sector Unprotect | $V_{CC} = 3.3\ V$                                              |       | 11.5                |     | 12.5           | V       |
| $V_{OL}$  | Output Low Voltage                                       | $I_{OL} = 4.0\ mA$ , $V_{CC} = V_{CC\ min}$                    |       |                     |     | 0.45           | V       |
| $V_{OH1}$ | Output High Voltage                                      | $I_{OH} = -2.0\ mA$ , $V_{CC} = V_{CC\ min}$                   |       | $0.85\ V_{CC}$      |     |                | V       |
| $V_{OH2}$ |                                                          | $I_{OH} = -100\ \mu A$ , $V_{CC} = V_{CC\ min}$                |       | $V_{CC} - 0.4$      |     |                |         |
| $V_{LKO}$ | Low $V_{CC}$ Lock-Out Voltage (Note 4)                   |                                                                |       | 2.3                 |     | 2.5            | V       |

**Notes:**

1. The  $I_{CC}$  current listed is typically less than 2 mA/MHz, with  $OE\#$  at  $V_{IH}$ . Typical  $V_{CC}$  is 3.0 V.
2. Maximum  $I_{CC}$  specifications are tested with  $V_{CC} = V_{CC\ max}$ .
3.  $I_{CC}$  active while Embedded Erase or Embedded Program is in progress.
4. Automatic sleep mode enables the low power mode when addresses remain stable for  $t_{ACC} + 30\ ns$ .
5. Not 100% tested.


## DC CHARACTERISTICS (continued)

Zero Power Flash

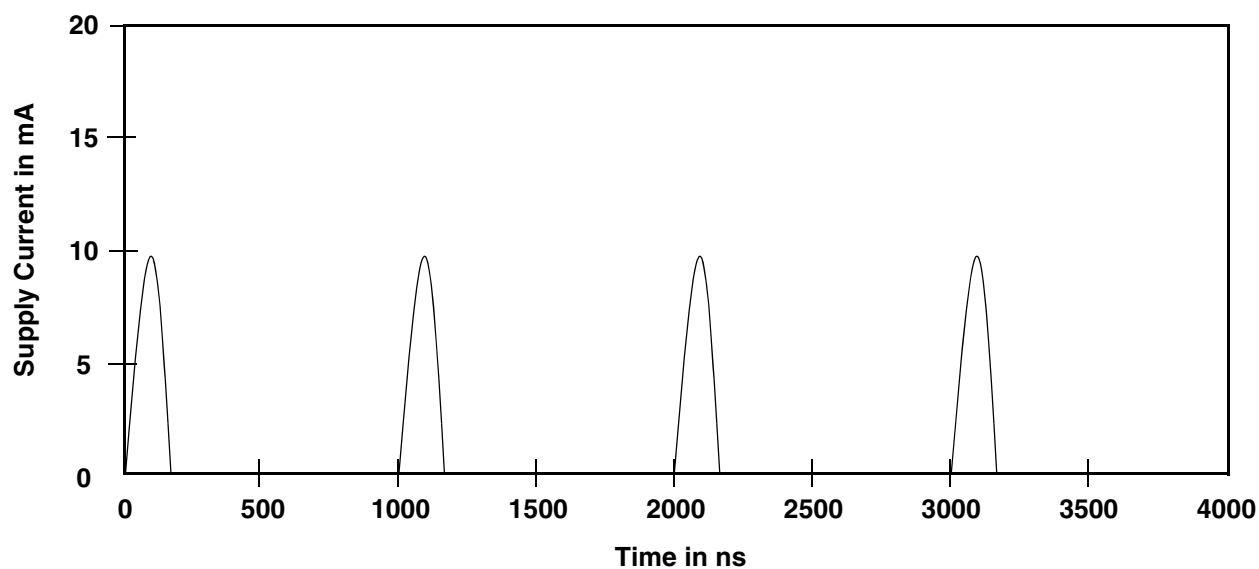

Note: Addresses are switching at 1 MHz

Figure 9.  $I_{CC1}$  Current vs. Time (Showing Active and Automatic Sleep Currents)

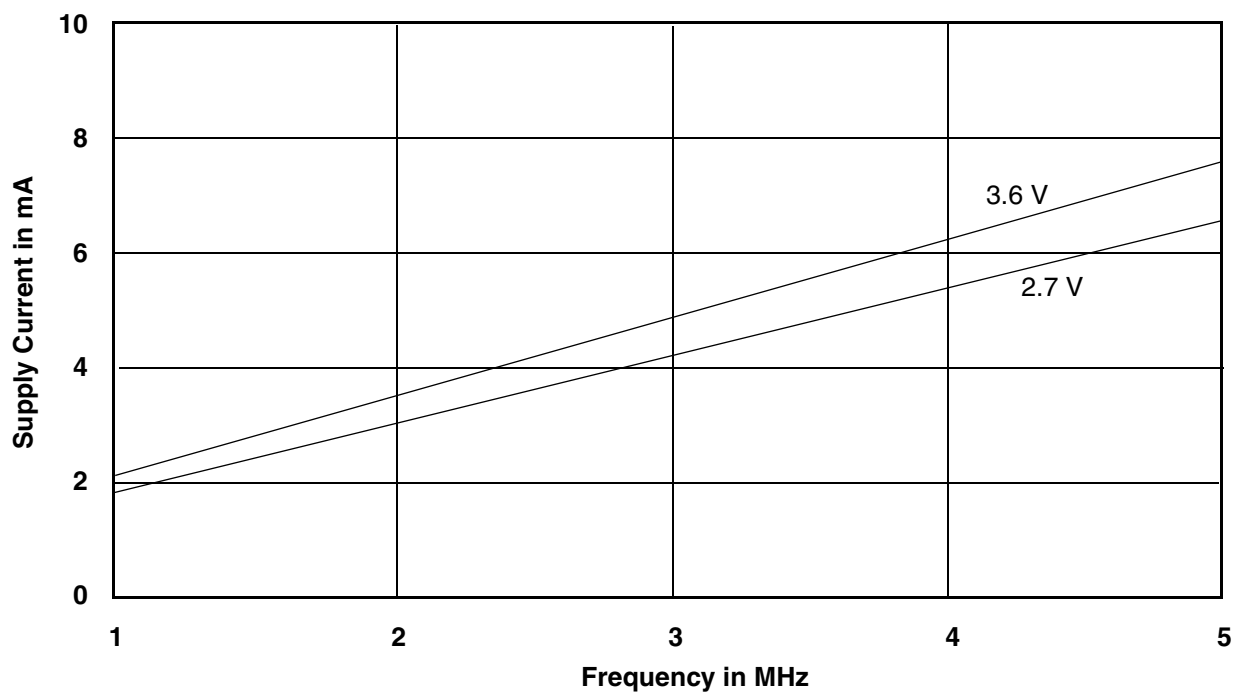


Note:  $T = 25^{\circ}\text{C}$

Figure 10. Typical  $I_{CC1}$  vs. Frequency

## TEST CONDITIONS

[查询"AM29LV008BB-70RED"供应商](#)

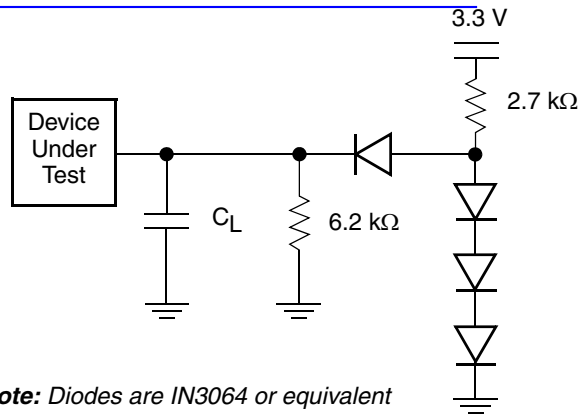

**Note:** Diodes are IN3064 or equivalent


**Figure 11. Test Setup**

**Table 7. Test Specifications**

| Test Condition                                                | -70R       | -90,<br>-120 | Unit |
|---------------------------------------------------------------|------------|--------------|------|
| Output Load                                                   | 1 TTL gate |              |      |
| Output Load Capacitance, $C_L$<br>(including jig capacitance) | 30         | 100          | pF   |
| Input Rise and Fall Times                                     | 5          |              | ns   |
| Input Pulse Levels                                            | 0.0–3.0    |              | V    |
| Input timing measurement<br>reference levels                  | 1.5        |              | V    |
| Output timing measurement<br>reference levels                 | 1.5        |              | V    |

## Key to Switching Waveforms

| WAVEFORM | INPUTS                           | OUTPUTS                                      |
|----------|----------------------------------|----------------------------------------------|
|          | Steady                           |                                              |
|          | Changing from H to L             |                                              |
|          | Changing from L to H             |                                              |
|          | Don't Care, Any Change Permitted | Changing, State Unknown                      |
|          | Does Not Apply                   | Center Line is High Impedance State (High Z) |



**Figure 12. Input Waveforms and Measurement Levels**

## AC CHARACTERISTICS

[查询"AM29LV008BB-70RED"供应商](#)

## Read Operations

| Parameter         |                  | Description                                                                  |                          | Test Setup                                     |     | Speed Options |     |      | Unit |
|-------------------|------------------|------------------------------------------------------------------------------|--------------------------|------------------------------------------------|-----|---------------|-----|------|------|
| JEDEC             | Std              |                                                                              |                          |                                                |     | -70R          | -90 | -120 |      |
| t <sub>AVAV</sub> | t <sub>RC</sub>  | Read Cycle Time (Note 1)                                                     |                          |                                                | Min | 70            | 90  | 120  | ns   |
| t <sub>AVQV</sub> | t <sub>ACC</sub> | Address to Output Delay                                                      |                          | CE# = V <sub>IL</sub><br>OE# = V <sub>IL</sub> | Max | 70            | 90  | 120  | ns   |
| t <sub>ELQV</sub> | t <sub>CE</sub>  | Chip Enable to Output Delay                                                  |                          | OE# = V <sub>IL</sub>                          | Max | 70            | 90  | 120  | ns   |
| t <sub>GLQV</sub> | t <sub>OE</sub>  | Output Enable to Output Delay                                                |                          |                                                | Max | 30            | 35  | 50   | ns   |
| t <sub>EHQZ</sub> | t <sub>DF</sub>  | Chip Enable to Output High Z (Note 1)                                        |                          |                                                | Max | 25            | 30  | 30   | ns   |
| t <sub>GHQZ</sub> | t <sub>DF</sub>  | Output Enable to Output High Z (Note 1)                                      |                          |                                                | Max | 25            | 30  | 30   | ns   |
|                   | t <sub>OEh</sub> | Output Enable Hold Time (Note 1)                                             | Read                     |                                                | Min | 0             |     |      | ns   |
|                   |                  |                                                                              | Toggle and Data# Polling |                                                | Min | 10            |     |      | ns   |
| t <sub>AXQX</sub> | t <sub>OH</sub>  | Output Hold Time From Addresses, CE# or OE#, Whichever Occurs First (Note 1) |                          |                                                | Min | 0             |     |      | ns   |

**Notes:**

1. Not 100% tested.
2. See Figure 11 and Table 7 for test specifications.

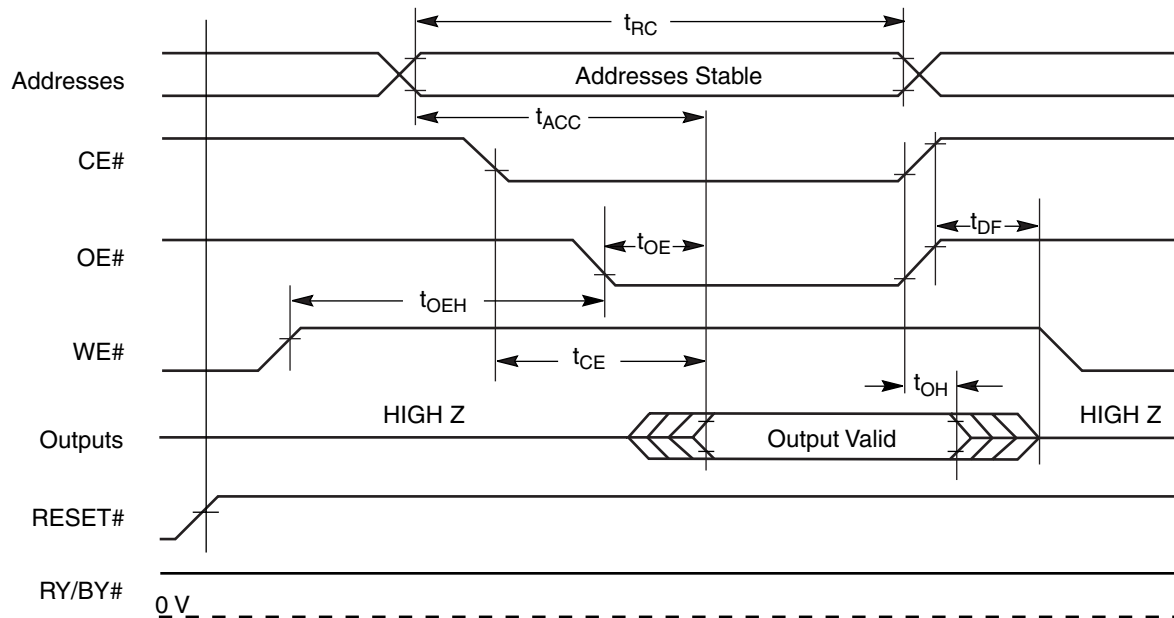


Figure 13. Read Operations Timings

## AC CHARACTERISTICS

## Hardware Reset (RESET#)

| Parameter |                    | Description                                                                 | Test Setup |     | All Speed Options | Unit          |
|-----------|--------------------|-----------------------------------------------------------------------------|------------|-----|-------------------|---------------|
| JEDEC     | Std                |                                                                             |            |     |                   |               |
|           | $t_{\text{READY}}$ | RESET# Pin Low (During Embedded Algorithms) to Read or Write (See Note)     |            | Max | 20                | $\mu\text{s}$ |
|           | $t_{\text{READY}}$ | RESET# Pin Low (NOT During Embedded Algorithms) to Read or Write (See Note) |            | Max | 500               | ns            |
|           | $t_{\text{RP}}$    | RESET# Pulse Width                                                          |            | Min | 500               | ns            |
|           | $t_{\text{RH}}$    | RESET# High Time Before Read (See Note)                                     |            | Min | 50                | ns            |
|           | $t_{\text{RPD}}$   | RESET# Low to Standby Mode                                                  |            | Min | 20                | $\mu\text{s}$ |
|           | $t_{\text{RB}}$    | RY/BY# Recovery Time                                                        |            | Min | 0                 | ns            |

**Note:** Not 100% tested.

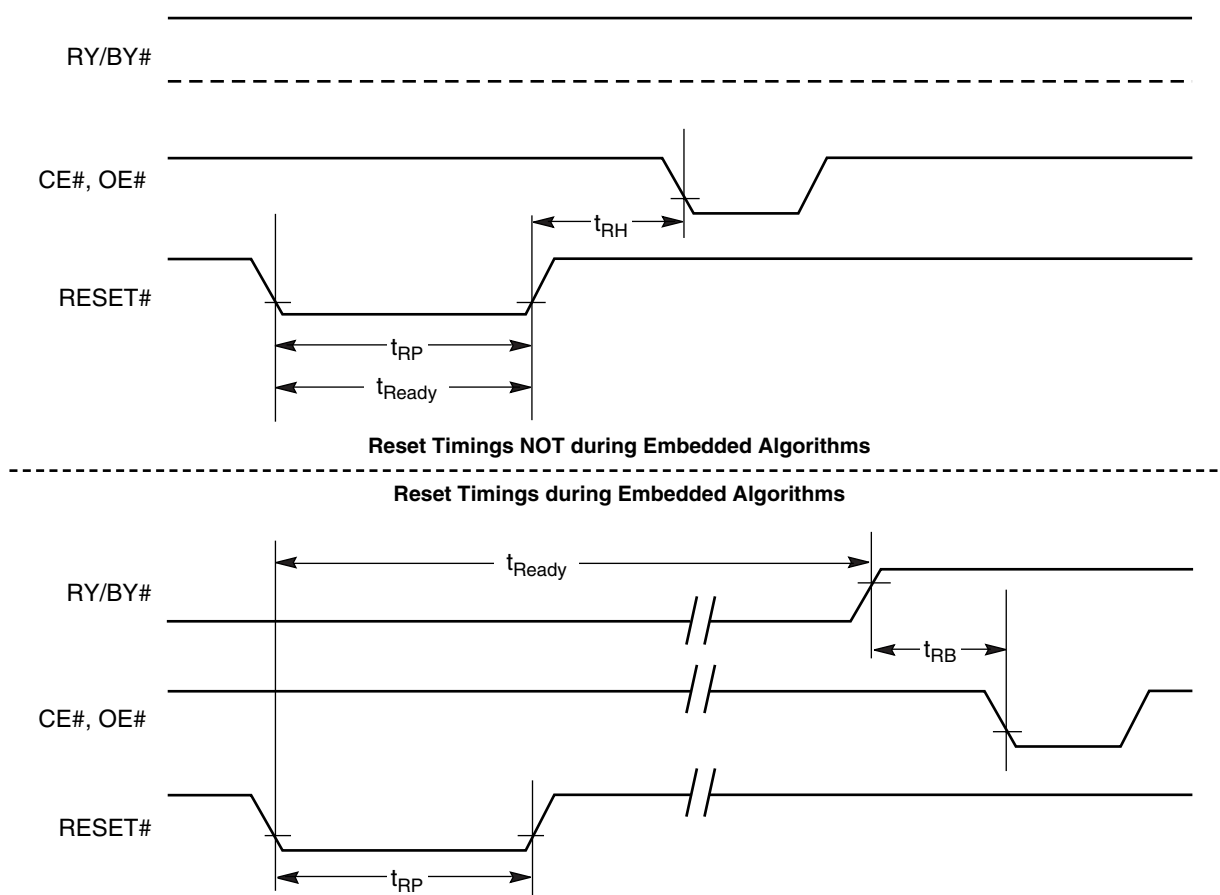


Figure 14. RESET# Timings

## AC CHARACTERISTICS

## Erase/Program Operations


| Parameter   |             | Description                                           |     | Speed Option |     |      | Unit    |
|-------------|-------------|-------------------------------------------------------|-----|--------------|-----|------|---------|
| JEDEC       | Std         |                                                       |     | -70R         | -90 | -120 |         |
| $t_{AVAV}$  | $t_{WC}$    | Write Cycle Time (Note 1)                             | Min | 70           | 90  | 120  | ns      |
| $t_{AVWL}$  | $t_{AS}$    | Address Setup Time                                    | Min | 0            |     |      | ns      |
| $t_{WLAX}$  | $t_{AH}$    | Address Hold Time                                     | Min | 45           | 45  | 50   | ns      |
| $t_{DVWH}$  | $t_{DS}$    | Data Setup Time                                       | Min | 35           | 45  | 50   | ns      |
| $t_{WHDX}$  | $t_{DH}$    | Data Hold Time                                        | Min | 0            |     |      | ns      |
|             | $t_{OES}$   | Output Enable Setup Time                              | Min | 0            |     |      | ns      |
| $t_{GHWL}$  | $t_{GHWL}$  | Read Recovery Time Before Write (OE# High to WE# Low) | Min | 0            |     |      | ns      |
| $t_{ELWL}$  | $t_{CS}$    | CE# Setup Time                                        | Min | 0            |     |      | ns      |
| $t_{WHEH}$  | $t_{CH}$    | CE# Hold Time                                         | Min | 0            |     |      | ns      |
| $t_{WLWH}$  | $t_{WP}$    | Write Pulse Width                                     | Min | 35           | 35  | 50   | ns      |
| $t_{WHWL}$  | $t_{WPH}$   | Write Pulse Width High                                | Min | 30           |     |      | ns      |
| $t_{WHWH1}$ | $t_{WHWH1}$ | Programming Operation (Note 2)                        | Typ | 9            |     |      | $\mu$ s |
| $t_{WHWH2}$ | $t_{WHWH2}$ | Sector Erase Operation (Note 2)                       | Typ | 0.7          |     |      | sec     |
|             | $t_{VCS}$   | $V_{CC}$ Setup Time (Note 1)                          | Min | 50           |     |      | $\mu$ s |
|             | $t_{RB}$    | Recovery Time from RY/BY#                             | Min | 0            |     |      | ns      |
|             | $t_{BUSY}$  | Program/Erase Valid to RY/BY# Delay                   | Max | 90           |     |      | ns      |

**Notes:**

1. Not 100% tested.
2. See the "Erase and Programming Performance" section for more information.




## AC CHARACTERISTICS

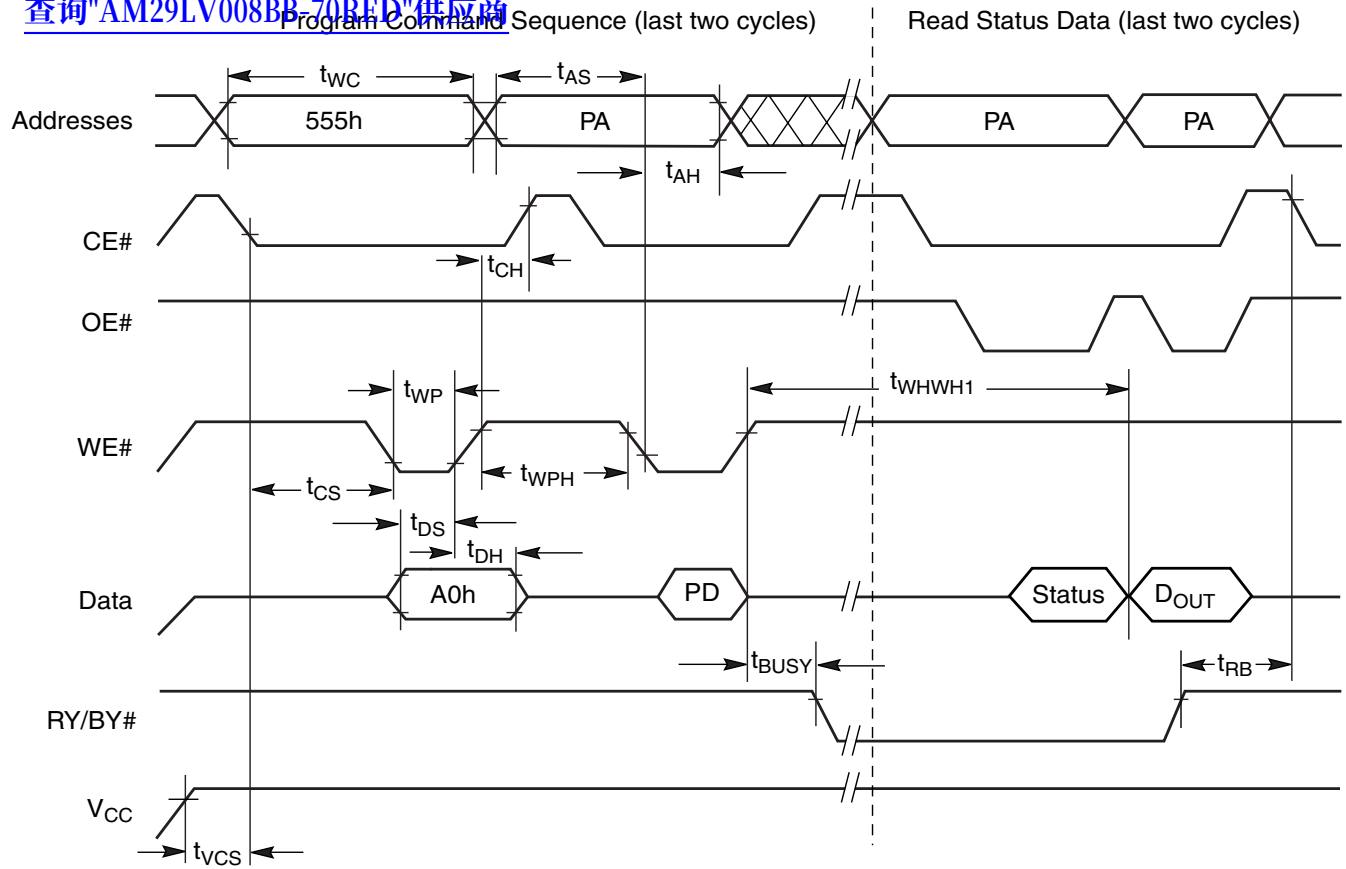[查询"AM29LV008BB-70RED"供应商](#)

**Note:** PA = program address, PD = program data, D<sub>OUT</sub> is the true data at the program address.

**Figure 15. Program Operation Timings**

## AC CHARACTERISTICS

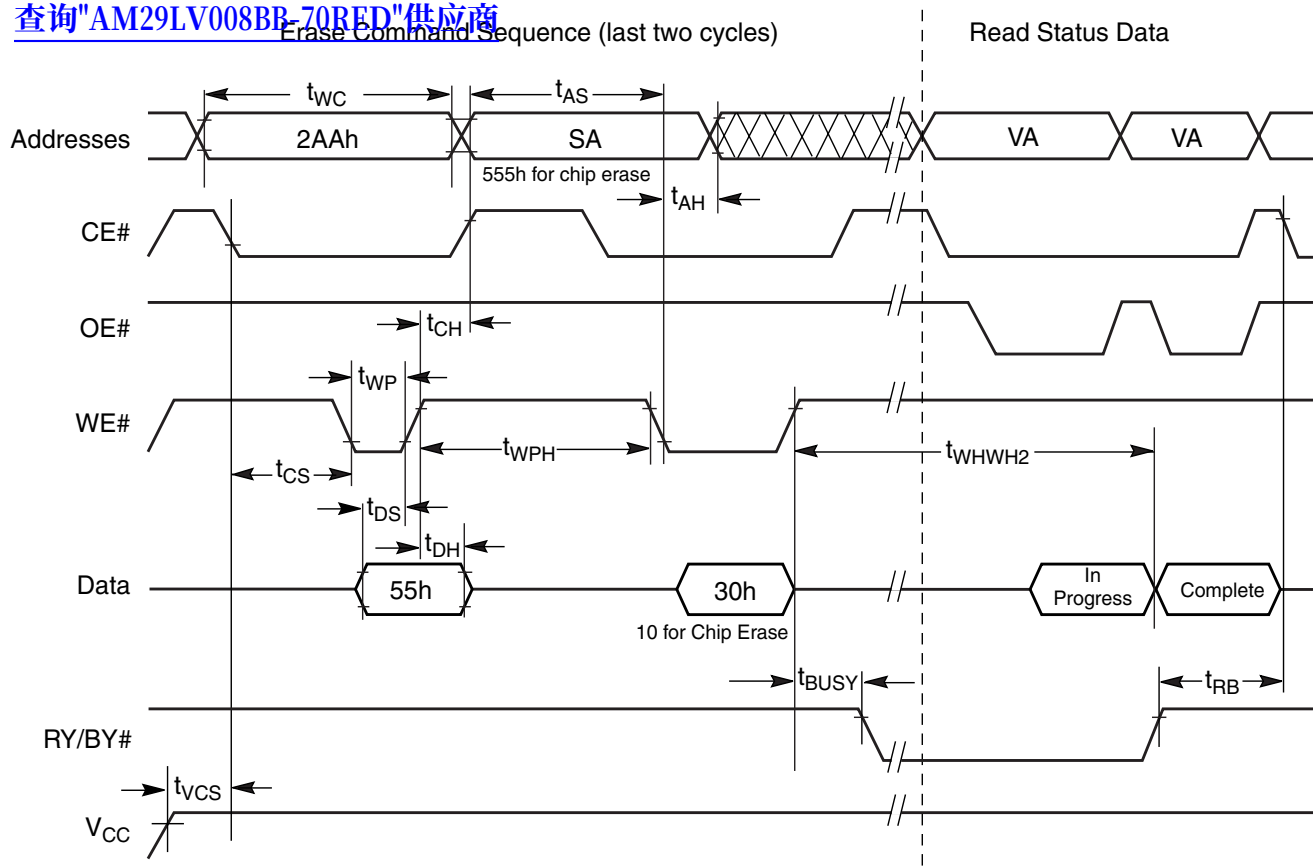
[查询"AM29LV008BB-70RED"供应商](#)


**Note:** SA = sector address (for Sector Erase), VA = Valid Address for reading status data (see "Write Operation Status").

**Figure 16. Chip/Sector Erase Operation Timings**


## AC CHARACTERISTICS

[查询"AM29LV008BB-70RED"供应商](#)

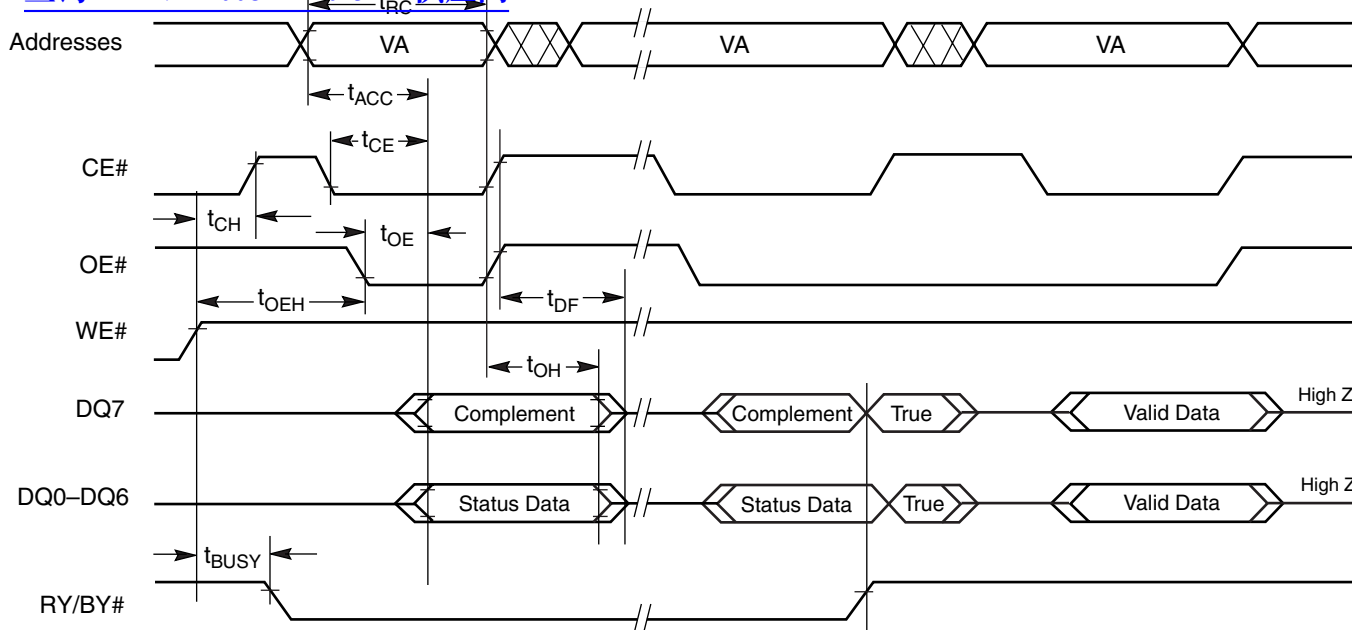

**Note:** VA = Valid address. Illustration shows first status cycle after command sequence, last status read cycle, and array data read cycle.

**Figure 17. Data# Polling Timings (During Embedded Algorithms)**

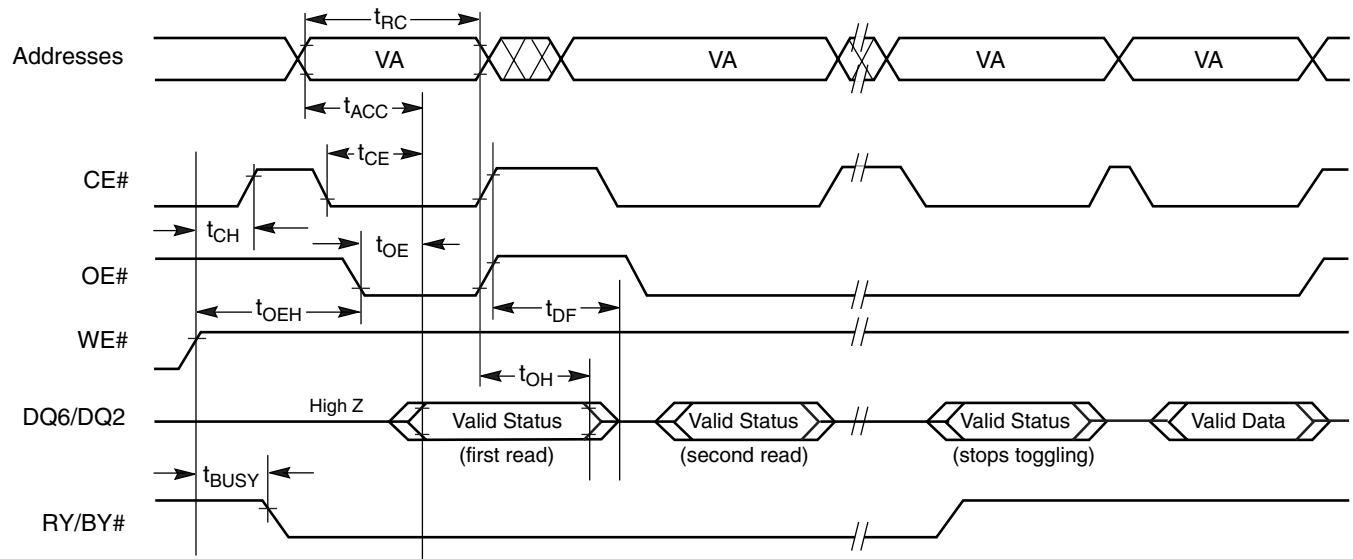


**Note:** VA = Valid address; not required for DQ6. Illustration shows first two status cycle after command sequence, last status read cycle, and array data read cycle.

**Figure 18. Toggle Bit Timings (During Embedded Algorithms)**

AC CHARACTERISTICS

[查询"AM29LV008BB-70RED"供应商](#)

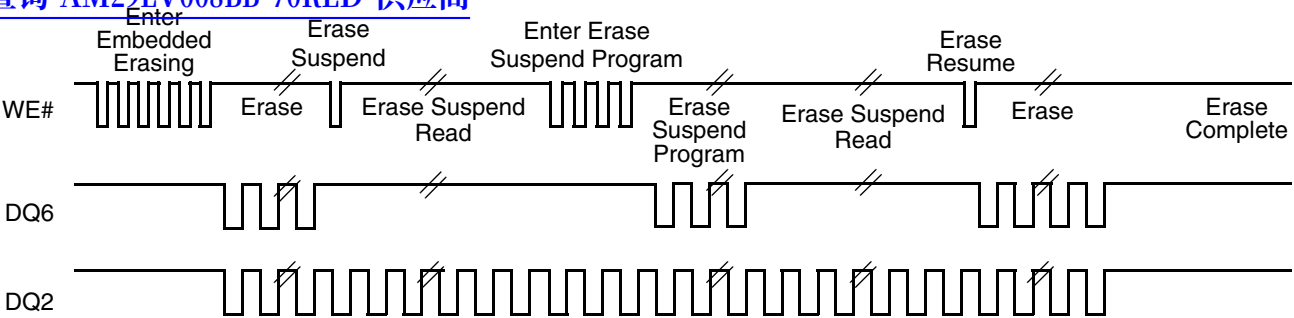

**Note:** The system may use CE# or OE# to toggle DQ2 and DQ6. DQ2 toggles only when read at an address within an erase-suspended sector.

Figure 19. DQ2 vs. DQ6

Temporary Sector Unprotect

| Parameter |            | Description                                      |     | All Speed Options | Unit    |
|-----------|------------|--------------------------------------------------|-----|-------------------|---------|
| JEDEC     | Std        |                                                  |     |                   |         |
|           | $t_{VIDR}$ | $V_{ID}$ Rise and Fall Time (See Note)           | Min | 500               | ns      |
|           | $t_{RSP}$  | RESET# Setup Time for Temporary Sector Unprotect | Min | 4                 | $\mu$ s |

**Note:** Not 100% tested.

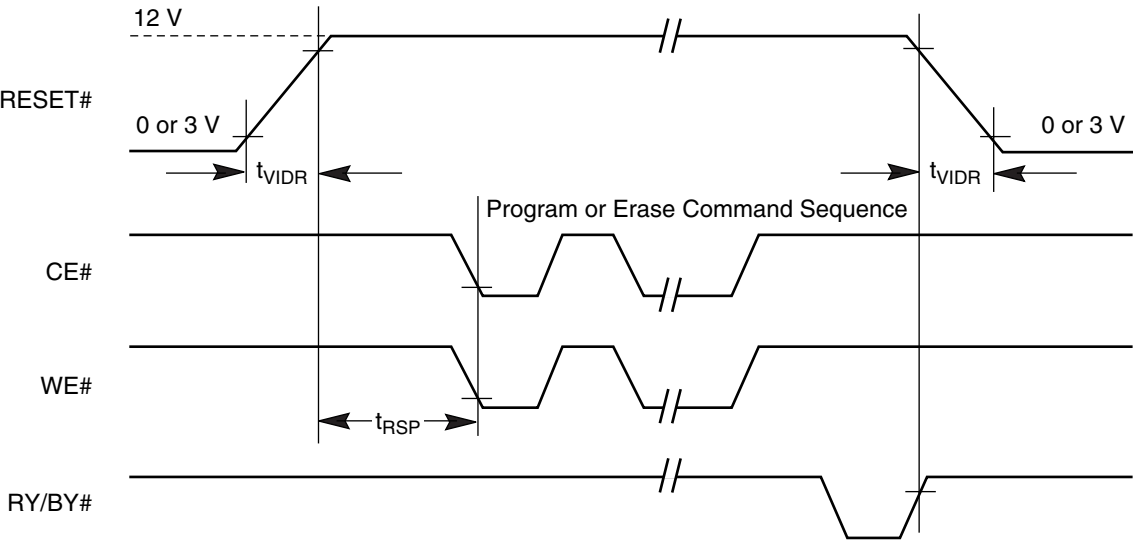
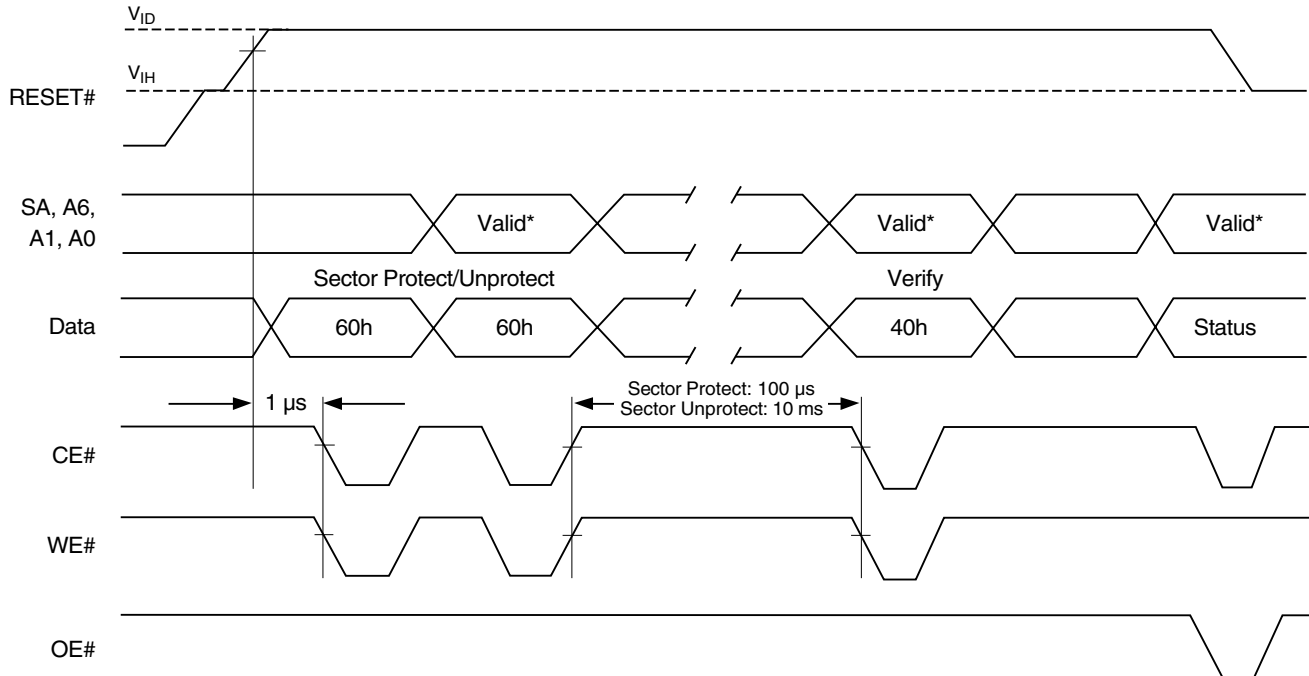


Figure 20. Temporary Sector Unprotect Timing Diagram

## AC CHARACTERISTICS

[查询"AM29LV008BB-70RED"供应商](#)

\* For sector protect,  $A6 = 0$ ,  $A1 = 1$ ,  $A0 = 0$ . For sector unprotect,  $A6 = 1$ ,  $A1 = 1$ ,  $A0 = 0$ .

**Figure 21. Sector Protect/Unprotect Timing Diagram**

## AC CHARACTERISTICS

## Alternate CE# Controlled Erase/Program Operations


| Parameter   |             | Description                                           |     | Speed Option |     |      | Unit    |
|-------------|-------------|-------------------------------------------------------|-----|--------------|-----|------|---------|
| JEDEC       | Std         |                                                       |     | -70R         | -90 | -120 |         |
| $t_{AVAV}$  | $t_{WC}$    | Write Cycle Time (Note 1)                             | Min | 70           | 90  | 120  | ns      |
| $t_{AVEL}$  | $t_{AS}$    | Address Setup Time                                    | Min | 0            |     |      | ns      |
| $t_{ELAX}$  | $t_{AH}$    | Address Hold Time                                     | Min | 45           | 45  | 50   | ns      |
| $t_{DVEH}$  | $t_{DS}$    | Data Setup Time                                       | Min | 35           | 45  | 50   | ns      |
| $t_{EHDX}$  | $t_{DH}$    | Data Hold Time                                        | Min | 0            |     |      | ns      |
|             | $t_{OES}$   | Output Enable Setup Time                              | Min | 0            |     |      | ns      |
| $t_{GHEL}$  | $t_{GHEL}$  | Read Recovery Time Before Write (OE# High to WE# Low) | Min | 0            |     |      | ns      |
| $t_{WLEL}$  | $t_{WS}$    | WE# Setup Time                                        | Min | 0            |     |      | ns      |
| $t_{EHWH}$  | $t_{WH}$    | WE# Hold Time                                         | Min | 0            |     |      | ns      |
| $t_{ELEH}$  | $t_{CP}$    | CE# Pulse Width                                       | Min | 35           | 35  | 50   | ns      |
| $t_{EHEL}$  | $t_{CPH}$   | CE# Pulse Width High                                  | Min | 30           |     |      | ns      |
| $t_{WHWH1}$ | $t_{WHWH1}$ | Programming Operation (Note 2)                        | Typ | 9            |     |      | $\mu$ s |
| $t_{WHWH2}$ | $t_{WHWH2}$ | Sector Erase Operation (Note 2)                       | Typ | 0.7          |     |      | sec     |

**Notes:**

1. Not 100% tested.
2. See the "Erase and Programming Performance" section for more information.

## AC CHARACTERISTICS

[查询"AM29LV008BB-70RED"供应商](#)

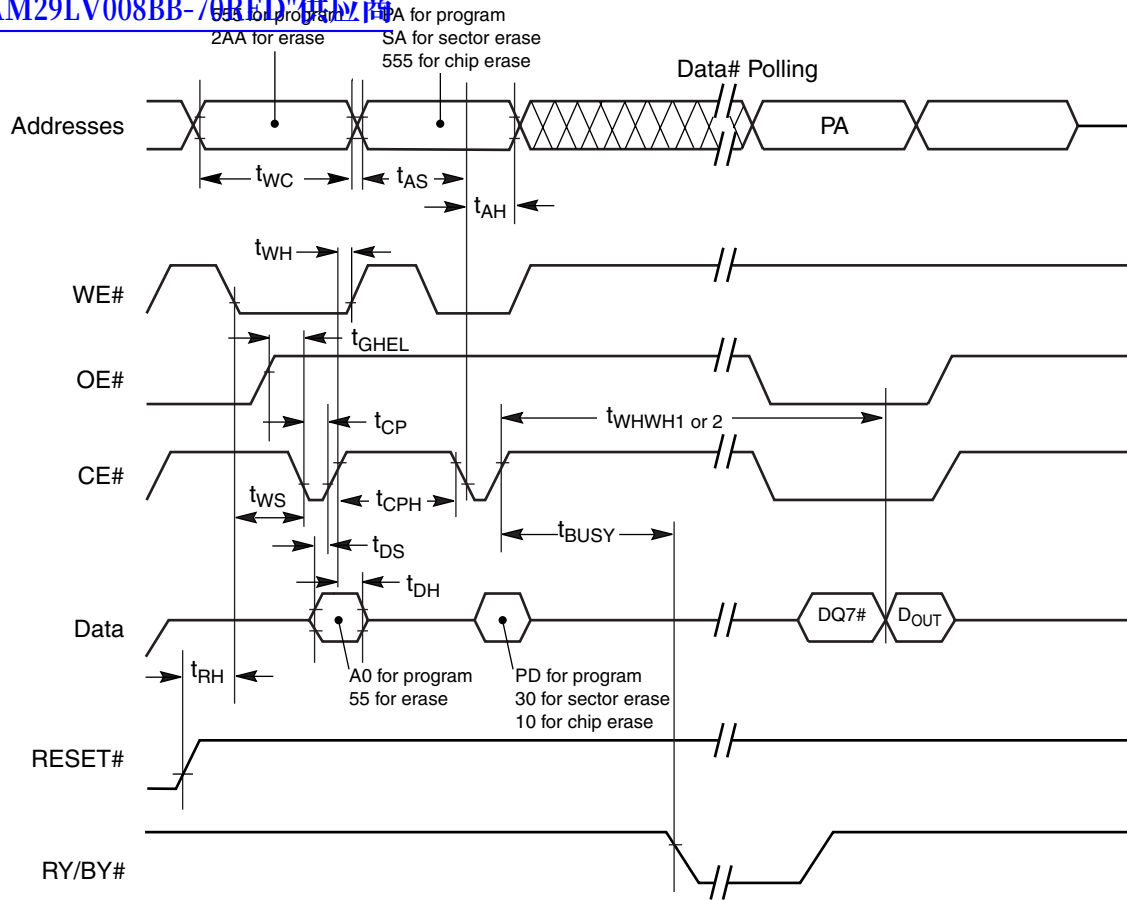**Notes:**

1. PA = Program Address, PD = Program Data, DQ7# = complement of the data written to the device,  $D_{OUT}$  is the data written to the device.
2. Figure indicates the last two bus cycles of the command sequence.

**Figure 22. Alternate CE# Controlled Write Operation Timings**

## ERASE AND PROGRAMMING PERFORMANCE

查询"AM29LV008BB-70RED"供应商

| Parameter                      | Typ (Note 1) | Max (Note 2) | Unit    | Comments                                           |
|--------------------------------|--------------|--------------|---------|----------------------------------------------------|
| Sector Erase Time              | 0.7          | 15           | s       | Excludes 00h programming prior to erasure (Note 4) |
| Chip Erase Time                | 14           |              | s       |                                                    |
| Byte Programming Time          | 9            | 300          | $\mu$ s | Excludes system level overhead (Note 5)            |
| Chip Programming Time (Note 3) | 9            | 27           | s       |                                                    |

**Notes:**

1. Typical program and erase times assume the following conditions: 25°C, 3.0 V  $V_{CC}$ , 1,000,000 cycles. Additionally, programming typicals assume checkerboard pattern.
2. Under worst case conditions of 90°C,  $V_{CC} = 2.7$  V, 1,000,000 cycles.
3. The typical chip programming time is considerably less than the maximum chip programming time listed, since most bytes program faster than the maximum program times listed.
4. In the pre-programming step of the Embedded Erase algorithm, all bytes are programmed to 00h before erasure.
5. System-level overhead is the time required to execute the four-bus-cycle sequence for the program command. See Table 5 for further information on command definitions.
6. The device has a minimum erase and program cycle endurance of 1,000,000 cycles.

## LATCHUP CHARACTERISTICS

| Description                                                                                        | Min     | Max              |
|----------------------------------------------------------------------------------------------------|---------|------------------|
| Input voltage with respect to $V_{SS}$ on all pins except I/O pins (including A9, OE#, and RESET#) | -1.0 V  | 12.5 V           |
| Input voltage with respect to $V_{SS}$ on all I/O pins                                             | -1.0 V  | $V_{CC} + 1.0$ V |
| $V_{CC}$ Current                                                                                   | -100 mA | +100 mA          |

Includes all pins except  $V_{CC}$ . Test conditions:  $V_{CC} = 3.0$  V, one pin at a time.

## TSOP PIN CAPACITANCE

| Parameter Symbol | Parameter Description   | Test Setup    | Typ | Max | Unit |
|------------------|-------------------------|---------------|-----|-----|------|
| $C_{IN}$         | Input Capacitance       | $V_{IN} = 0$  | 6   | 7.5 | pF   |
| $C_{OUT}$        | Output Capacitance      | $V_{OUT} = 0$ | 8.5 | 12  | pF   |
| $C_{IN2}$        | Control Pin Capacitance | $V_{IN} = 0$  | 7.5 | 9   | pF   |

**Notes:**

1. Sampled, not 100% tested.
2. Test conditions  $T_A = 25^\circ\text{C}$ ,  $f = 1.0$  MHz.

## DATA RETENTION

| Parameter                           | Test Conditions | Min | Unit  |
|-------------------------------------|-----------------|-----|-------|
| Minimum Pattern Data Retention Time | 150°C           | 10  | Years |
|                                     | 125°C           | 20  | Years |



TS-040—40-Pin Standard TSOP



NOTES:

1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (mm).  
(DIMENSIONING AND TOLERANCING CONFORMS TO ANSI Y14.5M-1982)
2. PIN 1 IDENTIFIER FOR STANDARD PIN OUT (DIE UP).
3. PIN 1 IDENTIFIER FOR REVERSE PIN OUT (DIE DOWN): INK OR LASER MARK.
4. TO BE DETERMINED AT THE SEATING PLANE . THE SEATING PLANE IS DEFINED AS THE PLANE OF CONTACT THAT IS MADE WHEN THE PACKAGE LEADS ARE ALLOWED TO REST FREELY ON A FLAT HORIZONTAL SURFACE.
5. DIMENSIONS D1 AND E DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION IS 0.15mm (0.0059") PER SIDE.
6. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08mm (0.0031") TOTAL IN EXCESS OF b DIMENSION AT MAX. MATERIAL CONDITION. MINIMUM SPACE BETWEEN PROTRUSION AND AN ADJACENT LEAD TO BE 0.07mm (0.0028").
7. THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.10mm (0.0039") AND 0.25mm (0.0098") FROM THE LEAD TIP.
8. LEAD COPLANARITY SHALL BE WITHIN 0.10mm (0.004") AS MEASURED FROM THE SEATING PLANE.
9. DIMENSION "e" IS MEASURED AT THE CENTERLINE OF THE LEADS.

39

**REVISION SUMMARY**

[查询"AM29LV008BB-70RED"供应商](#)  
**Revision A (October 1997)**

First release.

**Revision B (January 1998)****Distinctive Characteristics**

Changed typical read and program/erase current specifications.

Device now has a guaranteed minimum endurance of 1,000,000 write cycles.

**Figure of In-System Sector Protect/Unprotect Algorithm**

Corrected A6 to 0, Changed wait specification to 150  $\mu$ s on sector protect and 15 ms on sector unprotect.

**DC Characteristics**

Changed typical read and program/erase current specifications.

**AC Characteristics**

*Alternate CE# Controlled Erase/Program Operations:* Changed  $t_{CP}$  to 35 ns for 70R, 80, and 90 speed options.

**Erase and Programming Performance**

Device now has a guaranteed minimum endurance of 1,000,000 write cycles.

**Revision B+1 (March 1998)****Figure of In-System Sector Protect/Unprotect Algorithms**

In the sector protect algorithm, added a "Reset PLSCNT=1" box in the path from "Protect another sector?" back to setting up the next sector address.

**DC Characteristics**

Changed Note 1 to indicate that OE# is at  $V_{IH}$  for the listed current.

**AC Characteristics**

*Erase/Program Operations; Alternate CE# Controlled Erase/Program Operations:* Corrected the notes reference for  $t_{WHWH1}$  and  $t_{WHWH2}$ . These parameters are 100% tested. Corrected the note reference for  $t_{VCS}$ . This parameter is not 100% tested.

**Temporary Sector Unprotect Table**

Added note reference for  $t_{VIDR}$ . This parameter is not 100% tested.

**Figure 21, Sector Protect/Unprotect Timing Diagram**

A valid address is not required for the first write cycle; only the data 60h.

**Erase and Programming Performance**

In Note 2, the worst case endurance is now 1 million cycles.

**Revision C (January 1999)****Global**

Updated for CS39S process technology.

**Distinctive Characteristics**

Added:

- 20-year data retention at 125°C
  - Reliable operation for the life of the system

**DC Characteristics—CMOS Compatible**

$I_{CC1}$ ,  $I_{CC2}$ ,  $I_{CC3}$ ,  $I_{CC4}$ ,  $I_{CC5}$ : Added Note 2 "Maximum  $I_{CC}$  specifications are tested with  $V_{CC} = V_{CCmax}$ ".

$I_{CC3}$ ,  $I_{CC4}$ : Deleted  $V_{CC} = V_{CCmax}$ .

**Revision D (November 19, 1999)****AC Characteristics—Figure 15. Program Operations Timing and Figure 16. Chip/Sector Erase Operations**

Deleted  $t_{GHWL}$  and changed OE# waveform to start at high.

**Physical Dimensions**

Replaced figures with more detailed illustrations.

**Revision D+1 (August 14, 2000)****Global**

Deleted 80 ns speed option.

**Ordering Information**

Deleted burn-in option.

**Revision D+2 (November 10, 2000)****Command Definitions**

*Reset Command:* Deleted reference to Figure 14, RESET# Timings, which is only applicable to the hardware reset function.

**Revision D+3 (June 11, 2004)****Ordering Information**

Added Pb-Free OPNs.

**Revision D4 (February 21, 2006)****Global**

Removed Reverse TSOP option.

**Revision D5 (September 12, 2006)****Erase and Program Operations table**

Changed  $t_{BUSY}$  to a maximum specification.

**Revision D6 (October 11, 2006)****查询"AM29LV008BB-70RED"供应商**

Added notice on product availability.

**Colophon**

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for any use that includes fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for any use where chance of failure is intolerable (i.e., submersible repeater and artificial satellite). Please note that Spansion Inc. will not be liable to you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products. Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions. If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the US Export Administration Regulations or the applicable laws of any other country, the prior authorization by the respective government entity will be required for export of those products.

**Trademarks**

Copyright © 1997–2005 Advanced Micro Devices, Inc. All rights reserved. AMD, the AMD logo, and combinations thereof are registered trademarks of Advanced Micro Devices, Inc. ExpressFlash is a trademark of Advanced Micro Devices, Inc. Product names used in this publication are for identification purposes only and may be trademarks of their respective companies.

Copyright © 2006 Spansion Inc. All Rights Reserved. Spansion, the Spansion logo, MirrorBit, ORNAND, HD-SIM, and combinations thereof are trademarks of Spansion Inc. Other names are for informational purposes only and may be trademarks of their respective owners.