


Industry Smallest and Low Profile 12W 2A DC/DC Boost Converter with High Output Power Density

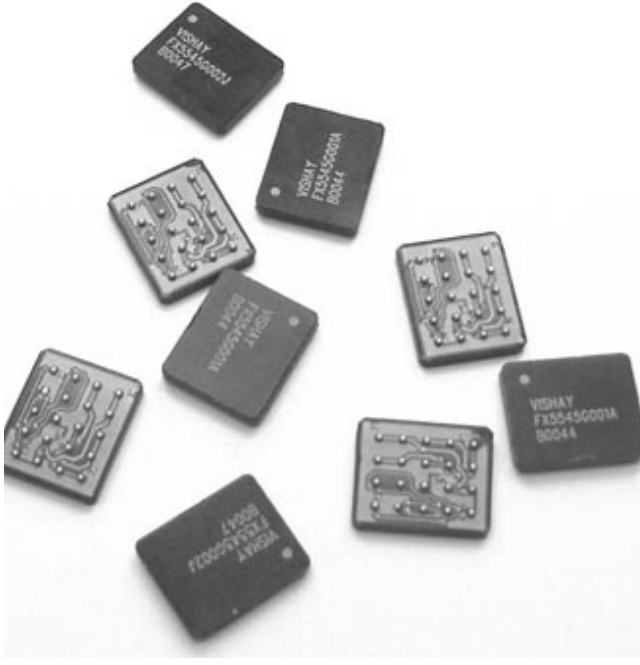

FEATURES

- Fully integrated DC/DC converter
- High efficiency over large load range
- 100% duty cycle
- Power density - more than 440W/inch³
- 1μA shutdown current
- 2.5V to 6V input range (1Li+ and 3-cell NiCd or NiMH cells)
- 3.3V to 6V output voltage
- Programmable PWM/ $\overline{\text{PSM}}$ controls
- Low output ripple
- BGA construction
- Temperature range: - 40°C to + 85°C
- No external components needed
- Output power 12W
- Maximum current 2A
- Low profile

The DC/DC converter is a programmable topology synchronized Boost converter for today's continuous changing portable electronic market. The DC/DC converter provides flexibility of utilizing various battery configurations and chemistries such as NiCd, NiMH, or Li+ with an input voltage range of 2.5V to 6V. An additional flexibility is provided with topology programmability to power multiple loads such as power amplifiers, microcontrollers, or base band logic IC's. For ultra-high efficiency, converters are designed to operate in synchronous rectified PWM mode under full load while transforming into externally controlled pulse-skipping mode (PSM) under light load.

The DC/DC converter is available in 20-ports BGA package. In order to satisfy the stringent ambient temperature requirements, the DC/DC converter is designed to handle the industrial temperature range of - 40°C to + 85°C.


APPLICATION

- Point of Load (POL) applications such as drivers for FPGA's, microprocessors, DSP's amplifiers, etc.
- Cordless phones, PDAs and others
- Supply voltage source for low-voltage chip sets
- Portable computers
- Battery back-up supplies
- Cameras


ORDERING INFORMATION

	FX	5545	G106	□	□	□	□	□
FUNCTION								
SIZE								
CIRCUIT IDENTIFIER								
OUTPUT VOLTAGE - Example: 2.7V should be written as 2V7 as the V indicates the decimal point, or ADJ for adjustable version - self selectable output voltage.								
PACKAGING - B1 = 10pcs in bulk; B5 = 50pcs in bulk; T1 = 13" reel; T2 = 7" reel.								
For lead (Pb)-free solder please add E2 suffix.								

DIMENSIONS in inches [millimeters]	
L	0.58 ± 0.01 [14.7 ± 0.25]
W	0.48 ± 0.01 [12.2 ± 0.25]
A	0.1 ± 0.01 [2.54 ± 0.25]
B	0.09 ± 0.01 [2.29 ± 0.25]
C	0.09 ± 0.01 [2.27 ± 0.25]
T	0.126 max [3.2 max]
Ball Diameter	0.03 ± 0.001 [0.762 ± 0.025]

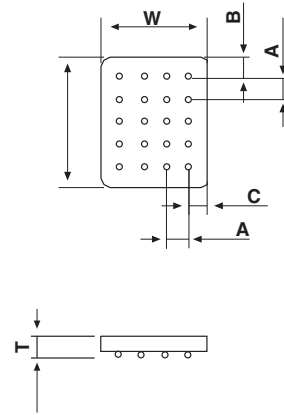

BOTTOM SIDE

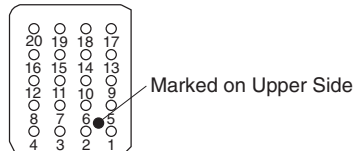


*Note: Pin Description application note is available at www.vishay.com/doc?10119

**Note: if not used must be connected to Vin.

PIN CONFIGURATION*	
PIN	CONNECTION
1, 2	\overline{SD}
3, 7	SYNC**
4, 8	N/C
5, 9	Vin
6, 10	PWM/PSM
11, 12	N/C
13, 17	GND
14, 18	Vout
15, 19	N/C
16, 20	GND

RECOMMENDED PAD PATTERN in inches [millimeters]		
A	D	F
0.1 ± 0.01 [2.54 ± 0.25]	0.03 ± 0.001 [0.8 ± 0.02]	0.02 ± 0.001 [0.5 ± 0.02]




TAPE AND REEL

See Tape and Reel Information - Type B

STANDARD ELECTRICAL SPECIFICATIONS					
PARAMETER	UNIT	CONDITION	MIN	TYP	MAX
Input					
Voltage Range	V _{DC}		2.5		6
Quiescent Current	μA	PSM mode		200	
Soft Start Time	ms	T _{SS} for Vout = 6.0V		22	
		T _{SS} for Vout = 5.0V		22	
		T _{SS} for Vout = 3.3V		19	
SD, PWM/PSM, SYNC					
Logic High	V	V _H	2.4		
Logic Low	V	V _L			0.8
Normal Mode	μA	I _{DD}			750
PSM Mode	μA	I _{DD}			250
Shutdown Mode	μA	I _{DD}			1
Shutdown Time	ms	T _{SS} for Vout = 6.0V		15	
		T _{SS} for Vout = 5.0V		14	
		T _{SS} for Vout = 3.3V		14	
Insulation					
Test Voltage	V _{AC}	60Hz 60sec	750		
Resistance	Ω	V _{ISO} = 500 V _{DC}	1 x 10 ¹¹		
Leakage Current	nA	V _{ISO} = 500 V _{DC}			5
Output					
Power	W			12	
Voltage	V _{DC}			3.3 to 6	
Voltage Tolerance	%	at 25 °C Ambient Temperature	- 3		3
Temp. Coefficient	%/°C				0.03
Ripple and Noise	mVpp	DC to 20 MHz		65	
General					
Package Weight	gr.				1.5
Oscillator					
Frequency	KHz			670	
SYNC Range	KHz	F _{SYNC} /F _{OSC}	1.2		1.5
Temperature					
Operation	°C		- 40		+ 85
Storage	°C		- 55		+ 125
Operating Junction Temp.	°C	T _J		150	
Thermal Impedance	°C/W _D *	θ _{JA}		82	


*Note: W_D = Power Dissipated

Rise Time

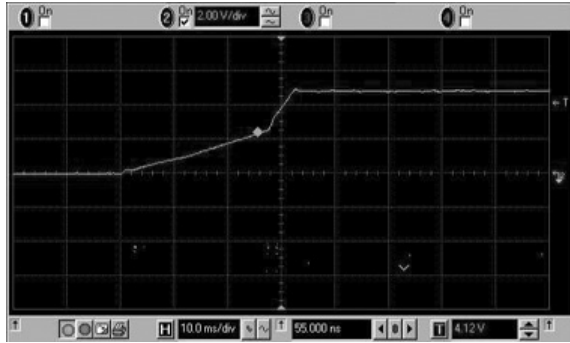


Rise Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 2A


Fall Time

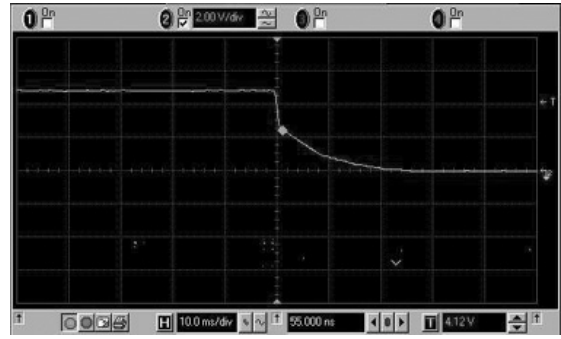


Fall Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 2A

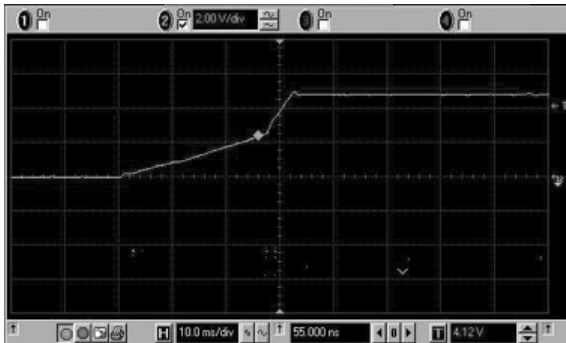


Rise Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 2A

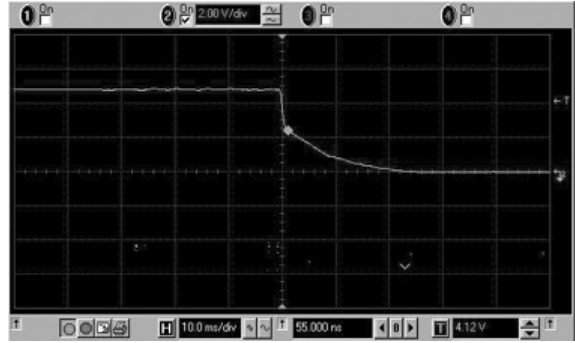


Fall Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 2A

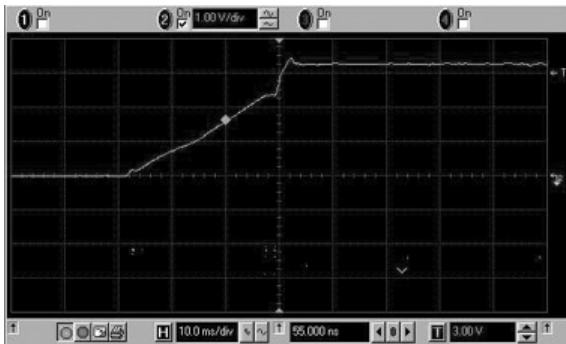


Rise Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 2A

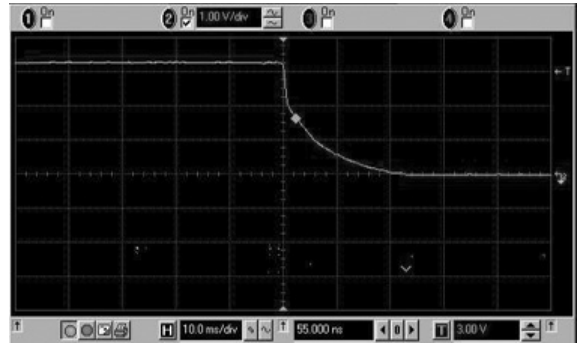

Fall Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 2A

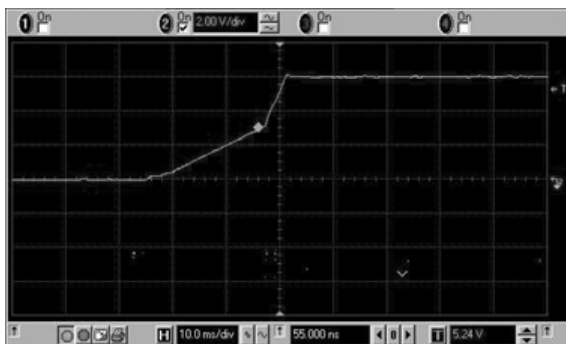


Rise Time (PWM mode): Vin = 5V; Vout = 6V; Iout = 1A

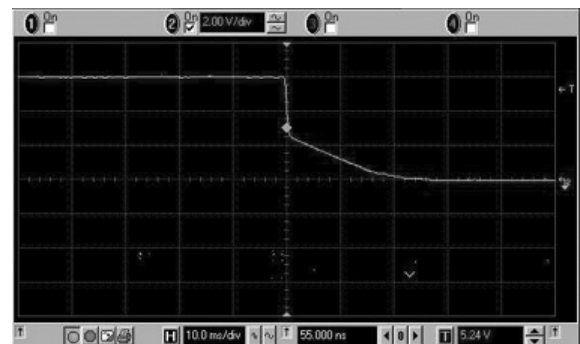


Fall Time (PWM mode): Vin = 5V; Vout = 6V; Iout = 1A

Rise Time

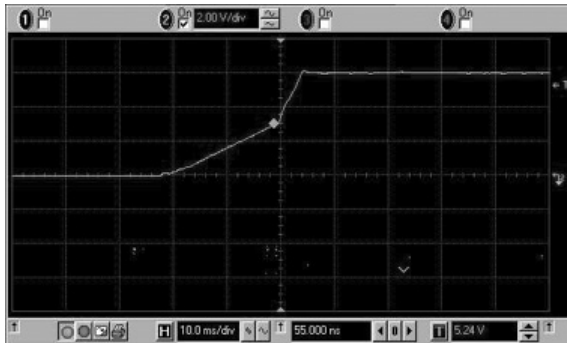


Rise Time (PWM mode): Vin = 4V; Vout = 6V; Iout = 1A


Fall Time

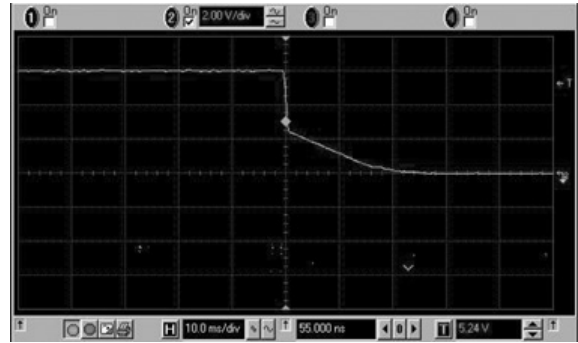


Fall Time (PWM mode): Vin = 4V; Vout = 6V; Iout = 1A

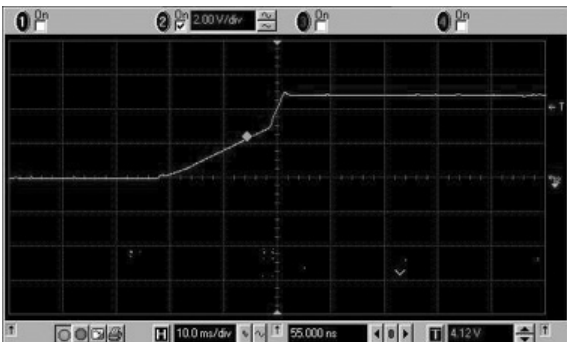


Rise Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 1A

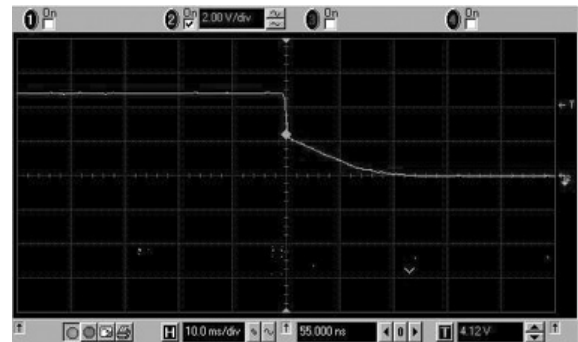


Fall Time (PWM mode): Vin = 4.5V; Vout = 5V; Iout = 1A

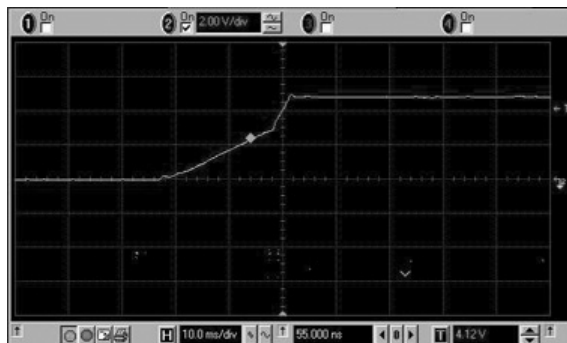


Rise Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 1A

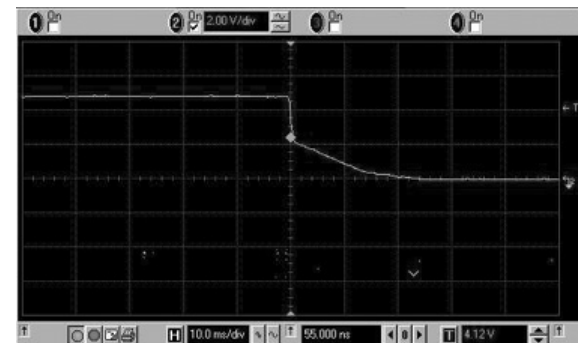

Fall Time (PWM mode): Vin = 3.5V; Vout = 5V; Iout = 1A

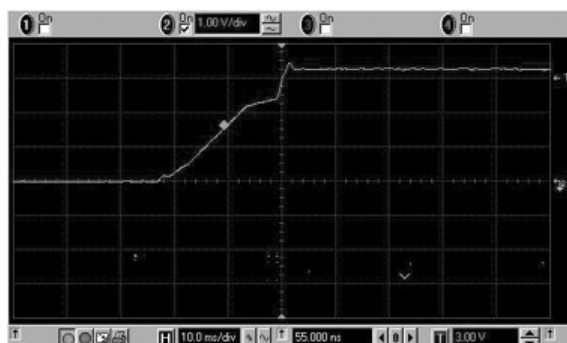


Rise Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 1A

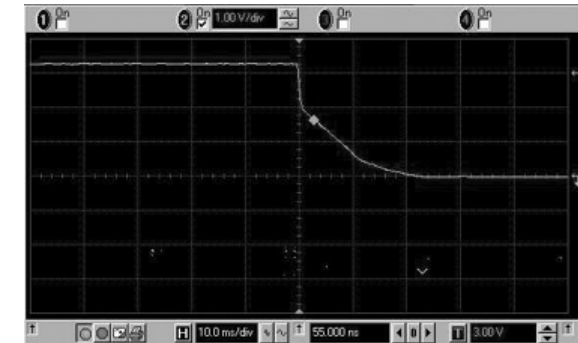


Fall Time (PWM mode): Vin = 3V; Vout = 3.3V; Iout = 1A

PWM MODE 6V


Vout vs. Iout

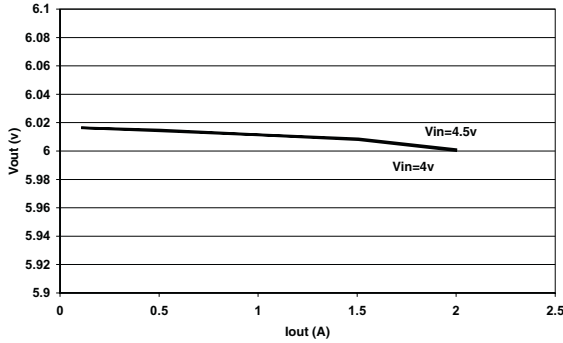


Vout vs. Vin

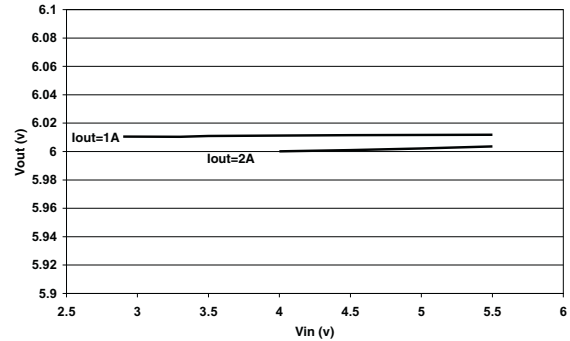

Efficiency vs. Iout

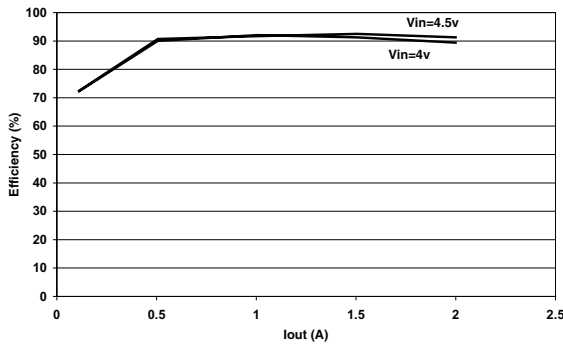


**ΔTemperature vs. Iout
Above 25°C Ambient Temperature**

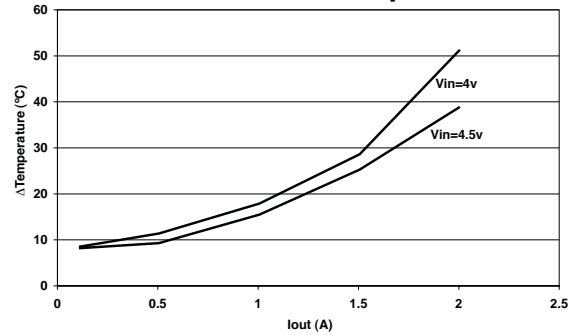


PWM MODE 5V


Vout vs. Iout

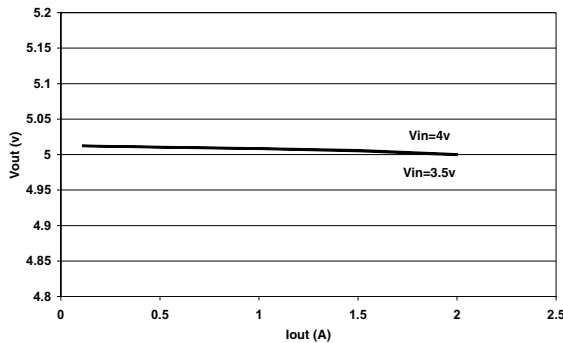


Vout vs. Vin

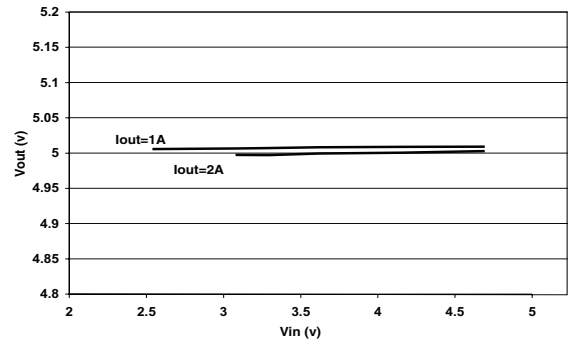

Efficiency vs. Iout

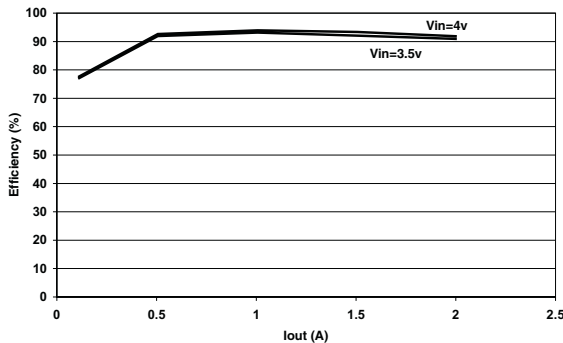


**ΔTemperature vs. Iout
Above 25°C Ambient Temperature**

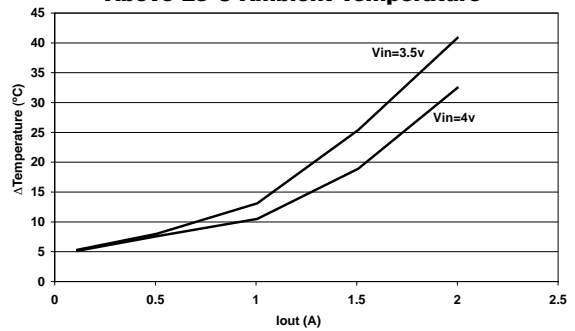


PWM MODE 3.3V


Vout vs. Iout

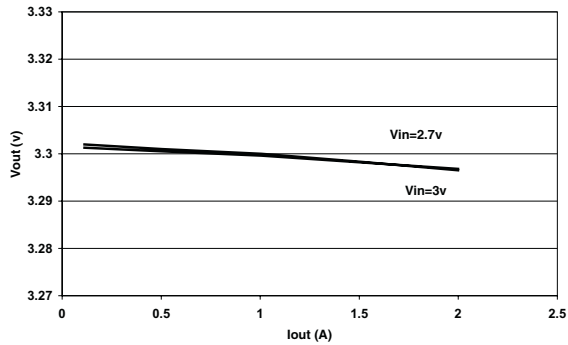


Vout vs. Vin

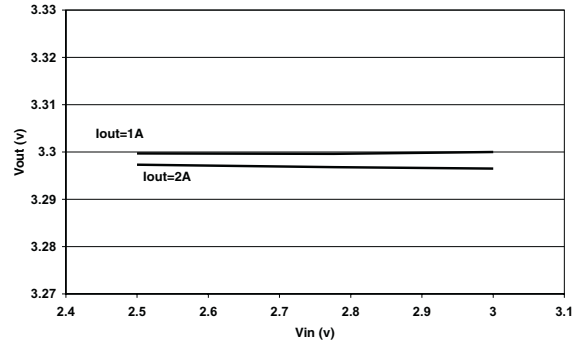

Efficiency vs. Iout

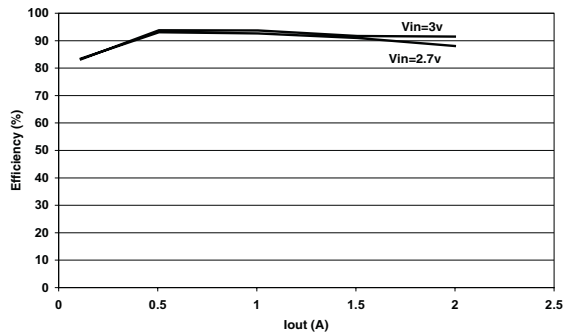


ΔTemperature vs. Iout
Above 25°C Ambient Temperature; Vin=2.5V

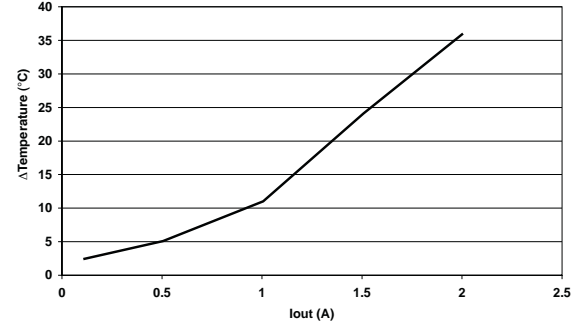


PSM MODE 6V


Vout vs. Iout

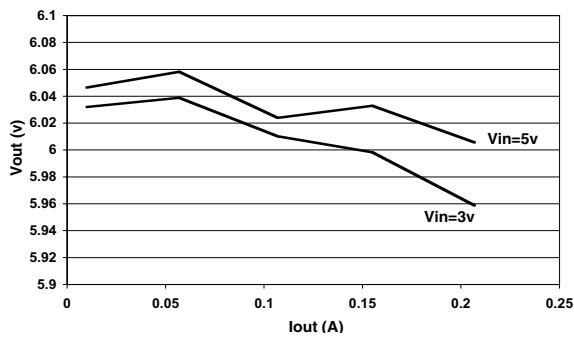

Vout vs. Vin

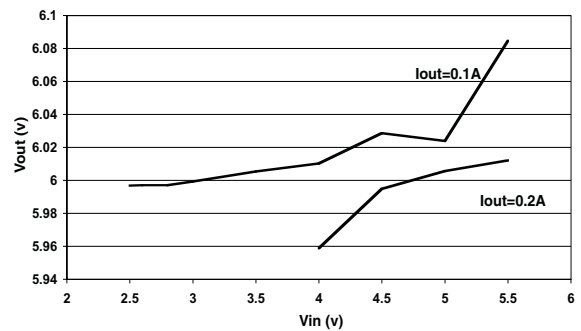


Efficiency vs. Iout

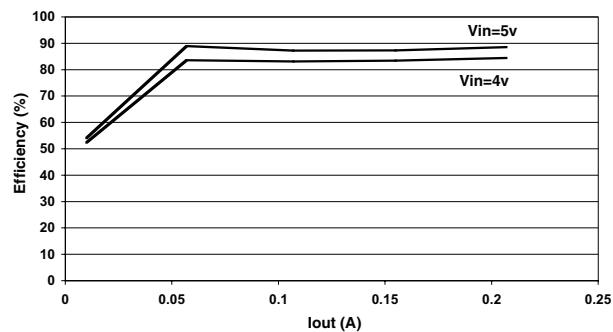


PSM MODE 5V


Vout vs. Iout

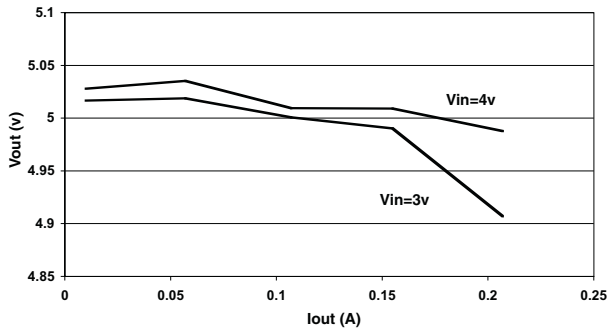

Vout vs. Vin

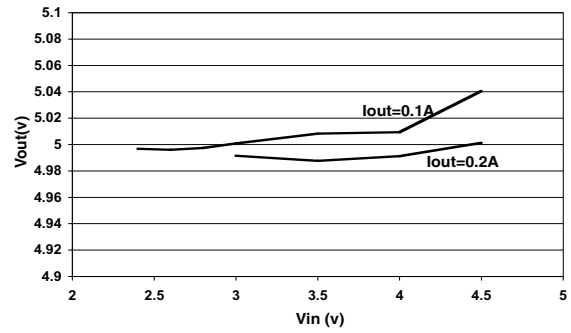


Efficiency vs. Iout

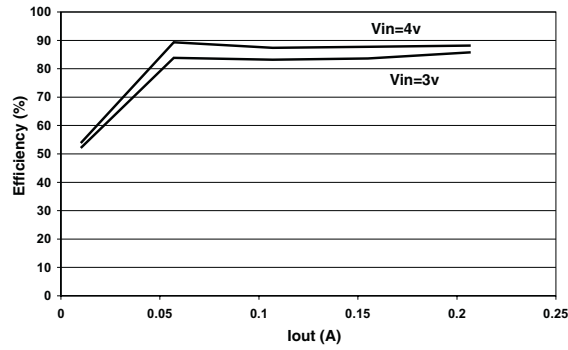

PSM MODE 3.3V

Vout vs. Iout

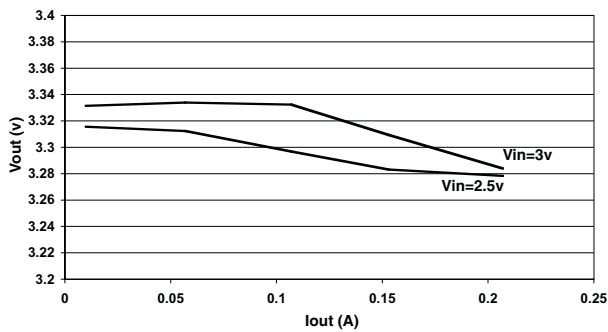

Vout vs. Vin



Efficiency vs. Iout

