

查询"MHW8227"供应商

The RF Line

Gallium Arsenide CATV Amplifier Module

Features

- Specified for 79- and 112-Channel Loading
- Excellent Distortion Performance
- Higher Output Capability
- Built-in Input Diode Protection
- GaAs FET Transistor Technology
- Unconditionally Stable Under All Load Conditions

Applications


- CATV Systems Operating in the 47 to 870 MHz Frequency Range
- Output Stage Amplifier in Optical Nodes, Line Extenders and Trunk Distribution Amplifiers for CATV Systems
- Driver Amplifier in Linear General Purpose Applications

Description

- 24 Vdc Supply, 47 to 870 MHz, CATV GaAs Forward Power Doubler Amplifier Module

MHW8227

**870 MHz
22.1 dB GAIN
112-CHANNEL
GaAs CATV AMPLIFIER MODULE**



CASE 1302-01, STYLE 1

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	V_{in}	+70	dBmV
DC Supply Voltage	V_{CC}	+26	Vdc
Operating Case Temperature Range	T_C	-20 to +100	°C
Storage Temperature Range	T_{stg}	-40 to +100	°C

ESD MAXIMUM RATINGS

Rating	Input Value	Output Value	Unit
Surge Voltage per IEC 1000-4-5	200	200	V
Human Body Model per Mil. Std. 1686	2	2	kV

ELECTRICAL CHARACTERISTICS ($V_{CC} = 24$ Vdc, $T_C = +45^\circ\text{C}$, 75 Ω system unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	47	—	870	MHz
Power Gain 870 MHz	G_p	21.5	22.1	22.7	dB
Slope 47-870 MHz	S	0	0.5	1.0	dB
Gain Flatness (47-870 MHz, Peak-to-Valley)	—	—	—	0.7	dB
Return Loss — Input ($Z_o = 75$ Ohms)	IRL	20 18 16	— — —	— — —	dB
Return Loss — Output ($Z_o = 75$ Ohms)	ORL	20 18 16	— — —	— — —	dB

REV 0

© Motorola, Inc. 2003



MOTOROLA
intelligence everywhere™

digital dna™

**For More Information On This Product,
Go to: www.freescale.com**

ELECTRICAL CHARACTERISTICS – continued (V_{CC} = 24 Vdc, T_C = +45°C, 75 Ω system unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
Composite Second Order (V _{out} = +48 dBmV/ch., Worst Case) (V _{out} = +48 dBmV/ch., Worst Case) (V _{out} = +56 dBmV @ 870 MHz Equiv) (V _{out} = +58 dBmV @ 870 MHz Equiv)	112-Channel FLAT	CSO ₁₁₂	—	–66	–64	dBc
	79-Channel FLAT	CSO ₇₉	—	–70	–68	
	112-Channel, 12 dB Tilt	CSO ₁₁₂	—	–63	–61	
	79-Channel, 12 dB Tilt	CSO ₇₉	—	–69	–67	
Cross Modulation Distortion @ Ch 2 (V _{out} = +48 dBmV/ch., FM = 55.25 MHz) (V _{out} = +48 dBmV/ch., FM = 55.25 MHz) (V _{out} = +56 dBmV @ 870 MHz Equiv) (V _{out} = +58 dBmV @ 870 MHz Equiv)	112-Channel FLAT	XMD ₁₁₂	—	–58	–56	dBc
	79-Channel FLAT	XMD ₇₉	—	–61	–59	
	112-Channel, 12 dB Tilt	XMD ₁₁₂	—	–53	–51	
	79-Channel, 12 dB Tilt	XMD ₇₉	—	–60	–47	
Composite Triple Beat (V _{out} = +48 dBmV/ch., Worst Case) (V _{out} = +48 dBmV/ch., Worst Case) (V _{out} = +56 dBmV @ 870 MHz Equiv) (V _{out} = +58 dBmV @ 870 MHz Equiv)	112-Channel FLAT	CTB ₁₁₂	—	–60	–58	dBc
	79-Channel FLAT	CTB ₇₉	—	–66	–64	
	112-Channel, 12 dB Tilt	CTB ₁₁₂	—	–57	–55	
	79-Channel, 12 dB Tilt	CTB ₇₉	—	–63	–61	
Noise Figure	50 MHz	NF	—	4.5	—	dB
	550 MHz		—	4.5	—	
	750 MHz		—	4.5	—	
	870 MHz		—	4.5	—	
DC Current (V _{DC} = 24 V, T _C = 45°C)		I _{DC}	410	425	440	mA


NOTES

[查询"MHW8227"供应商](#)

Freescal Semiconductor, Inc.

PACKAGE DIMENSIONS

查询"MHW8227"供应商

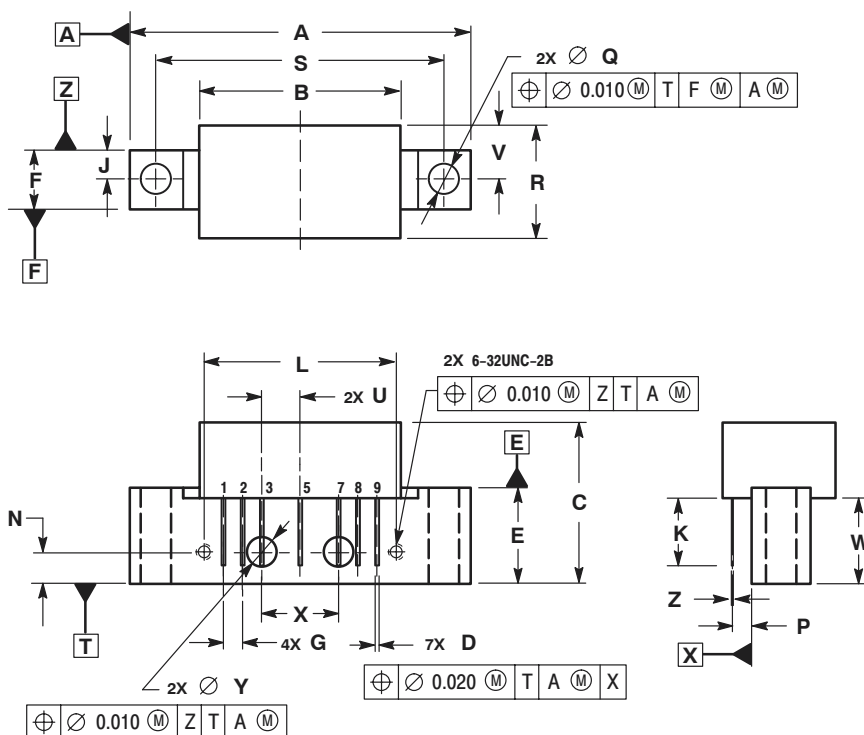

- NOTES:
1. DIMENSIONS ARE IN INCHES.
 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	---	1.775	---	45.085
B	---	1.085	---	27.559
C	---	0.840	---	21.336
D	0.015	0.021	0.381	0.533
E	0.465	0.510	11.811	12.954
F	0.300	0.325	7.62	8.255
G	0.100 BSC		2.540 BSC	
J	0.156 BSC		3.962 BSC	
K	0.315	0.355	8.001	9.017
L	1.000 BSC		25.400 BSC	
N	0.165 BSC		4.191 BSC	
P	0.100 BSC		2.540 BSC	
Q	0.148	0.168	3.759	4.267
R	---	0.600	---	15.24
S	1.500 BSC		38.100 BSC	
U	0.200 BSC		5.080 BSC	
V	---	0.250	---	6.350
W	0.435	---	11.049	---
X	0.400 BSC		10.160 BSC	
Y	0.152	0.163	3.861	4.140
Z	0.009	0.011	0.229	0.279

- STYLE 1:
- PIN 1. RF INPUT
 - GROUND
 - GROUND
 - DELETED
 - VDC
 - DELETED
 - GROUND
 - GROUND
 - RF OUTPUT

CASE 1302-01
ISSUE B

Information in this document is provided solely to enable system and software implementers to use Motorola products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.

MOTOROLA and the Stylized M Logo are registered in the US Patent and Trademark Office. All other product or service names are the property of their respective owners. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

© Motorola Inc. 2003

HOW TO REACH US:

USA/EUROPE/LOCATIONS NOT LISTED:

Motorola Literature Distribution
P.O. Box 5405, Denver, Colorado 80217
1-800-521-6274 or 480-768-2130

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center,
3-20-1, Minami-Azabu, Minato-ku, Tokyo 106-8573, Japan
81-3-3440-3569

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong
852-2668334

HOME PAGE: <http://motorola.com/semiconductors>



MOTOROLA

For More Information On This Product,
Go to: www.freescale.com

MHW8227/D