

MT3S45T



VCO OSCILLETOR STAGE
UHF LOW NOISE AMPLIFIER APPLICATION

Unit: mm

FEATURES

- Low Noise Figure :NF=1.1dB (@f=2GHz)
- High Gain:|S21e|^2=12.0dB (@f=2GHz)

Marking

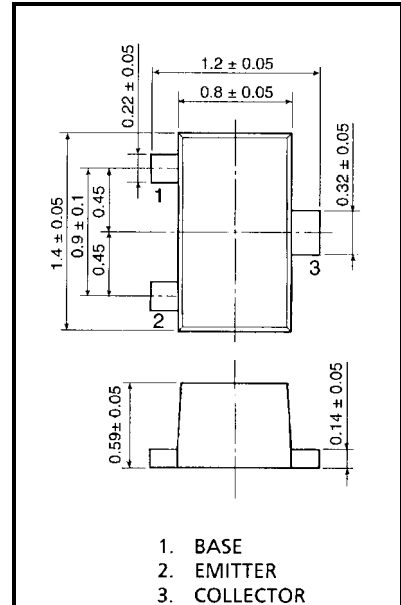

TESM	
JEDEC	—
JEITA	—
TOSHIBA	2-1B1A

Weight:0.0022g (typ.)

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Collector-Base voltage	V _{CBO}	8	V
Collector-Emitter voltage	V _{CEO}	4.5	V
Emitter-Base voltage	V _{EBO}	1.5	V
Collector-Current	I _C	30	mA
Base-Current	I _B	15	mA
Collector Power dissipation	P _C	100	mW
Junction temperature	T _j	150	°C
Storage temperature Range	T _{stg}	-55~150	°C

[查询"MT3S45T"供应商](#)
Microwave Characteristics (Ta = 25°C)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Transition Frequency	fT	V _{CE} =3V, I _C =20mA, f=2GHz	13.5	18	-	GHz
Insertion Gain	S _{21e} ² (1)	V _{CE} =3V, I _C =20mA, f=1GHz	-	17.5	-	dB
	S _{21e} ² (2)	V _{CE} =3V, I _C =20mA, f=2GHz	9.5	12	-	dB
Noise Figure	NF(1)	V _{CE} =3V, I _C =6mA, f=1GHz	-	0.9	-	dB
	NF(2)	V _{CE} =3V, I _C =6mA, f=2GHz	-	1.1	1.6	dB

Electrical Characteristics (Ta = 25°C)







Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Collector Cut-off Current	I _{CBO}	V _{CB} =8V, I _E =0	-	-	1	μA
Emitter Cut-off Current	I _{EBO}	V _{EB} =1V, I _C =0	-	-	1	μA
DC Current Gain	hFE	V _{CE} =3V, I _C =10mA	70	-	140	-
Output Capacitance	C _{ob}	V _{CB} =1V, I _E =0, f=1MHz	-	0.66	1.10	pF
Reverse Transistor Capacitance	C _{re}	V _{CB} =1V, I _E =0, f=1MHz (Note 1)	-	0.33	0.55	pF

Note 1: C_{re} is measured by 3 terminal method with capacitance bridge.

Caution: This device is sensitive to electrostatic discharge.

Please make enough tool and equipment earthed when you handle.

[查询"MT3S45T"供应商](#)

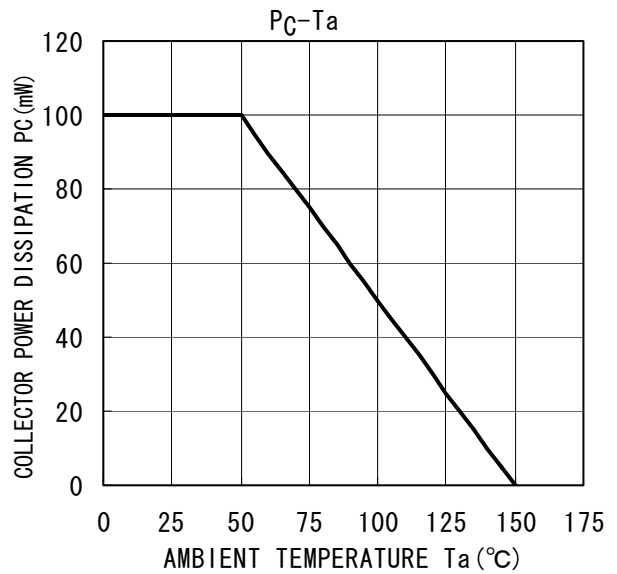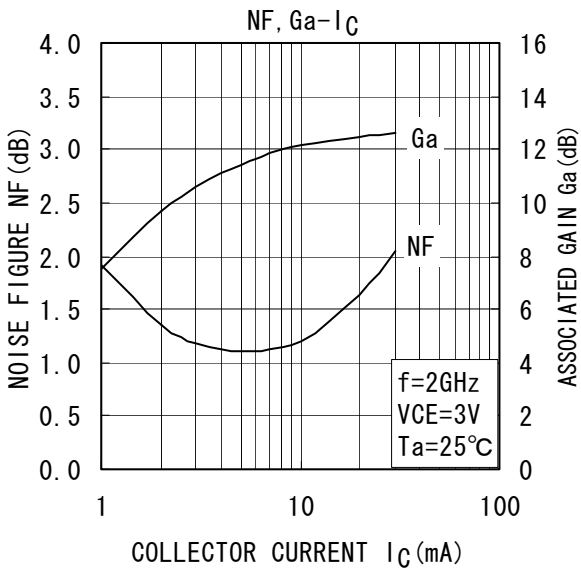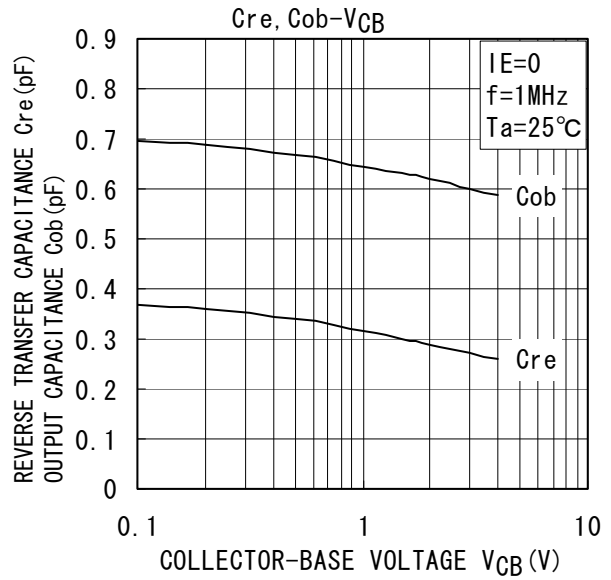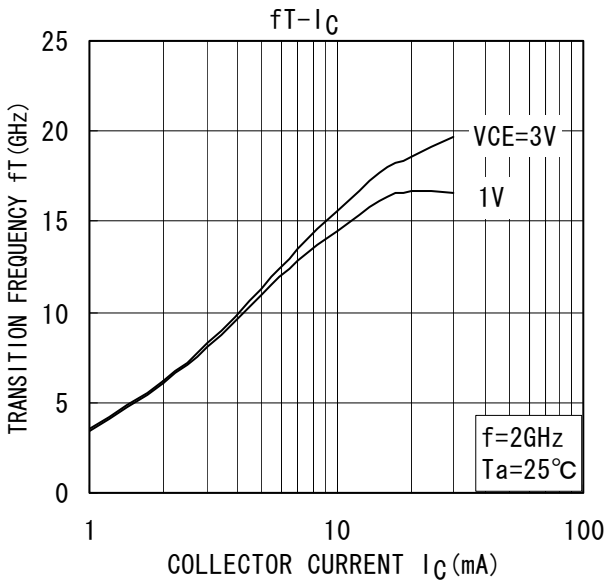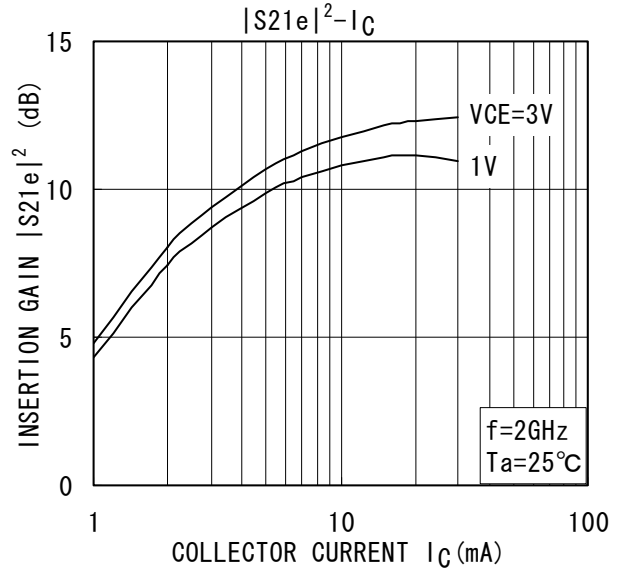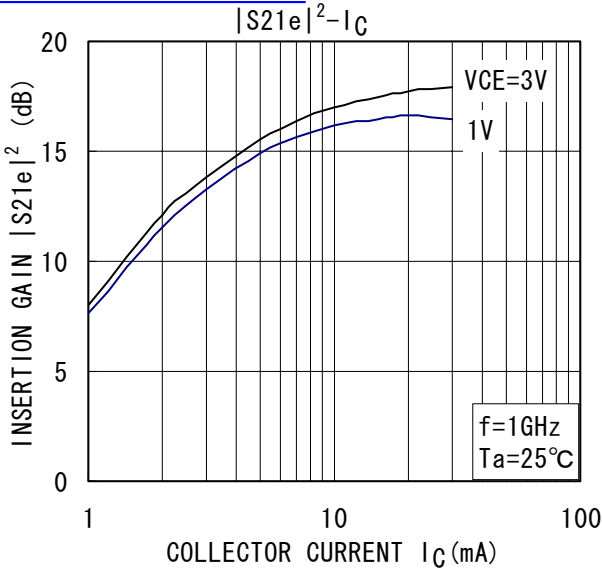

[查询"MT3S45T"供应商](#)

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.