


[查询"3SK137"供应商](#)

3SK137

SILICON N-CHANNEL DUAL GATE MOS FET


UHF TV TUNER RF AMPLIFIER

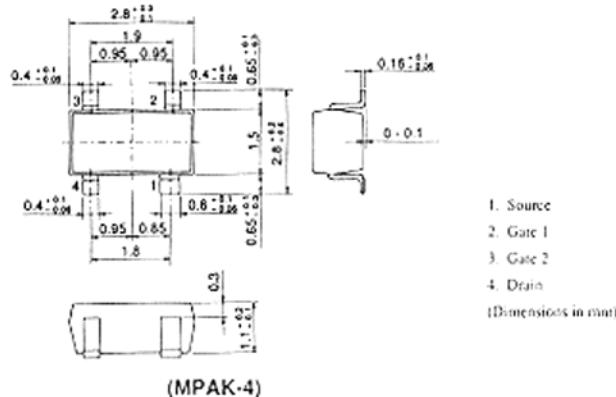

■ ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

Item	Symbol	3SK137	Unit
Drain to source voltage	V_{DS}	15	V
Gate 1 to source voltage	V_{G1S}	± 10	V
Gate 2 to source voltage	V_{G2S}	± 10	V
Drain current	I_D	35	mA
Channel power dissipation	P_{ch}	150	mW
Channel temperature	T_{ch}	125	$^\circ\text{C}$
Storage temperature	T_{sg}	-55 to +125	$^\circ\text{C}$

MAXIMUM CHANNEL POWER DISSIPATION CURVE

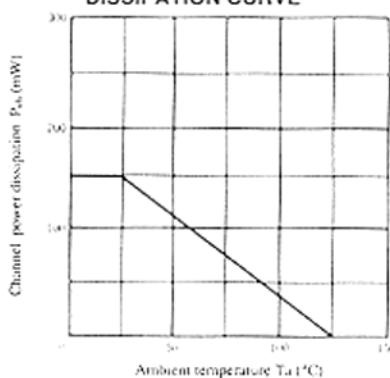

■ ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

Item	Symbol	Test Condition	min.	typ.	max.	Unit
Drain to source breakdown voltage	$V_{(BR)DSX}$	$V_{G1S} = V_{G2S} = -5\text{V}$, $I_D = 200\mu\text{A}$,	15	—	—	V
Gate 1 to source breakdown voltage	$V_{(BR)G1SS}$	$I_{G1} = \pm 10\mu\text{A}$, $V_{G2S} = V_{DS} = 0$	± 10	—	—	V
Gate 2 to source breakdown voltage	$V_{(BR)G2SS}$	$I_{G2} = \pm 10\mu\text{A}$, $V_{G1S} = V_{DS} = 0$	± 10	—	—	V
Gate 1 cutoff current	I_{G1SS}	$V_{G1S} = \pm 8\text{V}$, $V_{G2S} = V_{DS} = 0$	—	—	± 100	nA
Gate 2 cutoff current	I_{G2SS}	$V_{G1S} = \pm 8\text{V}$, $V_{G1S} = V_{DS} = 0$	—	—	± 100	nA
Gate 1 to source cutoff voltage	$V_{G1S(c)}(0)$	$V_{DS} = 10\text{V}$, $V_{G2S} = 3\text{V}$, $I_D = 100\mu\text{A}$	—	—	-2.0	V
Gate 2 to source cutoff voltage	$V_{G2S(c)}(0)$	$V_{DS} = 10\text{V}$, $V_{G1S} = 3\text{V}$, $I_D = 100\mu\text{A}$	—	—	-2.0	V
Drain current	I_{DSS}	$V_{DS} = 6\text{V}$, $V_{G2S} = 3\text{V}$, $V_{G1S} = 0$	—	—	20	mA
Forward transfer admittance	$ Y_{f1} $	$V_{DS} = 6\text{V}$, $V_{G2S} = 3\text{V}$, $I_D = 10\text{mA}$, $f = 1\text{kHz}$	14	—	—	mS
Input capacitance	C_{iss}	$V_{DS} = 6\text{V}$, $V_{G2S} = 3\text{V}$, $I_D = 10\text{mA}$, $f = 1\text{MHz}$	—	2.6	—	pF
Output capacitance	C_{oss}		—	1.8	—	pF
Reverse transfer capacitance	C_{rss}		—	0.02	—	pF
Power gain	PG	$V_{DS} = 6\text{V}$, $V_{G2S} = 3\text{V}$, $I_D = 10\text{mA}$,	10	—	—	dB
Noise figure	NF	$f = 900\text{MHz}$	—	—	5.0	dB

* Marking is [PW-].

■ See characteristic curves of 3SK104.