

C&K 3 Series Thumbwheel Switches

查询 357110000 供应商



Features/Benefits

- Most complete product offering in the industry
- Spacers available to fit most panel cutouts
- Front or rear mounting options

Typical Applications

- Test & measurement equipment
- Industrial equipment
- Computer devices

Specifications

CONTACT RATING:

CARRY: 1 AMP continuous.

SWITCH: 100 mA max.

OPERATING VOLTAGE: 50 mV to 28 V DC or 120 V AC.

ELECTRICAL LIFE: 100,000 actuations.

CONTACT RESISTANCE: Below 100 m Ω typ. initial @ 2-4 V DC, 100 mA.

INSULATION RESISTANCE: $10^9 \Omega$ min.

DIELECTRIC STRENGTH: 500 Vrms min. @ sea level between common terminal and any output.

OPERATING TEMPERATURE: -10°C to 65°C.

Materials

HOUSING: ABS plastic.

THUMBWHEEL: ABS plastic.

ROTOR CONTACTS: Precious metal on copper alloy.

STATOR CONTACTS: Hard gold over nickel over copper on epoxy fiberglass.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

* Note: All models listed are RoHS compliant. See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages N-9 thru N-12. For additional options not shown in catalog, consult Customer Service Center.

Consult factory for illumination availability.

Thumbwheel & Pushwheel

Series

3 Thumbwheel switch

Number of Sections

- 0 Switch section
- 1 1 Switch section
- 2 2 Switch sections
- 3 3 Switch sections
- 4 4 Switch sections
- 5 5 Switch sections
- 6 6 Switch sections
- 7 7 Switch sections
- 8 8 Switch sections
- 9 More than 8 switch sections

Function Code

- 11 Decimal, SP, 10 position
- 14 Resistor decade
- 21 BCD, 10 position
- 23 Complement of BCD, 10 position
- 27 BCD, 10 position
- 31 BCD, 10 position
- 71 BCH, 16 position

Mounting Style

- 00 Snap-in, front mount
- 09 Snap-in, front mount*
- 10 Rear mount
- 19 Rear mount*
- 20 Rear mount
- 29 Rear mount*

Terminations

- 0 Type 0
- 1 Type 1, extended type 0
- N Solder pins with .100" spacing**
- P Solder pins with .156" spacing**
- 9 Any combination

Color/Marking/Stops

- 0 Matte black body, gloss black wheel, white marking

Seal

- 0 No seal
- 1 Sealed contacts
- 2 Dust lens
- 3 Sealed contacts & dust lens

*X9 mounting styles must be ordered with '0' number of sections.

** Note: Termination option N (RoHS compliant) replaced termination option 3 (Non-RoHS compliant). Termination option P (RoHS compliant) replaced termination option B (Non-RoHS compliant).



N


Dimensions are shown: Inch (mm)

Specifications and dimensions subject to change

www.ittcannon.com

SERIES

3 THUMBWHEEL SWITCHES

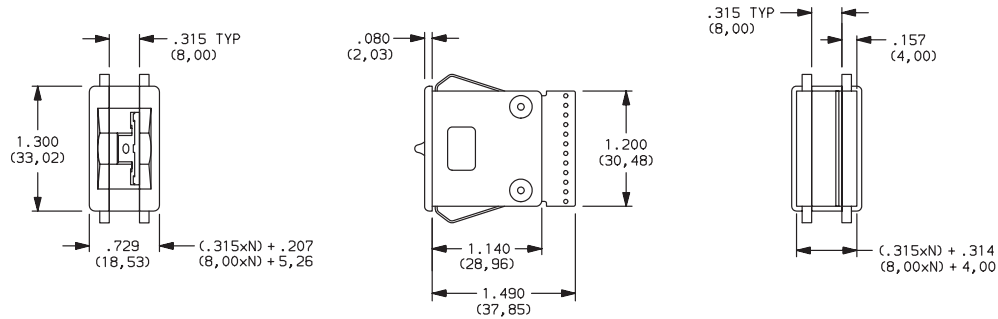

NUMBER OF SECTIONS

- 0 Switch section only, no assembly. Blank bodies are considered sections; endplates are not sections. Must be ordered with 09 or 19 mounting style options, see pages N-10 and N-11.
- 1-8 Number of switch sections in assembly, includes endplates.
- 9 More than 8 switch sections, specify on CONFIGURATION FORM, page N-15 and consult Customer Service Center.


NOTE: Endplates and blank sections available separately, see pages N-13 and N-14.

FUNCTION CODE

- 11 DECIMAL-1 POLE; 10 POSITION
- 14 RESISTOR DECADE; 1-2-2-2-2 CODE (RESISTORS NOT SUPPLIED)
- 21 BCD 1-2-4-8; 10 POSITION

W H E E L	SIGNALS CONNECTED TO COMMON SIGNAL C											C
	0	1	2	3	4	5	6	7	8	9		
0	●											●
1		●										●
2			●									●
3				●								●
4					●							●
5						●						●
6							●					●
7								●				●
8									●			●
9										●		●
	2	3	4	5	6	7	8	9	10	11	12	
TERM. LOCATION												

Available Terminations: 0, 1, N
See fig. 1, page N-12.



Available Terminations: 1
See fig. 1, page N-12.

W H E E L	SIGNALS CONN. TO COMM. SIG. C					C
	1	2	4	8		
0						●
1	●					●
2		●				●
3			●			●
4				●		●
5	●				●	●
6		●				●
7			●			●
8				●		●
9	●					●
	3	5	7	11	9	
TERM. LOCATION						

Available Terminations: 0, 1, N
See fig. 1, page N-12.

NOTE: For terminal location diagram, see page N-12.

C&K 3 Series Thumbwheel Switches

查询"357110000" 供应商

FUNCTION CODE

23 COMPLEMENT OF BCD 1-2-4-8;
10 POSITION

W H E E L	SIGNALS CONN. TO COMM. SIG. C			
	1	2	4	8
0	●	●	●	●
1	●	●	●	●
2	●	●	●	●
3	●	●	●	●
4	●	●	●	●
5	●	●	●	●
6	●	●	●	●
7	●	●	●	●
8	●	●	●	●
9	●	●	●	●
TERM. LOCATION				

Available Terminations: 0, 1, N
See fig. 1, page N-12.

27 BCD 1-2-4-8; 10 POSITION

W H E E L	SIGNALS CONN. TO COMM. SIG. C			
	1	2	4	8
0	●	●	●	●
1	●	●	●	●
2	●	●	●	●
3	●	●	●	●
4	●	●	●	●
5	●	●	●	●
6	●	●	●	●
7	●	●	●	●
8	●	●	●	●
9	●	●	●	●
TERM. LOCATION				

Available Terminations: P
See fig. 2, page N-12.

31 BCD 1-2-4-8; 10 POSITION

W H E E L	SIGNALS CONN. TO COMM. SIG. C			
	1	2	4	8
0	●	●	●	●
1	●	●	●	●
2	●	●	●	●
3	●	●	●	●
4	●	●	●	●
5	●	●	●	●
6	●	●	●	●
7	●	●	●	●
8	●	●	●	●
9	●	●	●	●
TERM. LOCATION				

Available Terminations: 0, 1, N
See fig. 1, page N-12.

71 BINARY CODED HEXADECIMAL,
16 POSITION

W H E E L	SIGNALS CONN. TO COMM. SIG. C			
	1	2	4	8
0	●	●	●	●
1	●	●	●	●
2	●	●	●	●
3	●	●	●	●
4	●	●	●	●
5	●	●	●	●
6	●	●	●	●
7	●	●	●	●
8	●	●	●	●
9	●	●	●	●
A	●	●	●	●
B	●	●	●	●
C	●	●	●	●
D	●	●	●	●
E	●	●	●	●
F	●	●	●	●
TERM. LOCATION				

Available Terminations: 0, 1, N
See fig. 1, page N-12.

NOTE: For terminal location diagram, see page N-12.

MOUNTING STYLE


Type 0 Snap-In Front Mount

MOUNTING STYLE	DIM. 'A'
00	$(.315 \times N) + .326$ $(8.00 \times N) + (8.28)$




N = Number of sections.

Recommended panel thickness:
0.46-.125
(1.16-3.18)

PANEL MOUNTING




00 SWITCH ASSEMBLY W/ ENDPLATES--.315 (8.00) SECTION PITCH



N = Number of sections.

09 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS
(Must be ordered with number of sections option "0", see Page N-9.)

NOTE: Endplates, blank sections, spacers
and assembly hardware available separately, see pages N-13 and N-14.



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

www.ittcannon.com

MOUNTING STYLE


Type 1 Rear Mount

MOUNTING STYLE	DIM. 'A'	DIM. 'B'
10	$(.350 \times N) + .340$ (8,89 x N) + (8,64)	$(.350 \times N) + .560$ (8,89 x N) + (14,22)




N = Number of sections.

Recommended panel thickness:
0.46-.125
(1,16-3,18)

PANEL MOUNTING

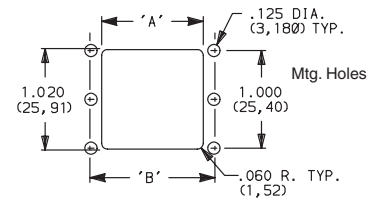




10 SWITCH ASSEMBLY W/ ENDPLATES--.350 (8,89) SECTION PITCH

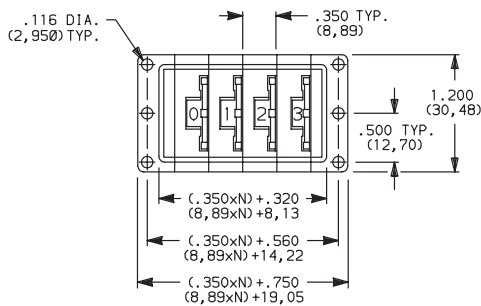

19 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS (Must be ordered with number of sections option "0", see Page N-9.)

Type 2 Rear Mount

20 SWITCH ASSEMBLY W/ ENDPLATES--.350 (8,89) SECTION PITCH

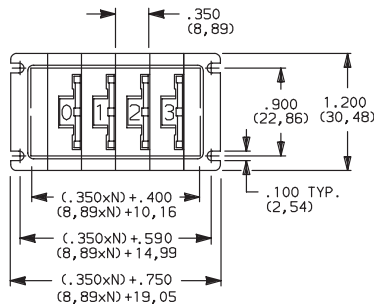

29 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS (Must be ordered with number of sections option "0", see Page N-9.)

NOTE: Endplates, blank sections, spacers and assembly hardware available separately, see pages N-13 and N-14.





C&K 3 Series
Thumbwheel Switches

查询 357110000 供应商


TERMINATIONS

- 0** TYPE 0

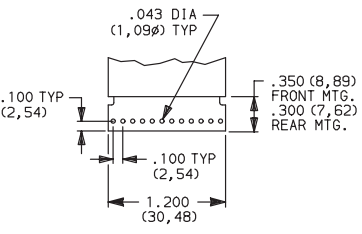

- 1** TYPE 1, EXTENDED TYPE 0

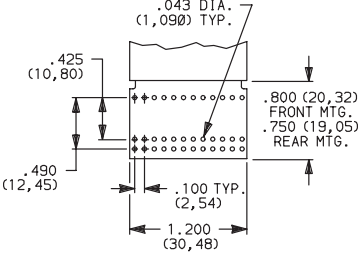

Signal traces cut except for common(s).
- N** SOLDER PINS WITH .100" SPACING

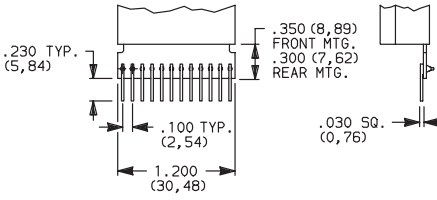
- 9** ANY COMBINATION OF TERMINATION CONFIGURATIONS OR SPECIAL TERMINATIONS.

Specify on configuration form, page N-15 and consult Customer Service Center.
- P** SOLDER PINS WITH .156" SPACING

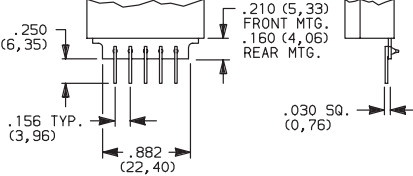

PC Board 1/32" (0,79) thick.

NOTE: All terminal holes shown may not be present for all function codes, consult Customer Service Center. Terminal connector available for termination options 0 & 1, see page N-14.

NOTE: Termination option N (RoHS compliant) replaced termination option 3 (Non-RoHS compliant). Termination option P (RoHS compliant) replaced termination option B (Non-RoHS compliant).

Terminal Location Numbers




FIG. 1




FIG. 2

NOTE: See function codes, pages N-9 and N-10, for signal locations.


COLOR/MARKING/STOPS

- 0** MATTE BLACK HOUSING (Gloss black wheel with white characters; no stops.)


NOTE: Stop pins are available separately, see page N-14.

SEAL

- 0** UNSEALED SWITCHING CONTACTS.
- 1** SEALED SWITCHING CONTACTS. (Sealing is by means of an o-ring rotary seal and a cured-in-place elastomer gasket. Switching contact area is protected from moisture, oil, and airborne contaminants.)
- 2** DUST LENS. (Protects the character face of the wheel from abrasion and dirt.)
- 3** SEALED SWITCHING CONTACTS AND DUST LENS



Dust Lens



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change



AVAILABLE HARDWARE

<p>Blank sections, Type 0, .315 THK.</p>  <p>PART NO. 413602000 W/RIB-BLACK 400502000 W/RIB & W/OUT SPRINGS-BLACK</p>	<p>Blank sections, Front mount, Type 0, .315 THK.</p>  <p>PART NO. 413502000 PLAIN-BLACK 400702000 PLAIN & W/OUT SPRINGS-BLACK</p>	<p>Blank sections, Rear mount, Type 1, .350 THK.</p>  <p>4006 4008</p> <p>PART NO. 400602000 W/RIB-BLACK 400802000 PLAIN-BLACK</p>
<p>Blank sections, Rear mount, Type 2, .350 THK.</p>  <p>4734 4733</p> <p>PART NO. 473402000 W/RIB-BLACK 473302000 PLAIN-BLACK</p>	<p>End plates, Front mount, Type 0</p>  <p>PART NO. 413402000 BLACK</p> <p>Two required for complete assembly.</p>	<p>End plates, Rear mount, Type 1</p>  <p>PART NO. 400402000 BLACK</p> <p>Two required for complete assembly.</p>
<p>End plates, Rear mount, Type 2</p>  <p>PART NO. 473202000 BLACK</p> <p>Two required for complete assembly.</p>	<p>Spacers, Front mount, Type 0 & 3, .078 THK. (Makes section pitch 10mm)</p>  <p>PART NO. 410802000 BLACK</p>	<p>Stop pins</p>  <p>PART NO. 402900000</p>

Thumbwheel & Pushwheel




N

C&K 3 Series Thumbwheel Switches

[查询"357110000" 供应商](#)

AVAILABLE HARDWARE

Terminal connector



605A00000



605A02000

PART NO.
605A00000 PC
605A02000 SOLDER LUG

Fits 0 & 1 terminations only.

Screws for field assembly of thumbwheel switches
(2 screws needed per assembly + 403500000 nuts)

SCREW PART NUMBER (0-80 UNF THD. SIZE)	NUMBER OF SECTIONS IN ASSEMBLY	
	FRONT MOUNTING	REAR MOUNTING
	MTG. STYLE - 00	MTG. STYLE - 10
412700000	1-2	1-2
412701000	3-4	3
412702000	5-7	4-6

Nut



Two nuts required per assembly and screws.

PART NO.
403500000

Nut driver (For 403500000 nut)



PART NO.
406100652

Thumbwheel & Pushwheel



N

Configuration Form

GRAY SHADED AREAS TO BE FILLED IN BY CUSTOMER SERVICE.

CATALOG PART NO.

3

C&K PART NUMBER

C&K PART NUMBER

COMPANY NAME


ADDRESS TEL.#

CUSTOMER CONTACT DATE

ORIGINATED BY SALES REP.

CUSTOMER
PRINT
REVISION:

DETAILS:

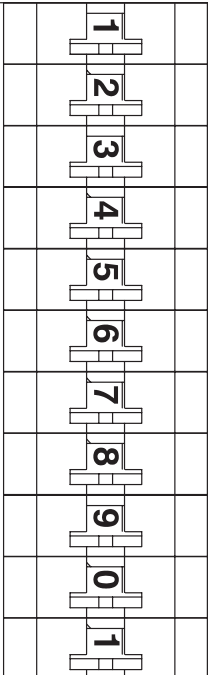THUMBWHEEL SECTIONS	NO. OF SEC.	FUNCTION CODE – TERMINATIONS – COLOR/MARKING/STOPS/SEAL – ILLUMINATION <small>ENTER OPTION CODES IN APPROPRIATE BOXES. FUNCTION CODES INCLUDE BLANK SECTIONS (SEE PAGES M-9 & M-10).</small>	DESCRIBE IN APPROPRIATE ROW
	1	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	2	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	3	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	4	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	5	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	6	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	7	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	8	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	9	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	10	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	
	11	<input type="text"/> 3 <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> – <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	

QUALITY CONTROL INSTRUCTIONS

PRODUCTION APPROVAL DATE

Q.C. APPROVAL DATE

REV. INITIALS DATE

FOR SWITCHES WITH MORE THAN 11 SECTIONS, CONTINUE ON ADDITIONAL SHEETS.

SPECIAL INSTRUCTIONS OR SPECIFICATIONS:

SHEET ____ OF ____