




ISDN/Smartphone Splitter

APC77115


ELECTRICAL SPECIFICATIONS@25°C OPERATING TEMPERATURE -40°C TO +85°C

Description	Passband Frequency	Insertion Loss max	Return Loss min	Stopband Frequency	Attenuation min	Impedance
ISDN/ Smartphone Splitter LPF	DC to 660kHz	0.8 dB	15 dB	900kHz to 7.9 MHz	50 dB	150 Ω

SCHEMATIC

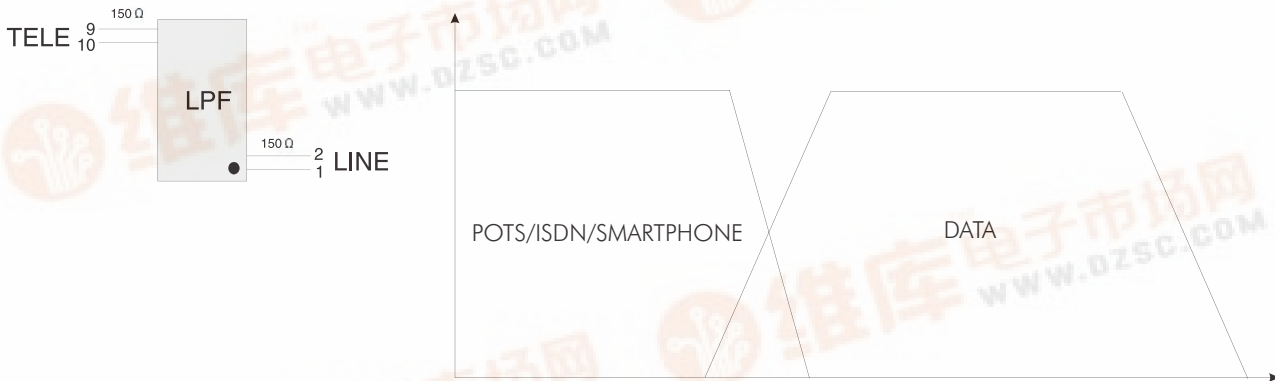

MECHANICAL

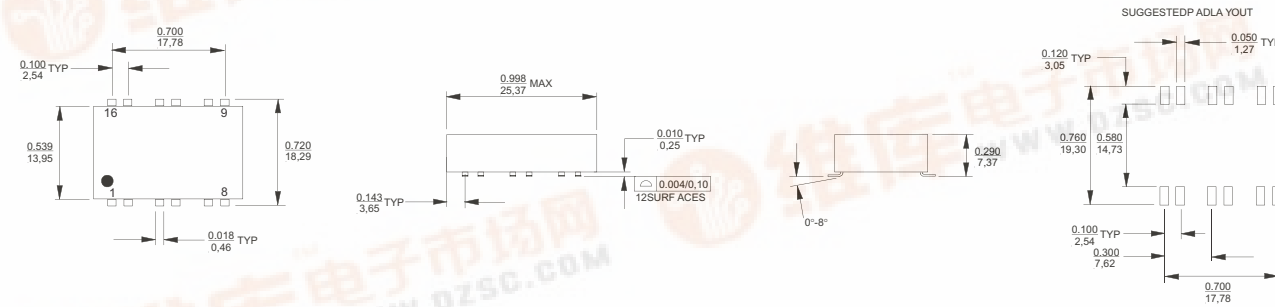

NOTES: DIMENSIONS INCHES UNLESS OTHERWISE SPECIFIED
MM

ALL TOLERANCES +/- 0.010
0.25

