

[查询"1SS388PT"供应商](#)



CHENMKO ENTERPRISE CO., LTD

Lead free devices

SURFACE MOUNT
SCHOTTKY BARRIER DIODE
VOLTAGE 40 Volts CURRENT 0.1 Ampere

1SS388PT

APPLICATION

- * Low current rectification and high speed switching

FEATURE

- * Extremely small surface mounting type. (SC-79/SOD-523)
- * $I_o=200\text{mA}$ guaranteed despite size
- * Low VF. ($V_F=0.40\text{V}$ Typ. at 200mA)


CONSTRUCTION

- * Silicon epitaxial planar

CIRCUIT



SC-79/SOD-523

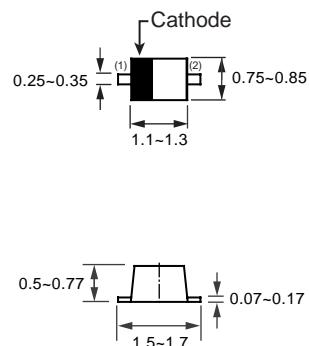

Dimensions in millimeters

SC-79/SOD-523

MAXIMUM RATINGS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

| RATINGS | SYMBOL | 1SS388PT | | UNITS |
|--|-----------|-------------|--|-------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 40 | | Volts |
| Maximum RMS Voltage | V_{RMS} | 28 | | Volts |
| Maximum DC Blocking Voltage | V_{dc} | 40 | | Volts |
| Maximum Average Forward Rectified Current | I_o | 0.1 | | Amps |
| Peak Forward Surge Current at 8.3 mSec single half sine-wave | I_{FSM} | 1.0 | | Amps |
| Typical Junction Capacitance between Terminal (Note 1) | C_J | 2.0 | | pF |
| Maximum Operating Temperature Range | T_J | +125 | | °C |
| Storage Temperature Range | T_{STG} | -40 to +125 | | °C |

ELECTRICAL CHARACTERISTICS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

| CHARACTERISTICS | SYMBOL | 1SS388PT | | | UNITS |
|---|--------|----------------------------|-----------------------------|-----------------------------|-------|
| Maximum Instantaneous Forward Voltage | V_F | 0.28 at $I_F = 1\text{mA}$ | 0.36 at $I_F = 10\text{mA}$ | 0.60 at $I_F = 50\text{mA}$ | Volts |
| Maximum Average Reverse Current at $V_R = 10\text{V}$ | I_R | 5.0 | | | uAmps |

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 1.0 volts.
2. ESD sensitive product handling required.

2001-6

[查询"1SS388PT"供应商](#)

RATING CHARACTERISTIC CURVES (1SS388PT)

FIG. 1 - FORWARD CHARACTERISTICS

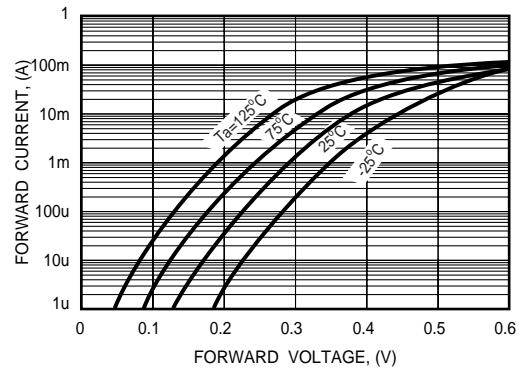


FIG. 2 - REVERSE CHARACTERISTICS

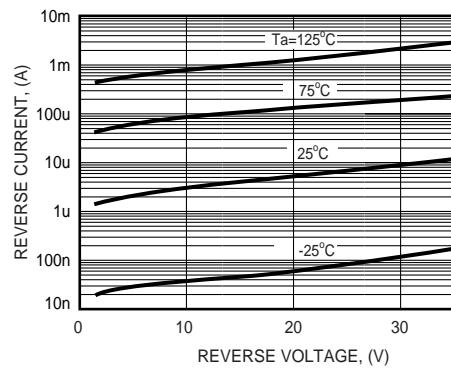


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

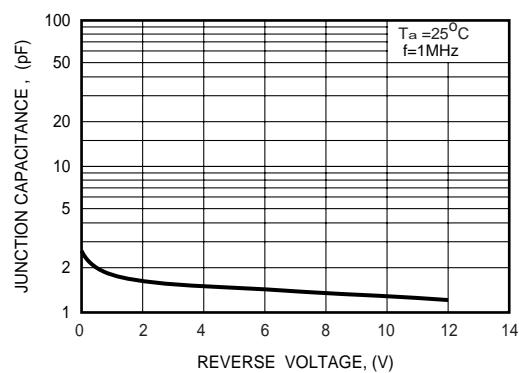


FIG. 4 - TYPICAL FORWARD CURRENT DERATING CURVE

