

[查询"NJM2396F"供应商](#)

LOW DROPOUT VOLTAGE REGULATOR WITH ON/OFF CONTROL


■ GENERAL DESCRIPTION

The NJM2396 is low dropout voltage regulator with ON/OFF control.

The output current is up to 1.5A and dropout voltage is 0.2V typ. at $I_o=0.5A$.

The NJM2396 is suitable for power module, TV, Display, car stereo and low power applications.

■ PACKAGE OUTLINE




NJM2396F

■ FEATURE

- Low Dropout Voltage $\Delta V_{I-O}=0.2V$ typ. at $I_o=0.5A$
- Output Current $I_o(\text{max.})=1.5A$
- ON/OFF Control
- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline TO-220F-4

■ PIN CONFIGURATION



NJM2396F


PIN FUNCTION

1. V_{IN}
2. V_{OUT}
3. GND
4. ON/OFF CONTROL

■ OUTPUT VOLTAGE RANK LIST

Device Name	V_{OUT}
NJM2396F33	3.3V
NJM2396F05	5.0V
NJM2396F63	6.3V
NJM2396F08	8.0V
NJM2396F83	8.3V
NJM2396F09	9.0V
NJM2396F12	12.0V

■ EQUIVALENT CIRCUIT

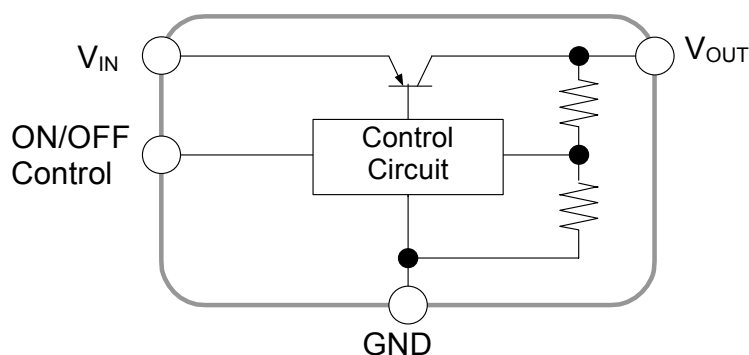

NJM2396

[查询"NJM2396F"供应商](#)

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	+35	V
Control Voltage	V_{CONT}	+35(*1)	V
Output Current	I_O	1.5	A
Power Dissipation	P_D	18(Tc<50°C)	W
Operating Junction Temperature Range	T_J	-40 to +150	°C
Operating Temperature Range	T_{opr}	-40 to 85	°C
Storage Temperature Range	T_{stg}	-50 to 150	°C

(*1): When input voltage is less than +35V, the absolute maximum control voltage is equal to the input voltage.


■ ELECTRICAL CHARACTERISTICS ($V_{IN}=V_O+1V, I_O=0.5A, C_{IN}=0.33\mu F, C_O=22\mu F, T_J=25^\circ C$)

Measurement is to be conducted is pulse testing.

PARAMETER		SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage		V_O	$V_{IN}=V_O+1V$	-4%	-	+4%	V
Line Regulation		$\Delta V_O/\Delta V_{IN}$	$V_{IN}=V_O+1V$ to V_O+17V	-	0.04	0.16	%/V
Load Regulation		$\Delta V_O/\Delta I_O$	$V_{IN}=V_O+2V, I_O=0A$ to $1.5A$	-	0.2	1.4	%/A
Average Temperature Coefficient of Output Voltage		$\Delta V_O/\Delta T$	$T_J=0$ to $125^\circ C$	-	± 0.02	-	%/°C
Standby Current		I_Q	$I_O=0A$	-	-	5	mA
Dropout Voltage		ΔV_{LO}	$I_O=0.5A$	-	0.2	0.5	V
Ripple Rejection	NJM2396F33	RR	$V_{IN}=V_O+2V$ $e_{in}=0.5V_{rms}, f=120Hz$	52	60	-	dB
	NJM2396F05			52	60	-	
	NJM2396F63			52	60	-	
	NJM2396F08			50	58	-	
	NJM2396F83			50	58	-	
	NJM2396F09			50	58	-	
	NJM2396F12			48	58	-	
ON Control Voltage		$V_{CONT(ON)}$		2.0(*2)	-	-	V
OFF Control Voltage		$V_{CONT(OFF)}$		-	-	0.4	V
ON Control Current		$I_{CONT(ON)}$	$V_C=2.7V$	-	-	20	μA
OFF Control Current		$I_{CONT(OFF)}$	$V_C=0.4V$	-	-	-20	μA


(*2): When ON/OFF CONTROL Terminal is open, Output Voltage is ON.







■ TEST CIRCUIT

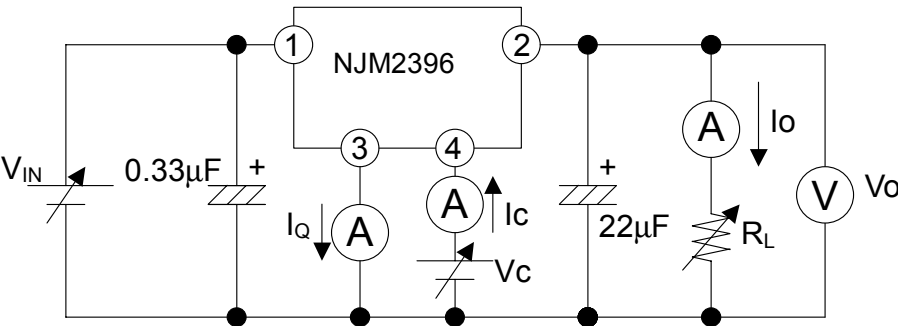

[查询"NJM2396F"供应商](#)







■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

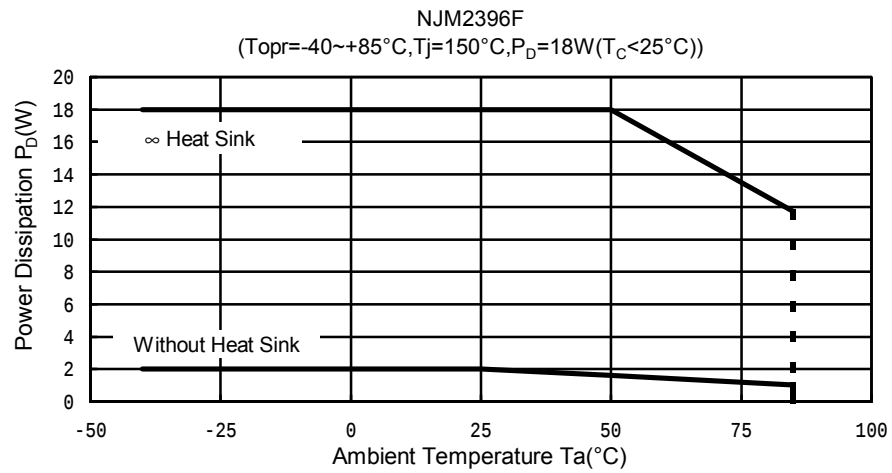

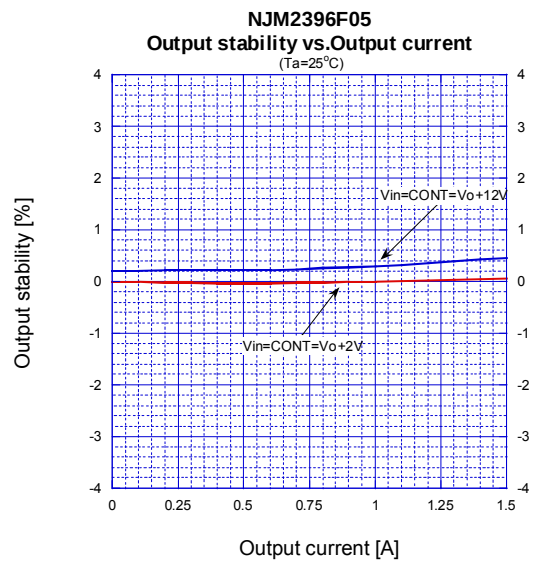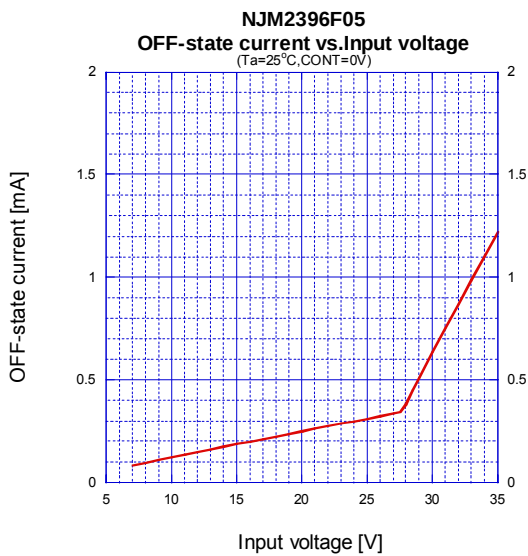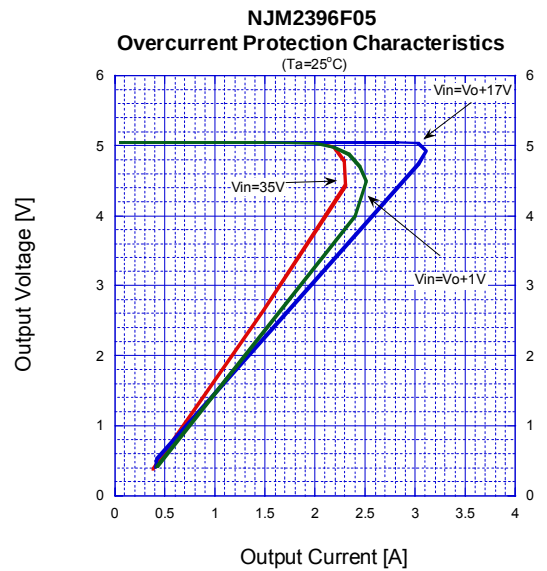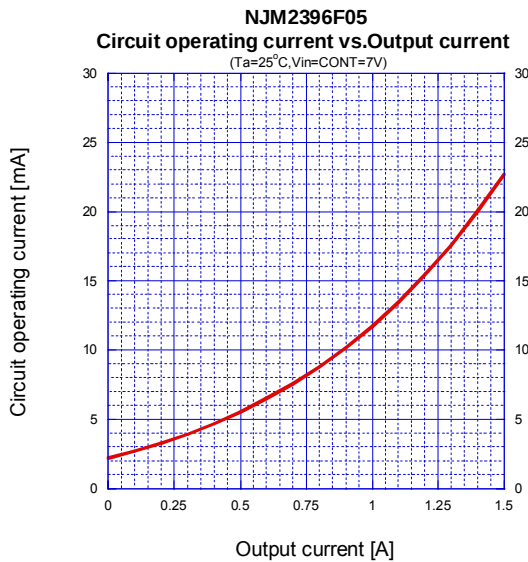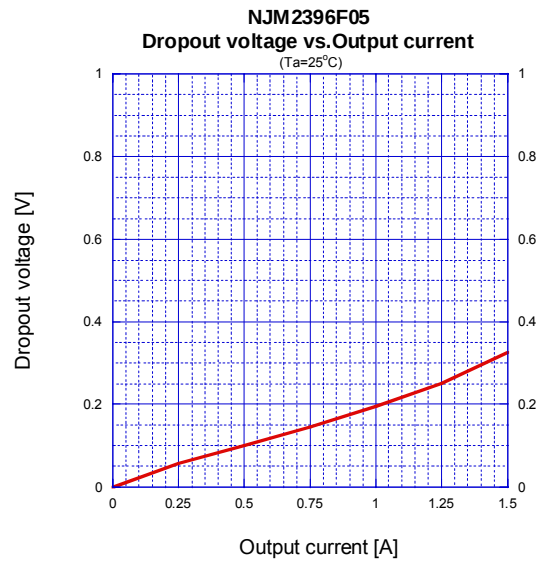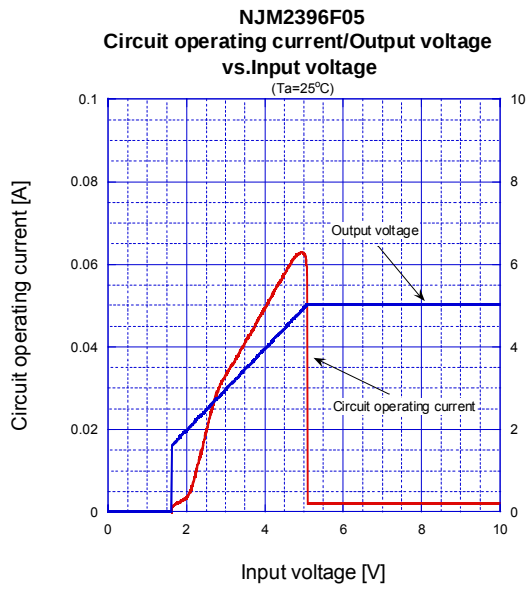

[查询"NJM2396F"供应商](#)




■ TYPICAL CHARACTERISTICS

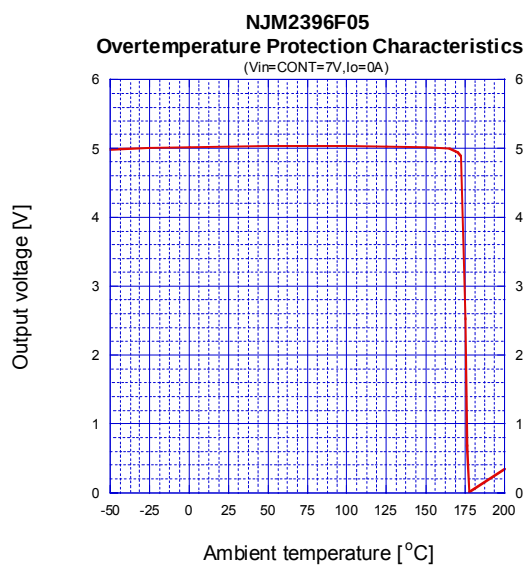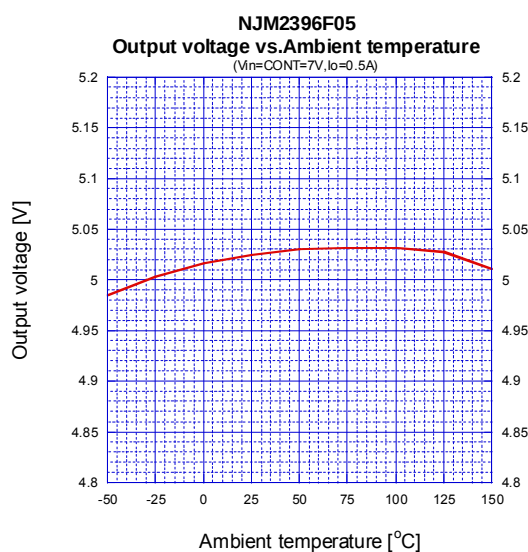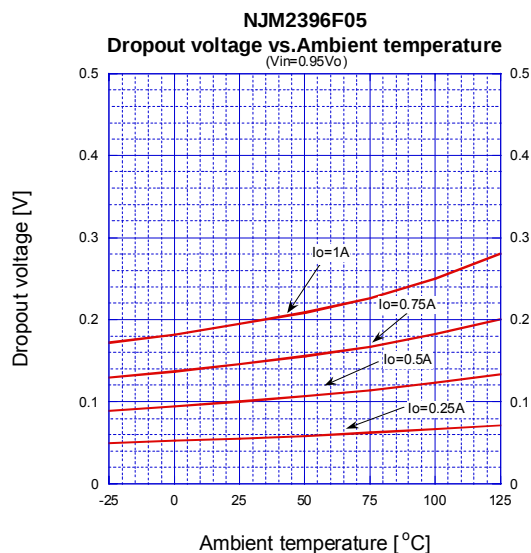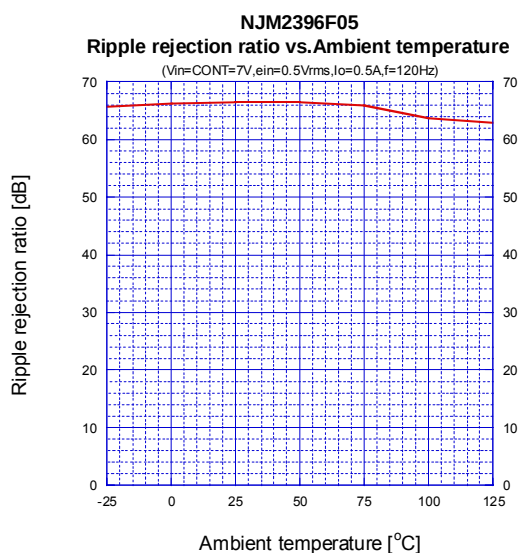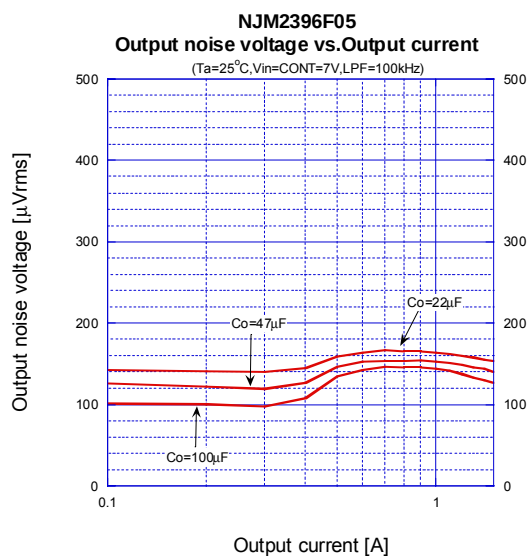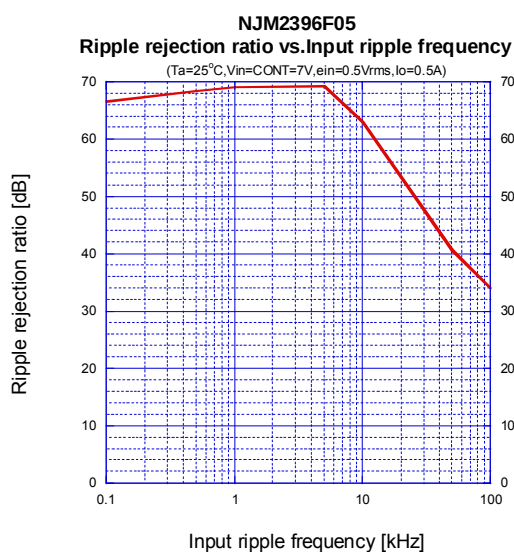

NJM2396

[查询"NJM2396F"供应商](#)

TYPICAL CHARACTERISTICS

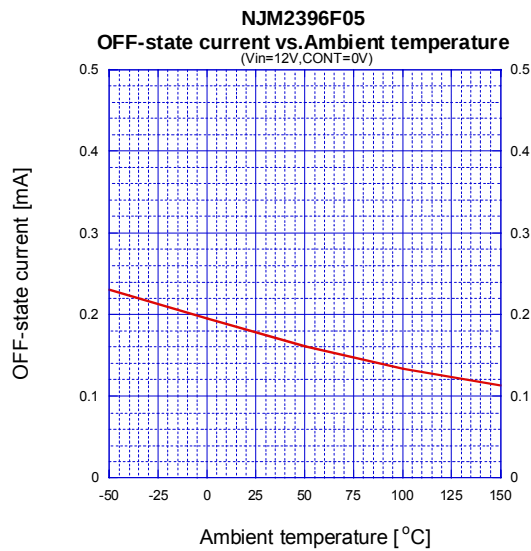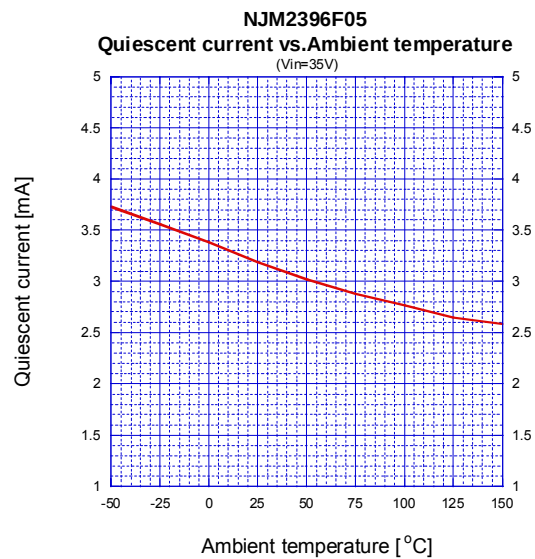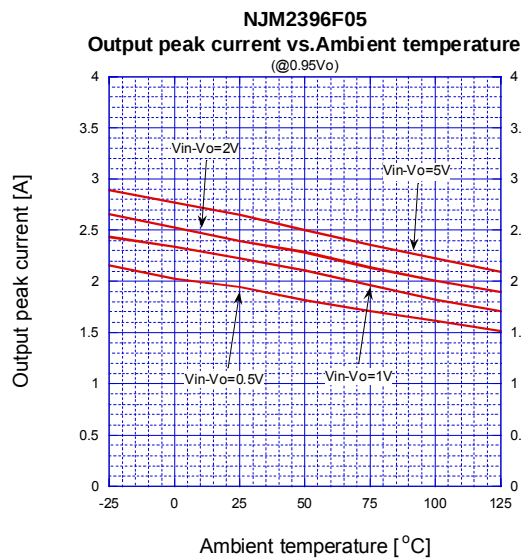

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.