


A_D-W25 & B_LD-W25 Series

0.25W, FIXED INPUT, ISOLATED & UNREGULATED
 DUAL/SINGLE OUTPUT DC-DC CONVERTER

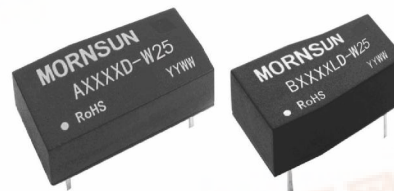

multi-country patent protection **RoHS**

FEATURES

1KVDC Isolation
 DIP Package
 Internal SMD Construction
 Temperature Range: -40°C to +85°C
 No Heat sink Required
 No External Component Required
 Industry Standard Pinout
 RoHS Compliance

APPLICATIONS

The A_D-W25 & B_LD-W25 Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

MODEL SELECTION

B0505LD-W25



MORNSUN Science & Technology co., Ltd.

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China
 Tel: 86-20-38601850
 Fax: 86-20-38601272
<http://www.mornsun-power.com>

PRODUCT PROGRAM

Part Number	Input		Output		Efficiency (%, Typ)
	Voltage (VDC)		Voltage (VDC)	Current (mA)	
	Nominal	Range		Max	
B0303LD-W25*	3.3	3.0-3.6	3.3	75.8	62
B0305LD-W25*			5	50	65
A0505D- W25	5	4.5-5.5	±5	±25	62
A0509D- W25*			±9	±13.8	64
A0512D- W25*			±12	±10.4	66
A0515D- W25*			±15	±8.3	65
B0505LD- W25			5	50	64
B0509 LD- W25*			9	27.8	65
B0512 LD- W25			12	20.8	67
B0515 LD- W25			15	16.7	65
A1205D- W25*			12	10.8-13.2	±5
A1209D- W25*	±9	±13.8			63
A1212D- W25*	±12	±10.4			64
A1215D- W25*	±15	±8.3			65
B1203 LD- W25*	3.3	75.8			62
B1205 LD- W25	5	50			65
B1209 LD- W25*	9	27.8			66
B1212 LD- W25	12	20.8			67
B1215 LD- W25*	15	16.7			66
A2405D- W25*	24	21.6-26.4	±5	±25	63
A2409D- W25*			±9	±13.8	64
A2412D- W25*			±12	±10.4	65
A2415D- W25*			±15	±8.3	65
B2405 LD- W25			5	50	63
B2409 LD- W25*			9	27.8	63
B2412 LD- W25*			12	20.8	65
B2415 LD- W25*			15	16.7	65
B2424LD- W25*			24	10.4	64

*Designing

COMMON SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Operating Temp. Range		-40		85	°C
Storage Temp. Range		-55		125	
Storage humidity range				95	%
Cooling		Free air convection			
Temp. rise at full load			15	25	°C
Lead temperature	1.5mm from case for 10 seconds			300	
Short circuit protection*				1	s
Case material		Plastic (UL94-V0)			
MTBF		3500			K hours
Weight			2.1		g

*Supply voltage must be discontinued at the end of short circuit duration.

ISOLATION SPECIFICATIONS

查询 A2415D-W25 供应商

	Test conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1 mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Output power				0.25	W
Line regulation	For Vin change of 1%			±1.5	
	(3.3 output)			±1.2	
	(others output)			±1.2	
Load regulation	10% to 100% load				%
	(3.3 output)		12	20	
	(5V output)		10.5	15	
	(9V output)		8.3	10	
	(12V output)		6.8	10	
	(15V output)		6.3	10	
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% full load			0.03	%/°C
Ripple & Noise*	20MHz Bandwidth		50	75	mVp-p
Switching frequency	Full load, nominal input		100		KHz



*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:


1. All specifications measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.

2. Dual output models unbalanced load: $\pm 5\%$.

TYPICAL CHARACTERISTICS

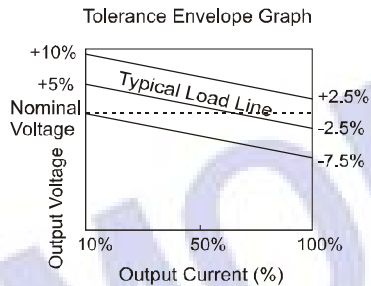

OUTLINE DIMENSIONS & PIN CONNECTIONS



FOOTPRINT DETAILS

Pin	Single	Dual
1	GND	GND
7	NC	NC
8	0V	0V
9	+Vo	+Vo
11	No Pin	-Vo
14	Vin	Vin

Note:

Unit: mm (inch)

Pin section: 0.50*0.30mm (0.020*0.012 inch)

Pin tolerances: $\pm 0.10\text{mm}$ ($\pm 0.004\text{inch}$)

General tolerances: $\pm 0.25\text{mm}$ ($\pm 0.010\text{inch}$)

APPLICATION NOTE

Requirement on output load


To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Recommended circuit


If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

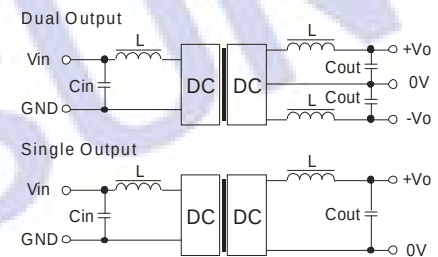

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. It's not recommended to connect any external capacitor in the application field.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

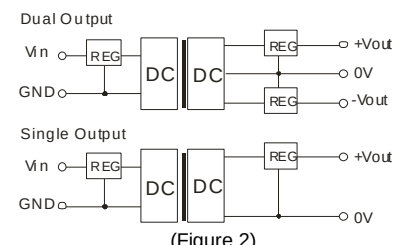

No parallel connection or plug and play.