




PHASE NOISE (1 Hz BW, typical)

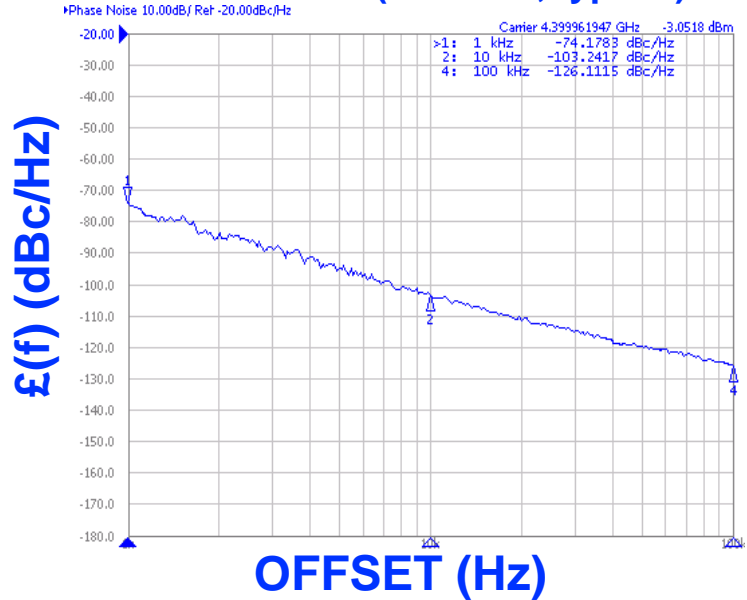

FEATURES

- Frequency Range: 4380 - 4420 MHz
- Tuning Voltage: 0.5 - 4.5 Vdc
- MINI-16 - Style Package

APPLICATIONS

- Microwave Radios
- Satellite Communications
- Direct Broadcast

PERFORMANCE SPECIFICATIONS

| | VALUE | UNITS |
|---|-------------|--------|
| Oscillation Frequency Range | 4380 - 4420 | MHz |
| Phase Noise @ 10 kHz offset (1 Hz BW, typ.) | -104 | dBc/Hz |
| Harmonic Suppression (2nd, typ.) | -15 | dBc |
| Tuning Voltage | 0.5 - 4.5 | Vdc |
| Tuning Sensitivity (avg.) | 18 | MHz/V |
| Power Output | 3±3 | dBm |
| Load Impedance | 50 | Ω |
| Input Capacitance (max.) | 50 | pF |
| Pushing | <2 | MHz/V |
| Pulling (14dB Return Loss, Any Phase) | <3 | MHz |
| Operating Temperature Range | -40 to 85 | °C |
| Package Style | MINI-16 | |

POWER SUPPLY REQUIREMENTS

| | | |
|----------------------------|------|-----|
| Supply Voltage (Vcc, nom.) | 4.75 | Vdc |
| Supply Current (Icc, typ.) | 15 | mA |

All specifications are typical unless otherwise noted and subject to change without notice.


APPLICATION NOTES

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs


NOTES:

查询"CRO4400A-LF"供应商

TUNING CURVE, typ.

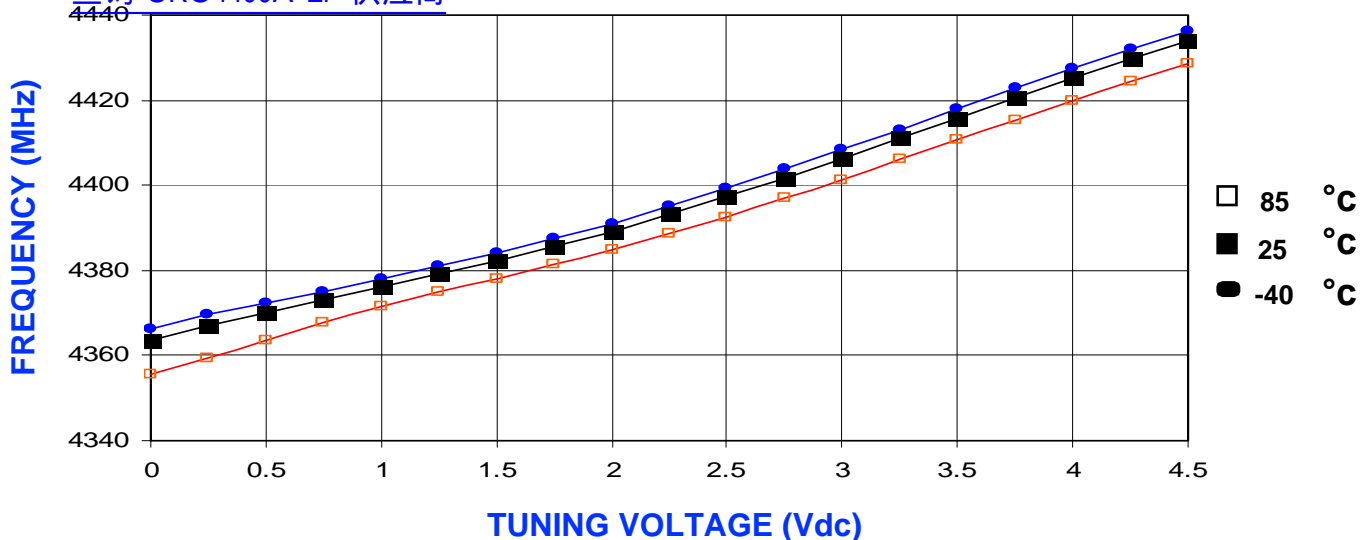

POWER CURVE, typ.

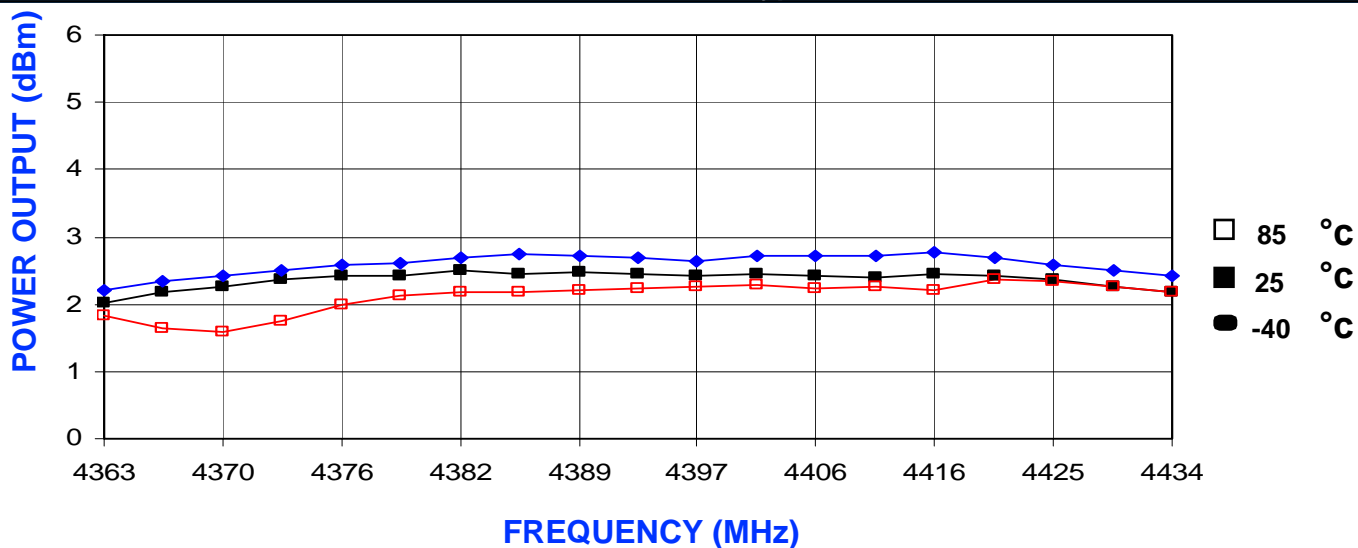

PHYSICAL DIMENSIONS

