

## MOS FIELD EFFECT TRANSISTOR **2SK3455**

## SWITCHING N-CHANNEL POWER MOS FET

#### **DESCRIPTION**

The 2SK3455 is N-channel DMOS FET device that features a low gate charge and excellent switching characteristics, designed for high voltage applications such as switching power supply, AC adapter.

### ORDERING INFORMATION

PART NUMBER	PACKAGE			
2SK3455	Isolated TO-220			

#### **FEATURES**

•Low gate charge

 $Q_G = 30 \text{ nC TYP.}$  ( $V_{DD} = 400 \text{ V}$ ,  $V_{GS} = 10 \text{ V}$ ,  $I_D = 12 \text{ A}$ )

- •Gate voltage rating ±30 V
- •Low on-state resistance

RDS(on) =  $0.60 \Omega$  MAX. (VGS = 10 V, ID = 6.0 A)

- Avalanche capability ratings
- •Isolated TO-220 package

## ABSOLUTE MAXIMUM RATINGS ( $T_A = 25$ °C)

Drain to Source Voltage (VGS = 0 V)	VDSS	500	V
Gate to Source Voltage (VDS = 0 V)	Vgss	±30	V
Drain Current (DC) (Tc = 25°C)	ID(DC)	±12	Α
Drain Current (Pulse) Note1	D(pulse)	±36	Α
Total Power Dissipation (T <sub>A</sub> = 25°C)	P <sub>T1</sub>	2.0	W
Total Power Dissipation (Tc = 25°C)	Рт2	50	W
Channel Temperature	Tch	150	°C
Storage Temperature	Tstg	−55 to +150	°C
Single Avalanche Current Note2	las	12	Α
Single Avalanche Energy Note2	Eas	103	mJ

**Notes 1.** PW  $\leq$  10  $\mu$ s, Duty Cycle  $\leq$  1%

**2.** Starting Tch = 25°C, VDD = 150 V, Rg = 25  $\Omega$ , Vgs = 20  $\rightarrow$  0 V

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version. Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.




**ELECTRICAL CHARACTERISTICS (TA = 25°C)** 


查询"2SK3455"供应商 CHARACTERISTICS	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Zero Gate Voltage Drain Current	Ipss	V <sub>DS</sub> = 500 V, V <sub>GS</sub> = 0 V			100	μΑ
Gate Leakage Current	Igss	Vgs = ±30 V, Vps = 0 V			±100	nA
Gate Cut-off Voltage	V <sub>GS(off)</sub>	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 1 mA	2.5		3.5	V
Forward Transfer Admittance	yfs	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 6.0 A	2.0			S
Drain to Source On-state Resistance	RDS(on)	Vgs = 10 V, ID = 6.0 A		0.50	0.60	Ω
Input Capacitance	Ciss	V <sub>DS</sub> = 10 V		1620		pF
Output Capacitance	Coss	V <sub>GS</sub> = 0 V		250		pF
Reverse Transfer Capacitance	Crss	f = 1 MHz		10		pF
Turn-on Delay Time	td(on)	V <sub>DD</sub> = 150 V, I <sub>D</sub> = 6.0 A		24		ns
Rise Time	tr	V <sub>GS</sub> = 10 V		18		ns
Turn-off Delay Time	td(off)	R <sub>G</sub> = 10 Ω		50		ns
Fall Time	tr			15		ns
Total Gate Charge	Q <sub>G</sub>	V <sub>DD</sub> = 400 V		30		nC
Gate to Source Charge	Qgs	V <sub>GS</sub> = 10 V		9		nC
Gate to Drain Charge	Q <sub>GD</sub>	I <sub>D</sub> = 12 A		11		nC
Body Diode Forward Voltage	VF(S-D)	IF = 12 A, VGS = 0 V		1.0		٧
Reverse Recovery Time	trr	IF = 12 A, Vgs = 0 V		1.5		μs
Reverse Recovery Charge	Qrr	di/dt = 50 A/ μs		11		μC


## **TEST CIRCUIT 1 AVALANCHE CAPABILITY**

# $\begin{array}{c} D.U.T. \\ R_G = 25 \Omega \\ V_{CS} = 20 \rightarrow 0 V \end{array}$



## TEST CIRCUIT 2 SWITCHING TIME






### **TEST CIRCUIT 3 GATE CHARGE**

$$\begin{array}{c|c} D.U.T. \\ \hline IG = 2 \text{ mA} \\ \hline \hline VDD \end{array}$$




## T查P的ASHCHAR NATE BISTICS (TA = 25°C)


#### DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE




### FORWARD TRANSFER CHARACTERISTICS




## GATE TO SOURCE CUT-OFF VOLTAGE vs. CHANNEL TEMPERATURE




## FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT



## DRAIN TO SOURCE ON-STATE RESISTANCE vs. GATE TO SOURCE VOLTAGE




#### DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT







## 查询"28K3455"供应商









## CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE




#### SWITCHING CHARACTERISTICS



## REVERSE RECOVERY TIME vs.




#### DYNAMIC INPUT/OUTPUT CHARACTERISTICS






## 查询"28K3455"供应商


## DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA




## TOTAL POWER DISSIPATION vs. CASE TEMPERATURE



#### FORWARD BIAS SAFE OPERATING AREA




#### TRANSIENT THERMAL RESISTANCE vs. PULSE WIDTH

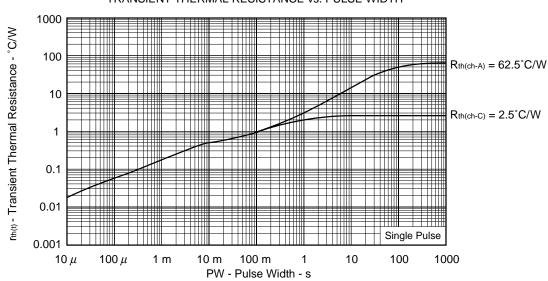


5



## 查询"2SK3物验供应商NCHE CURRENT vs. INDUCTIVE LOAD




## SINGLE AVALANCHE ENERGY DERATING FACTOR






## P查G的AGE DRAWHNG あJnit: mm)

## Isolated TO-220 (MP-45F)

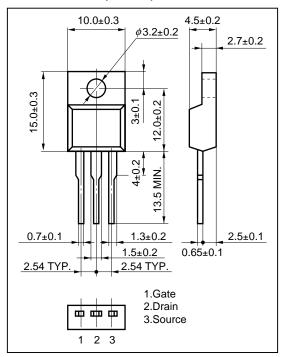

## **EQUIVALENT CIRCUIT**



**Remark** Strong electric field, when exposed to this device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it once, when it has occurred.

Data Sheet D14757EJ1V0DS

7

## 查询"2SK3455"供应商

- The information in this document is current as of May, 2002. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of
  third parties by or arising from the use of NEC semiconductor products listed in this document or any other
  liability arising from the use of such products. No license, express, implied or otherwise, is granted under any
  patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative
  purposes in semiconductor product operation and application examples. The incorporation of these
  circuits, software and information in the design of customer's equipment shall be done under the full
  responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third
  parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers
  agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize
  risks of damage to property or injury (including death) to persons arising from defects in NEC
  semiconductor products, customers must incorporate sufficient safety measures in their design, such as
  redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
  - "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
  - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
  - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
  - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

- (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).