

[查询MM1530供应商](#)

Precision Adjustable Shunt Regulator Monolithic IC MM1530 AT/AN

Outline

The MM1530AT/AN is 3-terminal adjustable shunt regulator, which provides a highly accurate 0.8% bandgap reference voltage. The output voltage can be adjusted to any value between reference voltage V_{REF} and 12 volts with two external resistors. Moreover, there are a lot of ranges of the application as a zener diode besides the replacement is possible because it has steep turn-on characteristics.


Features

- | | |
|-----------------------------------|----------------------------|
| 1. Reference voltage tolerance | $V_{REF}=1.260V\pm0.8\%$ |
| 2. Output voltage can be adjusted | $V_{REF}\leq V_o\leq 12V$ |
| 3. Low Dynamic Output Impedance | $ Z_{KA} =0.13\Omega$ typ. |

Package


TO-92 (TAPING)
 SOT-25A

Pin Assignment



TO-92
 (TAPING)

1	Reference
2	Anode
3	Cathode




SOT-25A
 (TOP VIEW)

1	NC
2	SUB
3	Cathode
4	Reference
5	Anode

note:The second terminal is SUB, so connect the terminal to GND.

查询"MM1530"供应商
Equivalent Circuit Diagram

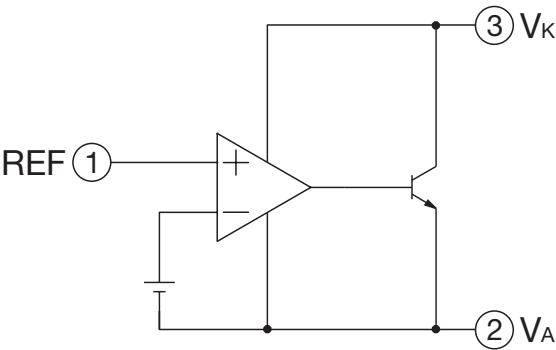

* TO-92 Package

Absolute Maximum Ratings (Ambient Temperature, Ta=25°C)

Item	Symbol	Ratings	Unit
Operating Temperature	T _{OPR}	-30~+85	°C
Storage Temperature	T _{STG}	-40~+125	°C
Cathode to Anode voltage	V _{KA}	12	V
Cathode current	I _K	50	mA
Reference input current	I _{REF}	50	μA
Allowable loss	P _d	500 (TO-92) 150 (SOT-25A)	mW

Recommended Operating Conditions (Ambient Temperature, Ta=25°C)

Cathode to Anode voltage	V _{KA}	V _{REF} ~12	V
Cathode current	I _K	1~30	mA


查询"MM1530"供应商

Electrical Characteristics (Ambient Temperature, $T_a=25^\circ\text{C}$)


Item	Symbol	Measurement conditions	Min.	Typ.	Max.	Unit
Reference voltage	V_{REF}	$V_{\text{KA}}=V_{\text{REF}}$	1.250	1.260	1.270	V
Reference voltage deviation over temperature range	$\Delta V_{\text{REF}}/\Delta T_a$	$V_{\text{KA}}=V_{\text{REF}} \quad T_a=0\sim+70^\circ\text{C}$		3	12	mV
Load regulation	$\Delta V_{\text{REF}}/\Delta V_{\text{KA}}$	$\Delta V_{\text{KA}}=V_{\text{REF}}, V_{\text{REF}} \leq V_{\text{KA}}\leq 5\text{V}$		1.0	2.7	mV/V
		$5\text{V}\leq V_{\text{KA}}\leq 12\text{V}$		1.0	2.0	mV/V
Reference input current	I_{REF}	$V_{\text{KA}}=V_{\text{REF}} \quad R_1=10\text{K}, R_2=\infty$		2	4	μA
Reference input current deviation over temperature range	$\Delta I_{\text{REF}}/\Delta T_a$	$V_{\text{KA}}=V_{\text{REF}}, R_1=10\text{K}, R_2=\infty \quad T_a=0\sim+70^\circ\text{C}$		0.3	1.2	μA
Minimum Cathode Current	$I_{\text{Kmin.}}$	$V_{\text{KA}}=V_{\text{REF}}, \Delta V_{\text{REF}}=2\%$		0.15	0.3	mA
Off-state Cathode Current	I_{OFF}	$V_{\text{KA}}=12\text{V}, V_{\text{REF}}=0\text{V}$		0.1	1.0	μA
Dynamic Impedance	$ Z_{\text{KA}} $	$V_{\text{KA}}=V_{\text{REF}}, f\leq 1\text{kHz} \quad I_{\text{K}}=1\sim 30\text{mA}$		0.13	0.5	Ω

Measuring Circuit


(1) $V_{\text{KA}}=V_{\text{REF}}$

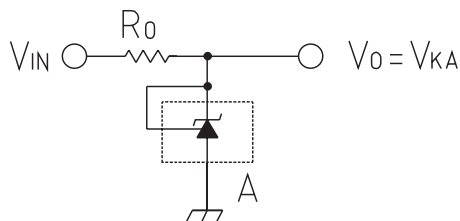


(3) I_{OFF}

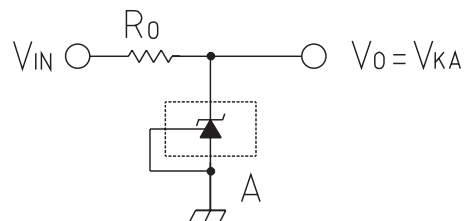

(2) $V_{\text{KA}}\geq V_{\text{REF}} \quad V_O=V_{\text{KA}}=V_{\text{REF}}$

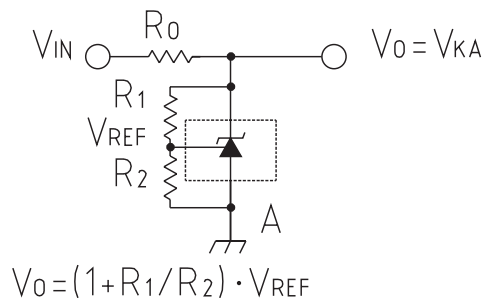


(4) Open Loop Voltage Gain

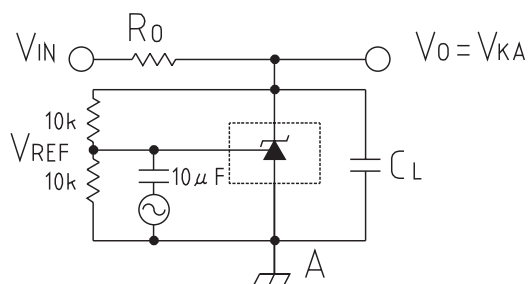


查询"MM1530"供应商
Characteristics


High Voltage Operating Characteristics

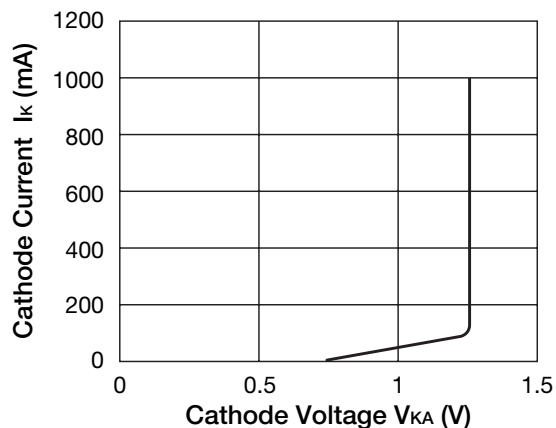


Input Current

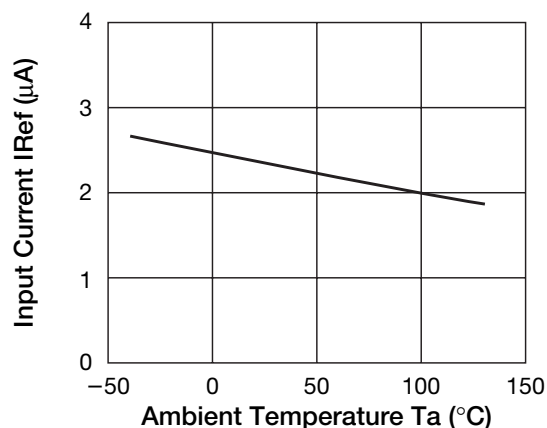


Low Current Operating Characteristics

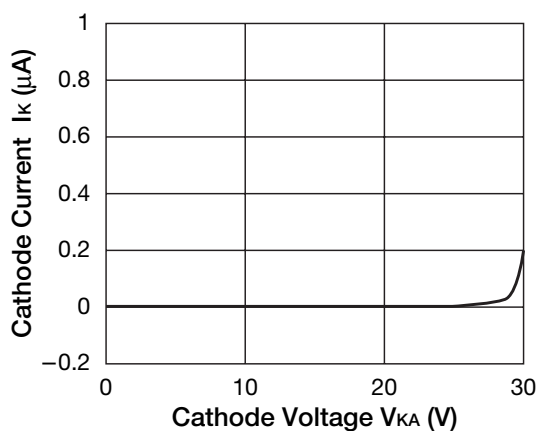


Reference Voltage

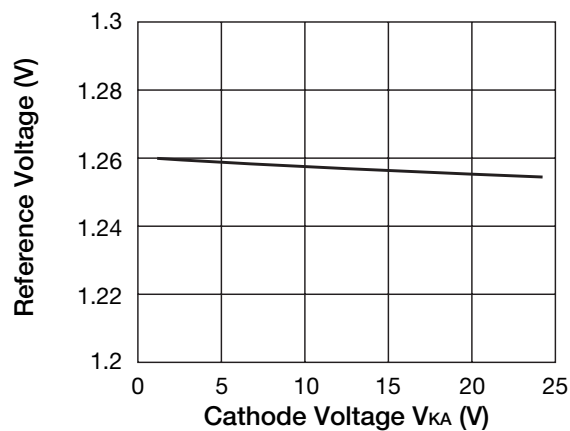

Detection Voltage Character

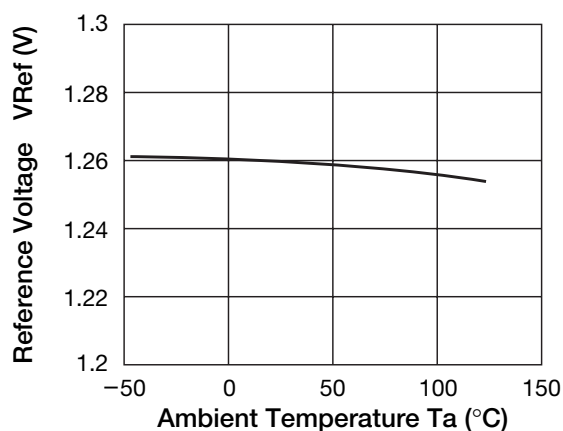


Off State Leakage

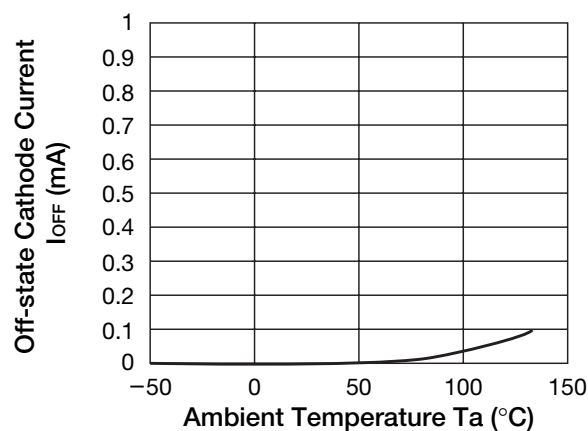


[查询"MM1530"供应商](#)


Dynamic Output Impedance

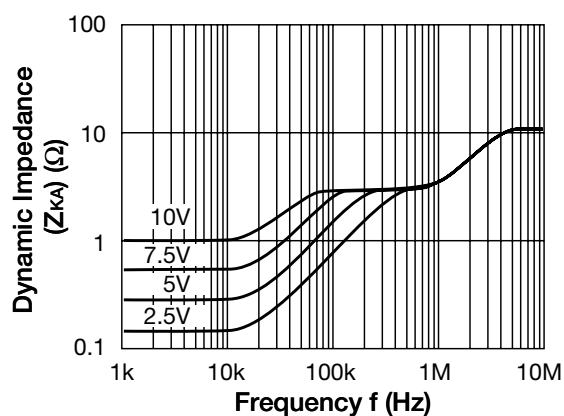


Open loop Voltage Gain · Phase

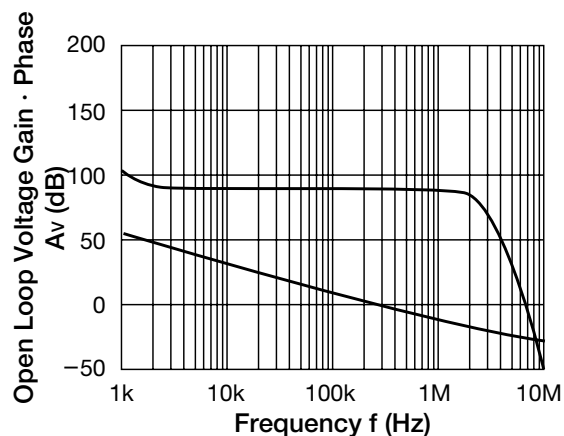

Pulse Response

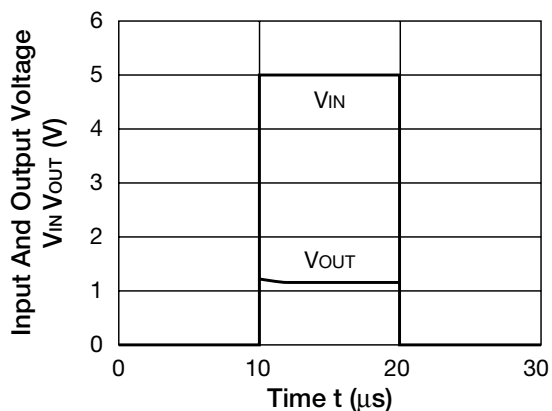

Stability Boundary Conditions

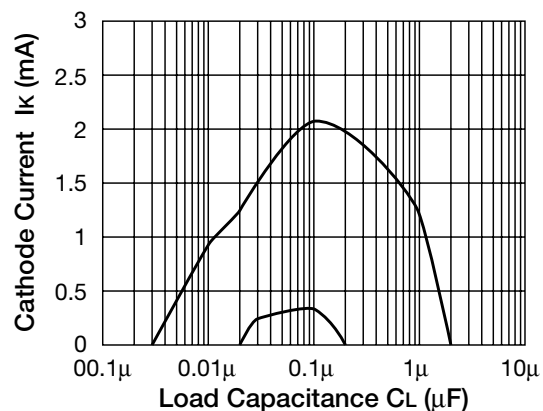

Notes concerning stability operation region

The MM1431AT/AN requires external capacitors for regulator stability. These capacitors must be correctly selected for good performance.